


1 2 3 4 5 6 7 8

A

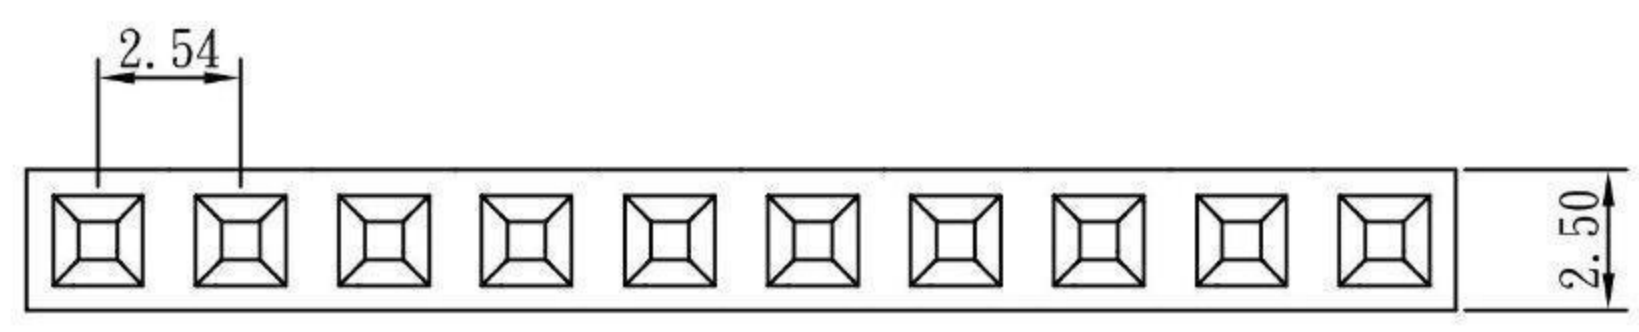


B


SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 PBT
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

C

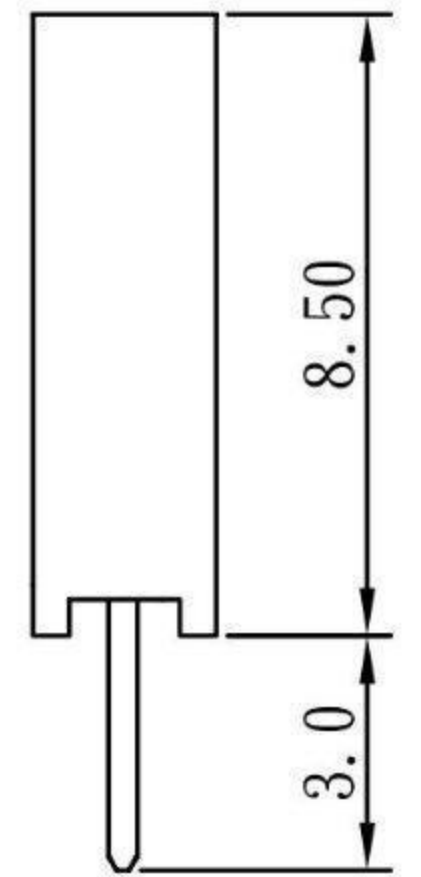


D

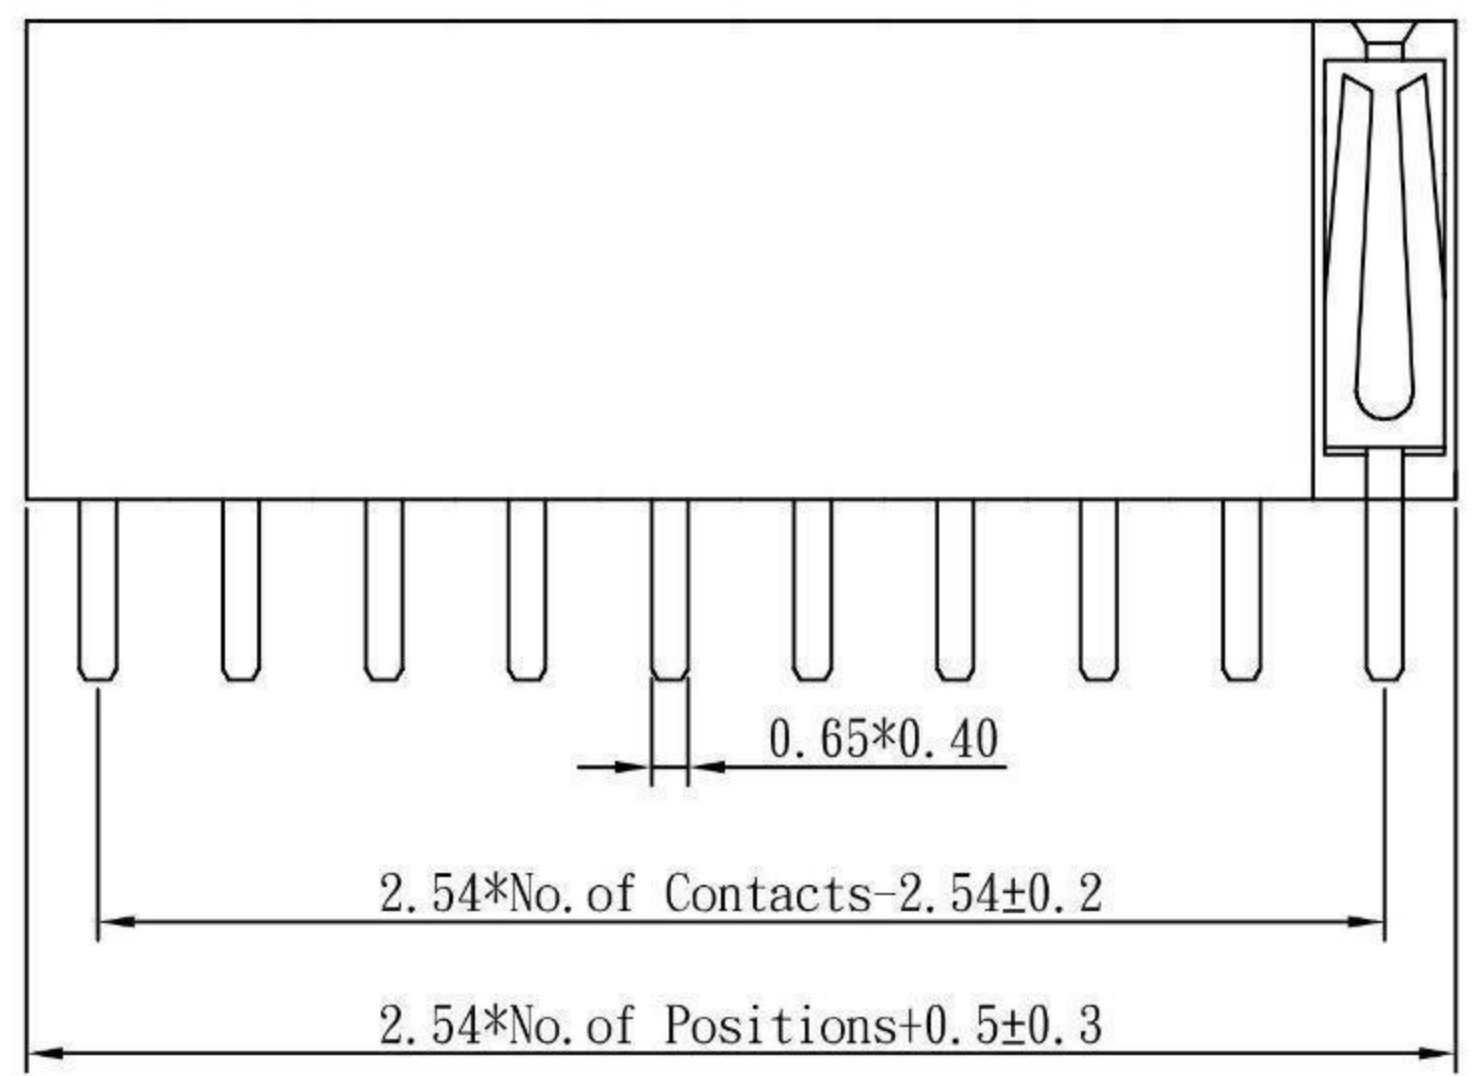

E

F

G

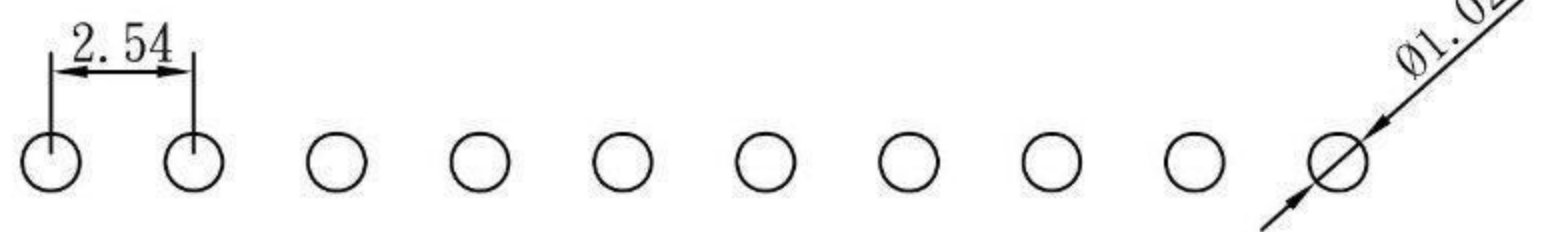

PCB LAYOUT

"Solder temp. in oven is max. 180 degree C for 3 sec."

H

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日	Helen 2017/6/5	TOLERANCE X: ±0.30 XX: ±0.20 XXX: ±0.05 X*: ±1° XX*: ±0.05° X*: ±0.05°	PART NAME 品名 2.54mm FEMALE HEADER SINGLE ROW H:8.4mm 1X??P STRAIGHT TYPE ROHS PART NO. 料號 C2806-XXASXHOOR
		SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	SIZE 紙張尺寸 A4 REV. 版本 A

1 2 3 4 5 6 7 8