

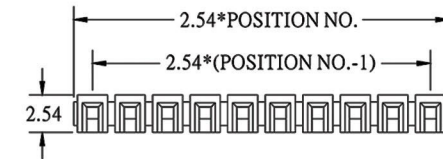

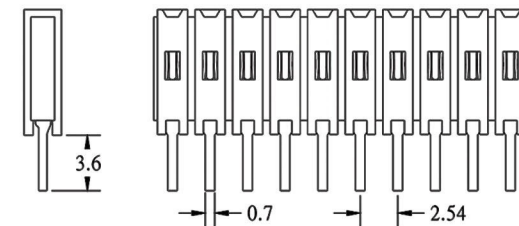




P/N: C2808-XXBSXH00R

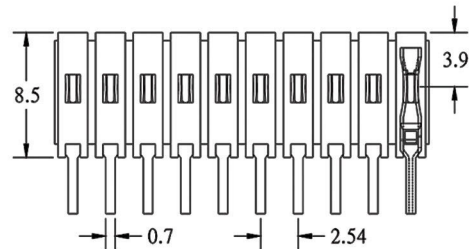

P/N: C2808-XXASXG00R

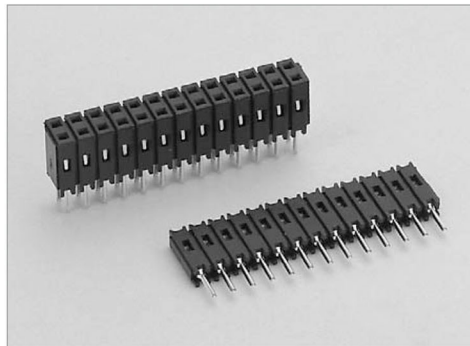

RECOMMENDED P.C.B LAYOUT



RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

“Solder temp. In oven is max. 260 degree C for 3~4 sec.”

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 Helen 2012/6/22	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 / 1	TOLERANCE 容許公差 .0 ± 0.2 .00 ± ANG. ± SIZE. 紙張尺寸 A 4 REV. 版次 B	PART NAME 品名 2.54mm SKYLIGHT FEMALE HEADER H:8.5mm 1XXXP/2XXXP STRAIGHT TYPE LOW-LEAD PART NO. 料號 C2808-XXXSXH00R