




# SPECIFICATIONS

## Material




Insulator : PBT, glass reinforced, rated UL 94V-0  
 Contact : Phosphor Bronze

## Electrical

Current Rating : 1 Amp  
 Contact Resistance : 30 mΩ max.  
 Insulation Resistance : 3000 MΩ min.  
 Dielectric Withstanding Voltage : 500V AC for 1minute  
 Operating Temperature : -40°C to +105°C

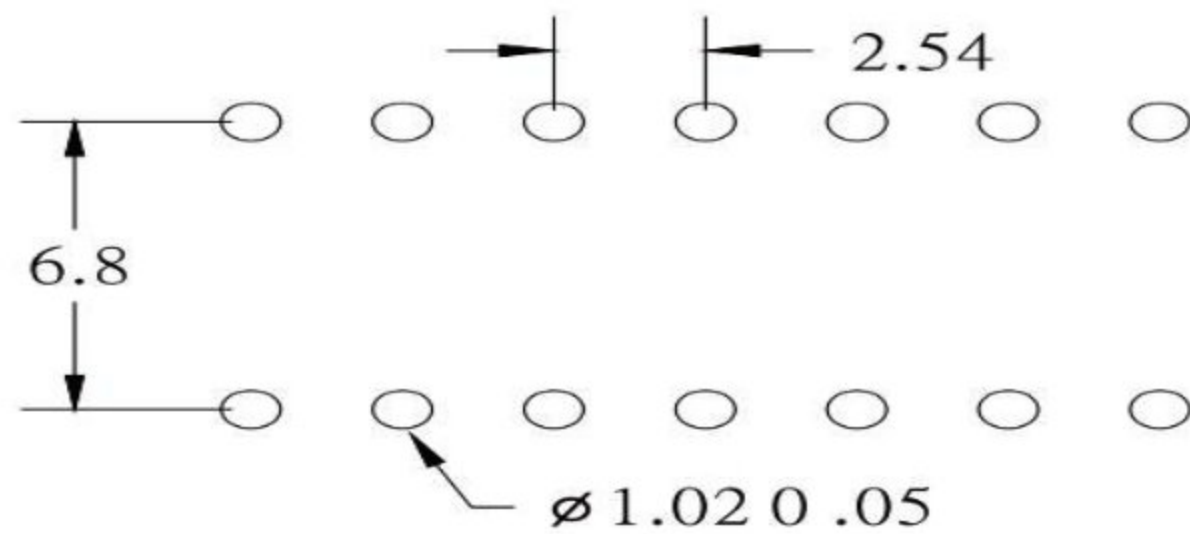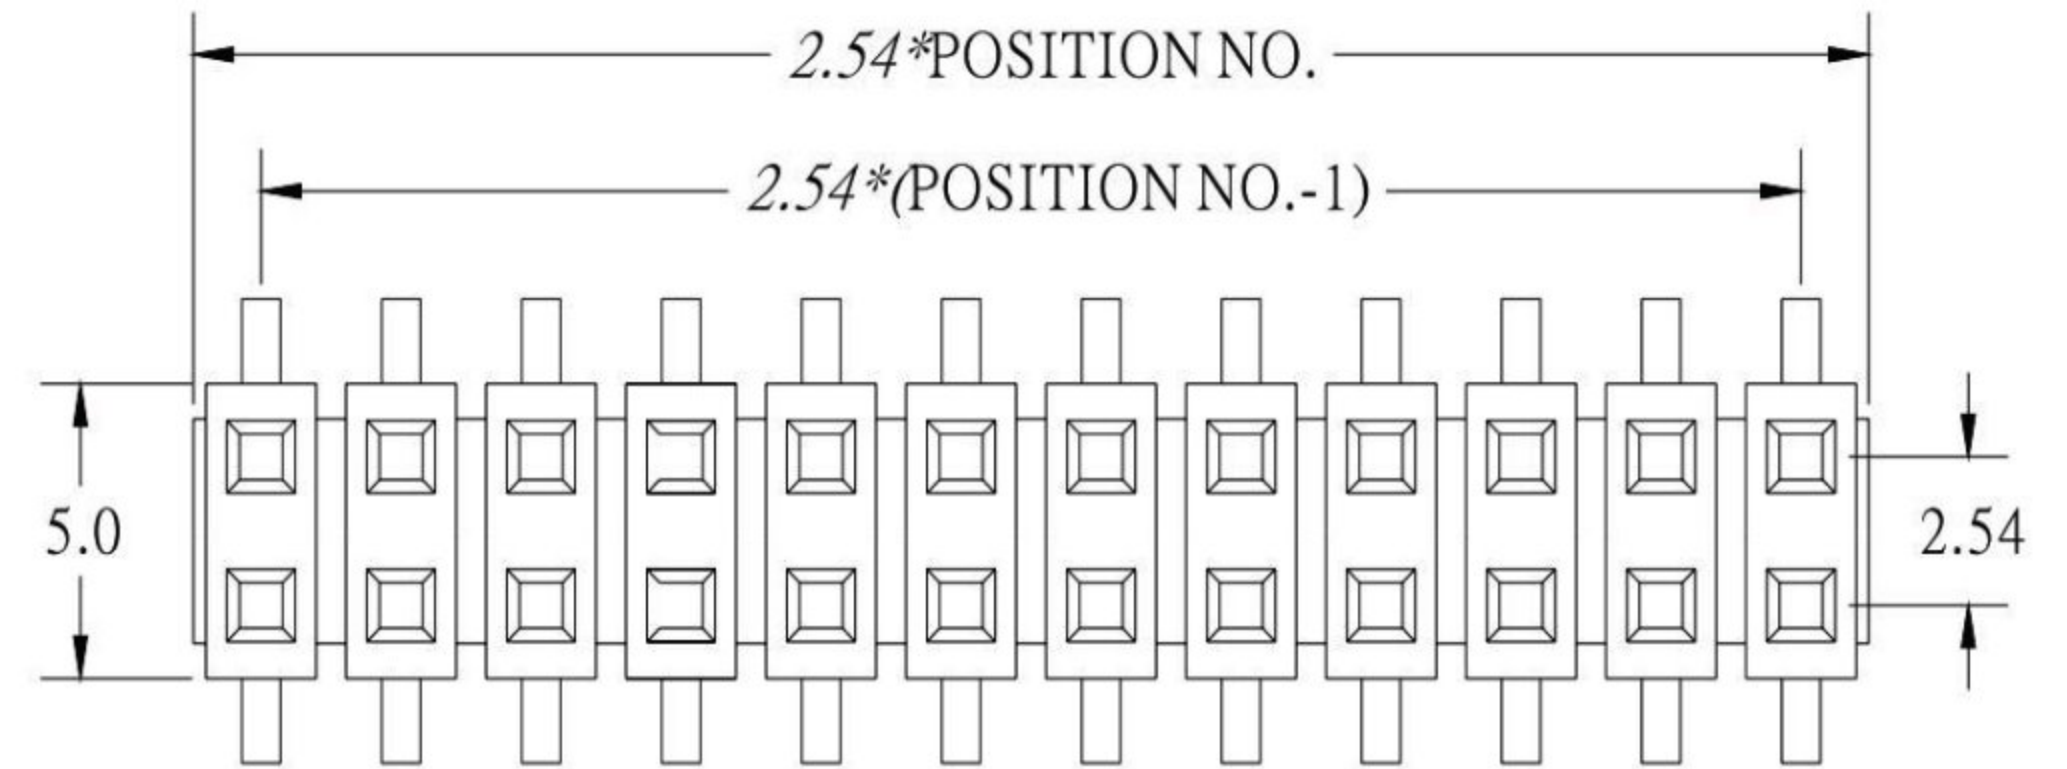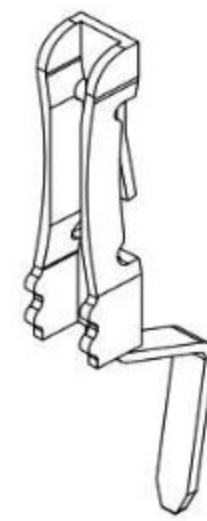

RECOMMENDED P.C.B LAYOUT

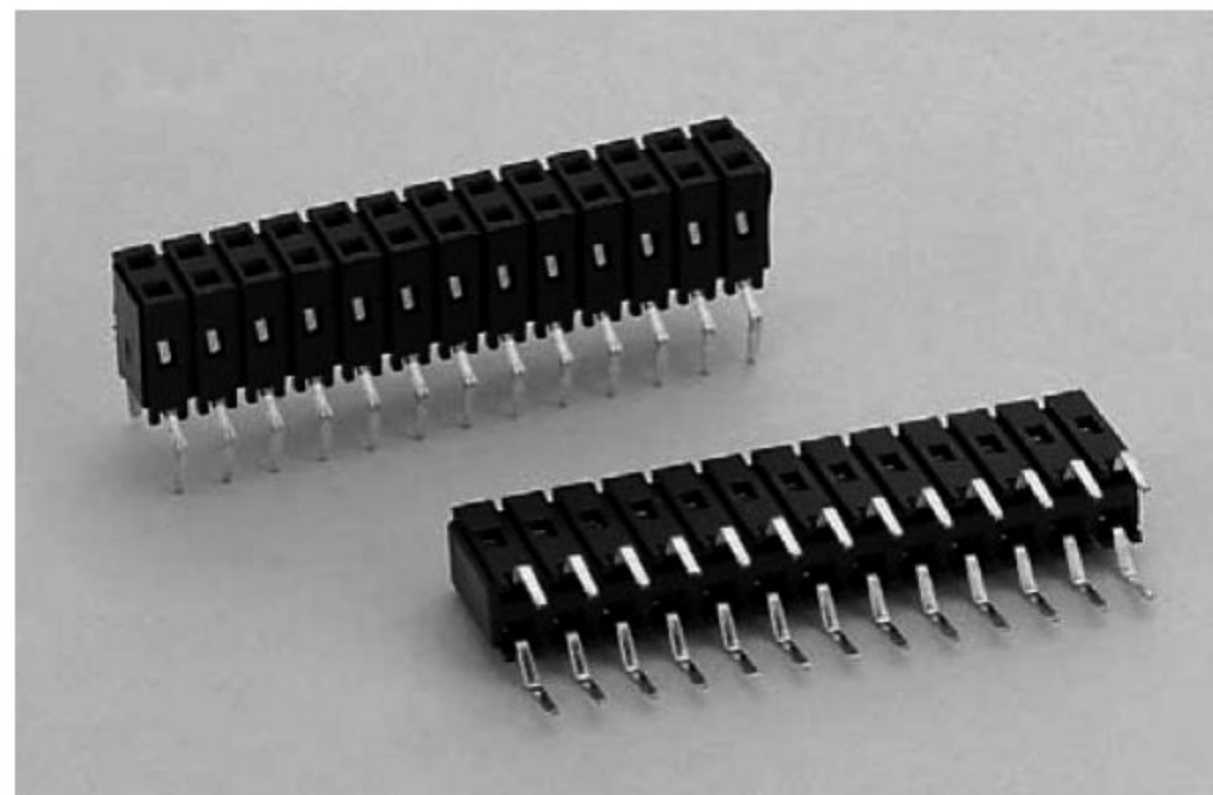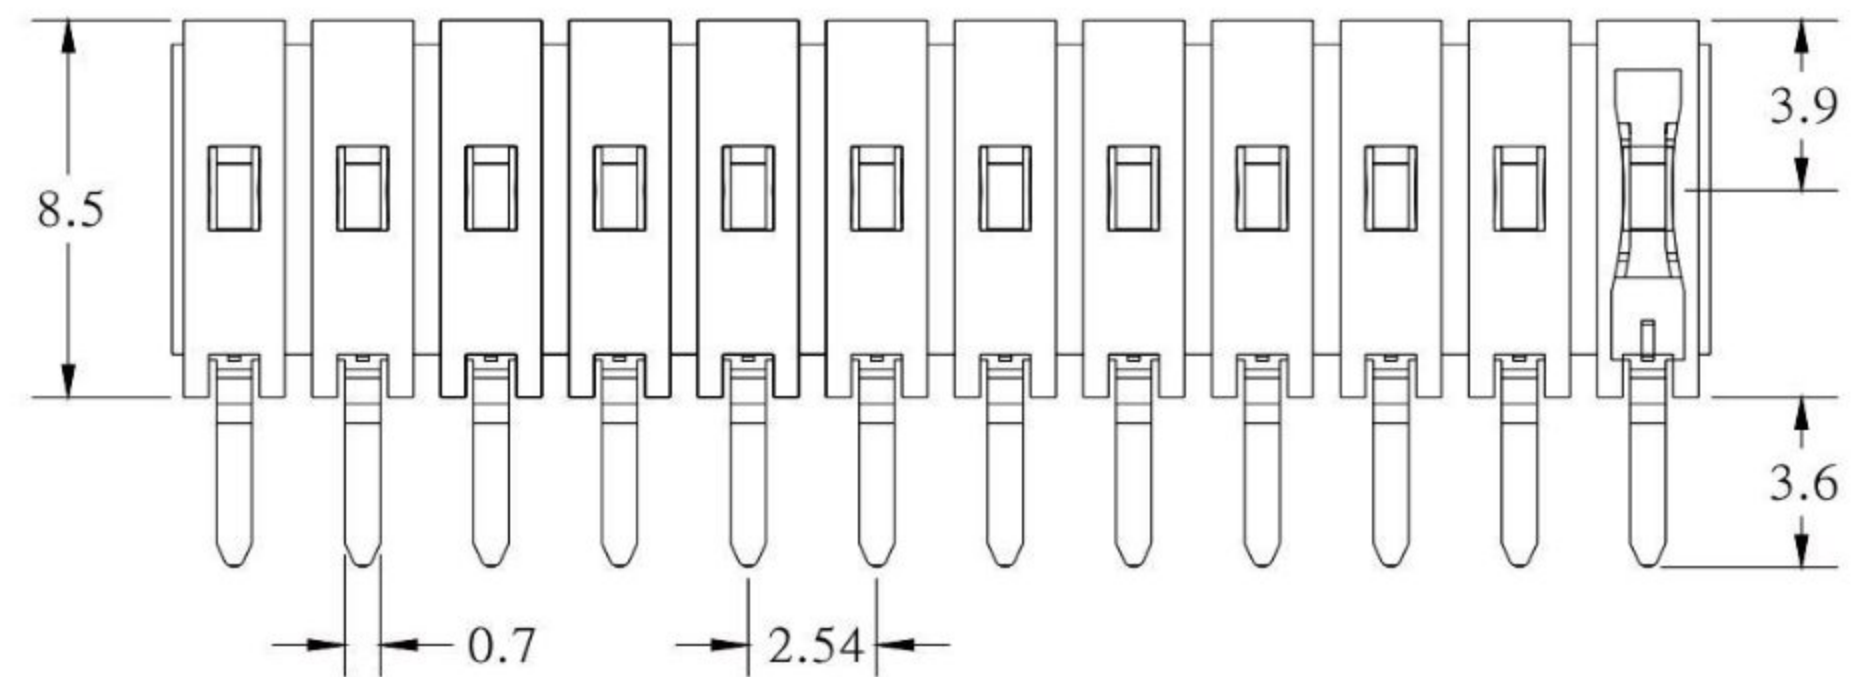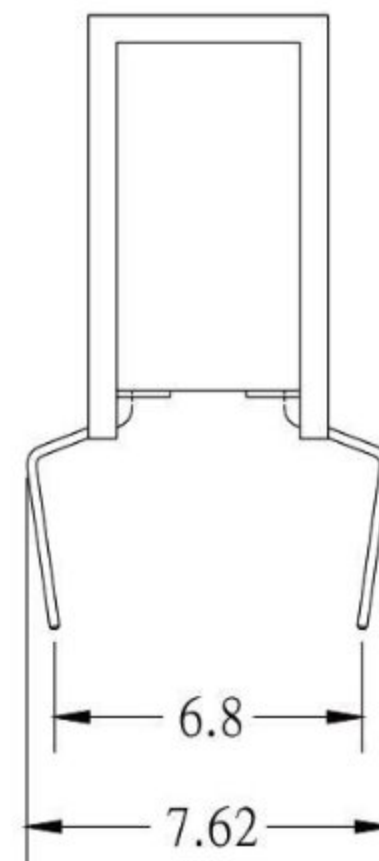

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2.54mm SKYLIGHT FEMALE HEADER DUAL ROW H:8.5mm 2X??P STRAIGHT TYPE W/ KINK GOLD FLASH PLATING ROHS
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C2809-XXBBGH00R
DATE 制表日 2010/2/25	PAGE 張數 1 OF 1	REV. 版本 A	