

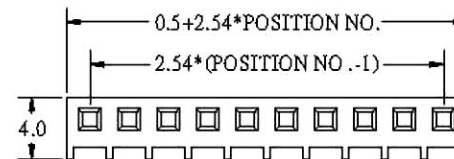




C2810-XXBSGH00R




C2810-XXASGH00R

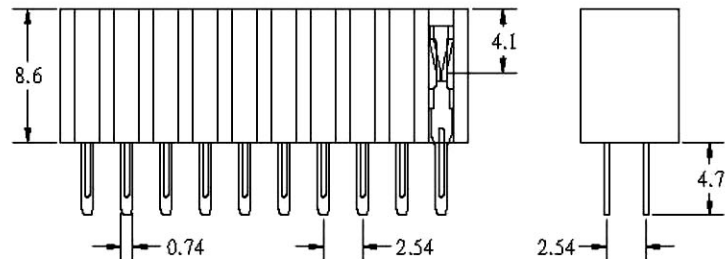

RECOMMENDED P.C.B LAYOUT

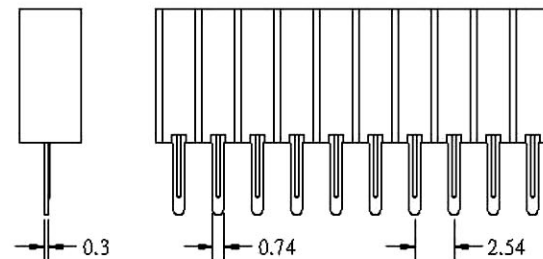

RECOMMENDED P.C.B LAYOUT

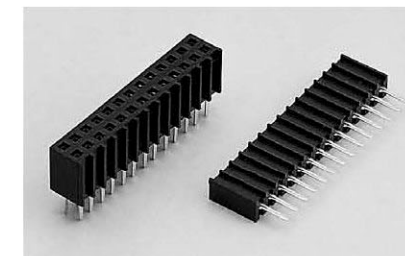

**SPECIFICATIONS**

**Material**

Insulator : PBT, glass reinforced, rated UL 94V-0  
 Contact : Brass

**Electrical**

Current Rating : 1 Amp  
 Contact Resistance : 30 mΩ max.  
 Insulation Resistance : 3000 MΩ min.  
 Dielectric Withstanding Voltage : 500V AC for 1minute  
 Operating Temperature : -40°C to +105°C

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 0.00 ± .00 ± ANG. ±	PART NAME 品名 2.54mm WAVY FEMALE HEADER H:8.6mm 2X??P STRAIGHT PIN LENGTH=4.7mm ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C2810-XXXSXH00R
DATE 制表日 2011/07/26	PAGE 張數 1 OF 1	REV. 版本 A	