


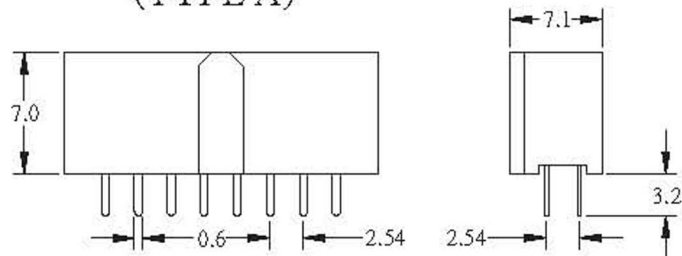




(TYPE A)

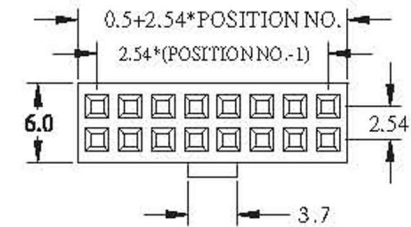

RECOMMENDED P.C.B LAYOUT



(TYPE B)

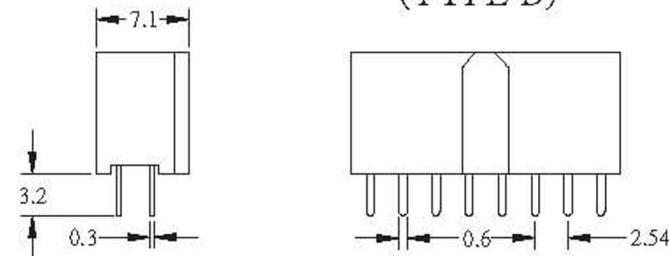

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel	SCALE 比例 參考	TOLERANCE 容許公差 .00 ± .00 ± ANG. ±	PART NAME 品名 2.54mm FEMALE HEADER DUAL ROW XXP STRAIGHT TYPE WITH BUMP A TYPE PIN LENGTH=3.2mm ROHS LOW-LEAD
DWG. 製圖 Yumi		UNIT 單位 M M	PART NO. 料號 C2811-XXBSXHX0R
DATE 制表日 2008/02/27	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4	REV. 版次 A