


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

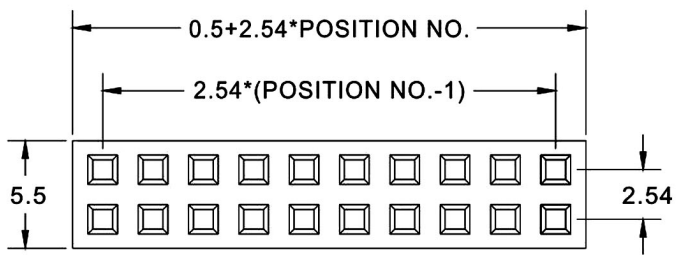





SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0
Contact : Brass

Electrical

Current Rating : 1 Amp
Contact Resistance : 30 mΩ max.
Insulation Resistance : 3000 MΩ min.
Dielectric Withstanding Voltage : 500V AC for 1minute
Operating Temperature : -40°C to +105°C

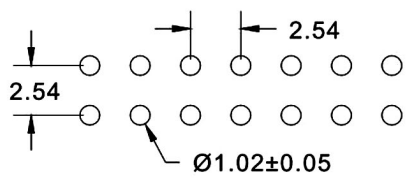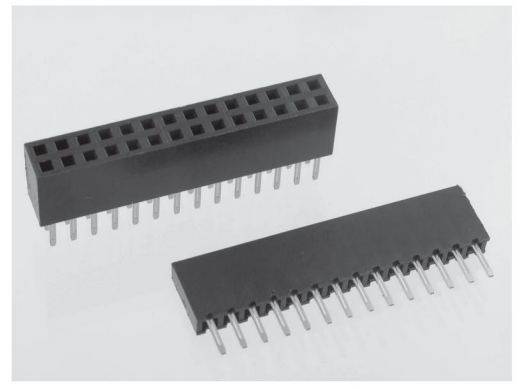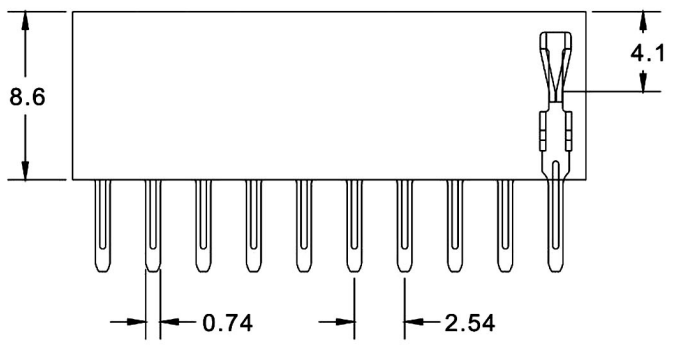

RECOMMENDED P.C.B LAYOUT

1 2 3 4 5 6 7 8

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE 紙張尺寸	2.54mm FEMALE HEADER DUAL ROWS H:8.6mm 2XXXP THREE CONTACT STRAIGHT TYPE GOLD FLASH PLATING ROHS
DATE 制表日	PAGE 張數	REV. 版次	PART NO. 料號
2015/02/10	1 OF 1	A	C2812-XXBSGH00R

Betty