

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F


F

G




G

H

H

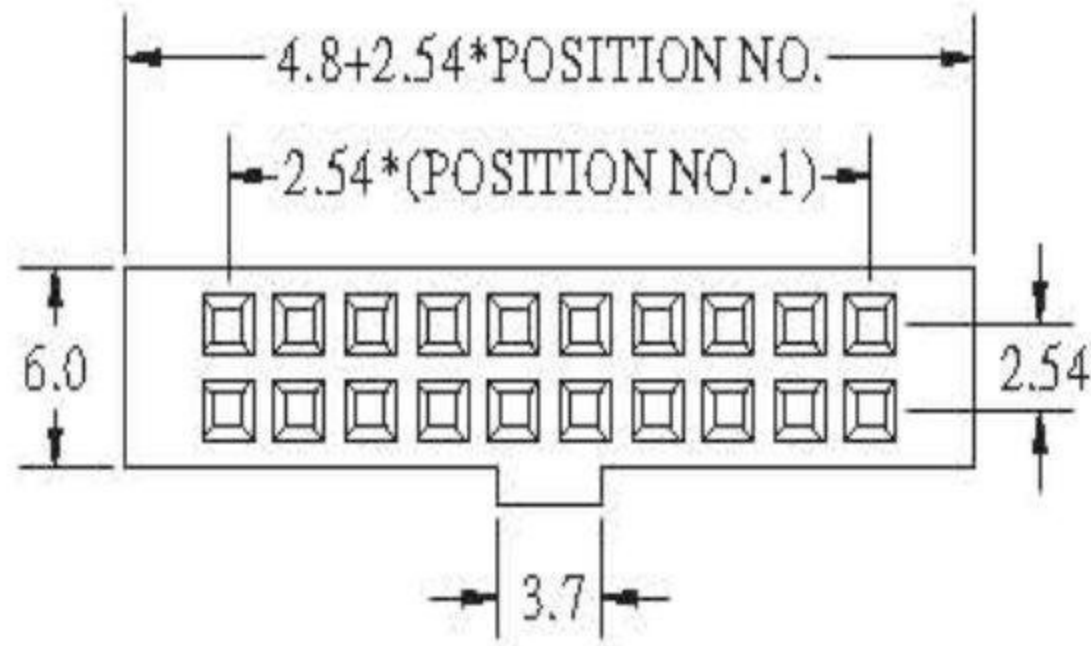

(TYPE A)

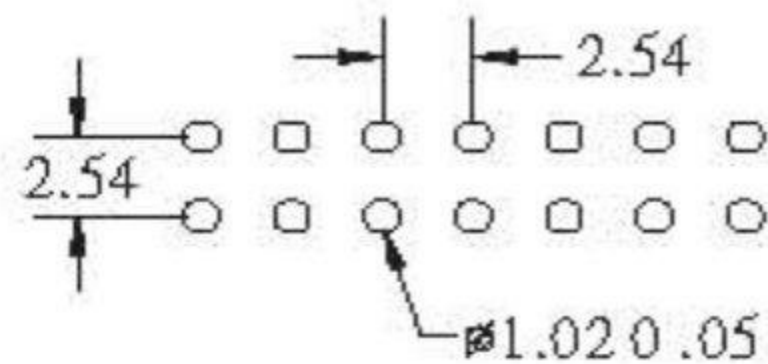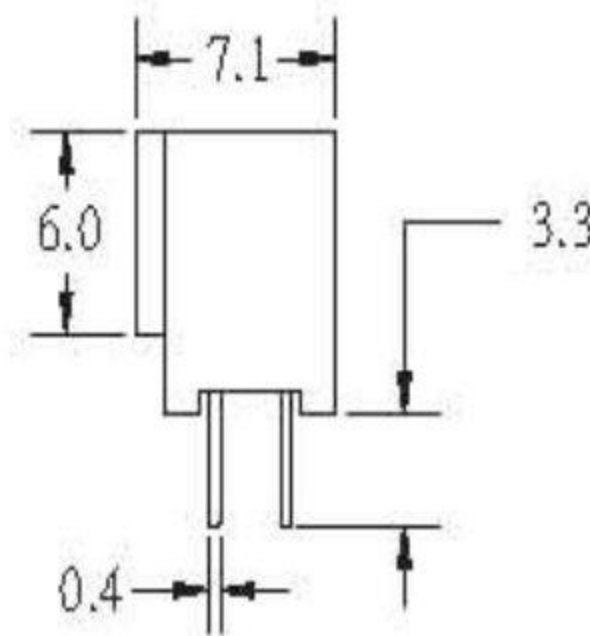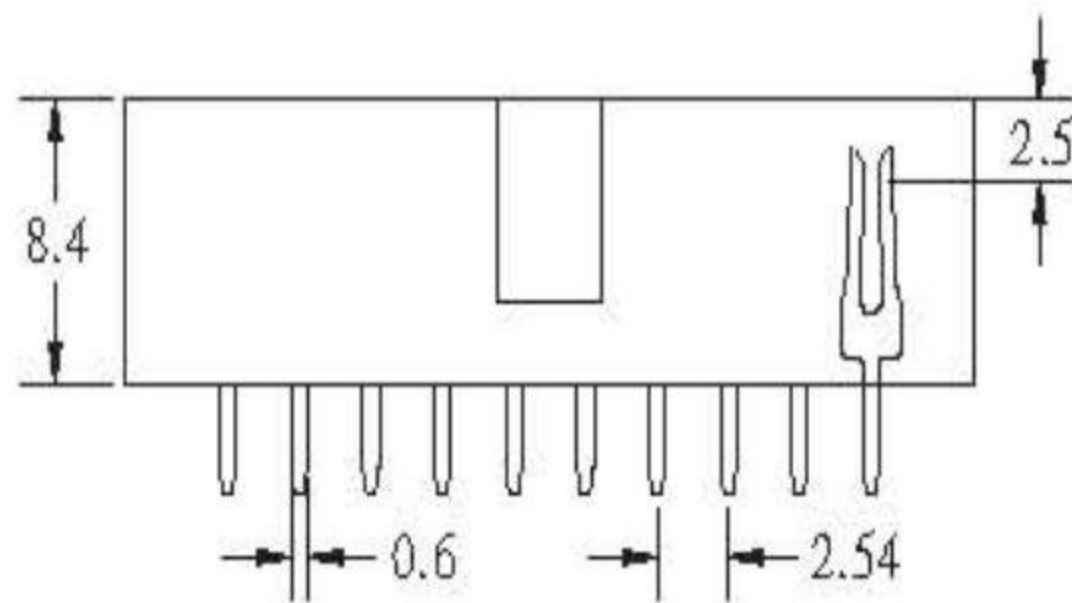

RECOMMENDED P.C.B LAYOUT

### SPECIFICATIONS

#### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

#### Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 BETTY		TOLERANCE 容許公差	PART NAME 品名 2.54mm FEMALE HEADER W/BUMP DUAL ROW H:8.5mm 2*XXP STRAIGHT TYPE PIN LENGTH=3.2mm GOLD PLATING ROHS
DWG. 製圖 KAREN		SCALE 比例 參考	
DATE 制表日 2011/10/14	UNIT 單位 MM	PAGE 張數 1 OF 1	REV. 版本 B
PART NO. 料號 C2817-XXBSGH00R			

1

2

3

4

5

6

7

8