

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C


D

E




F

G

H

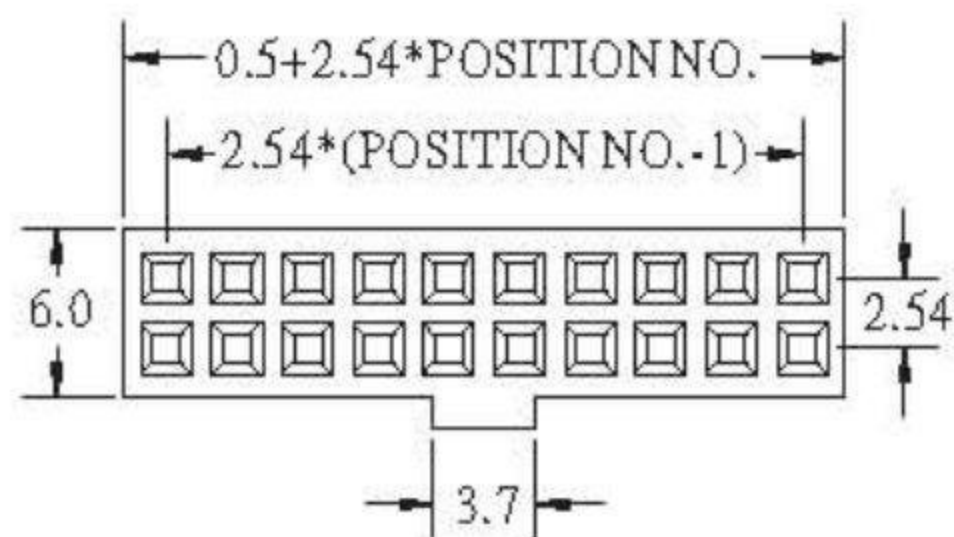

(TYPE B)

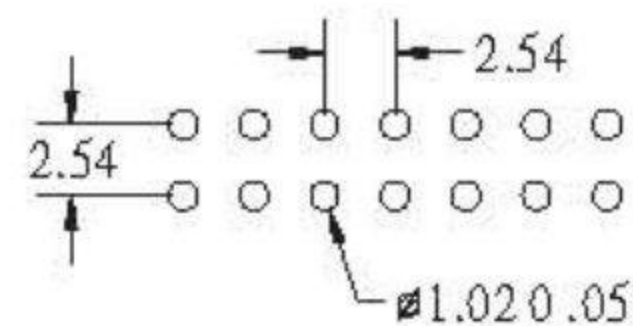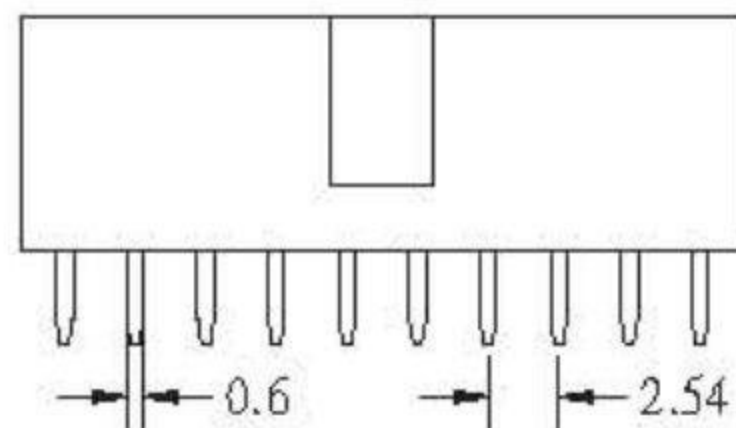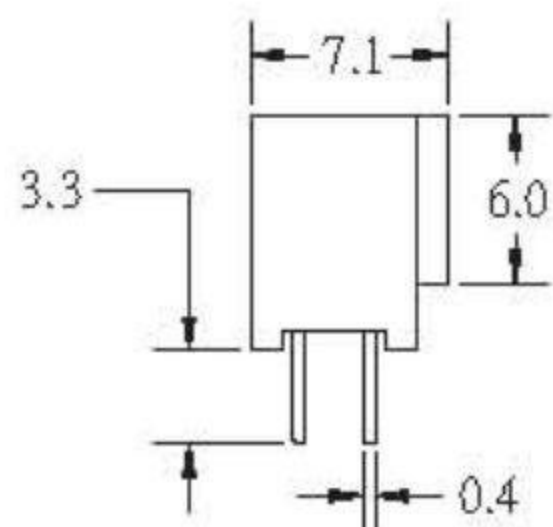

RECOMMENDED P.C.B LAYOUT

### SPECIFICATIONS

#### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

#### Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2.54mm FEMALE HEADER W/BUMP DUAL ROW H:8.5mm 2*XXP STRAIGHT TYPE PIN LENGTH=3.2mm GOLD PLATING ROHS LOW-LEAD
DWG. 製圖 KAREN		UNIT 單位 MM	
DATE 制表日 2011/10/14	PAGE 張數 1 OF 1	REV. 版本 B	PART NO. 料號 C2817-XXBSGH01R

1

2

3

4

5

6

7

8