


Specifications
 Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

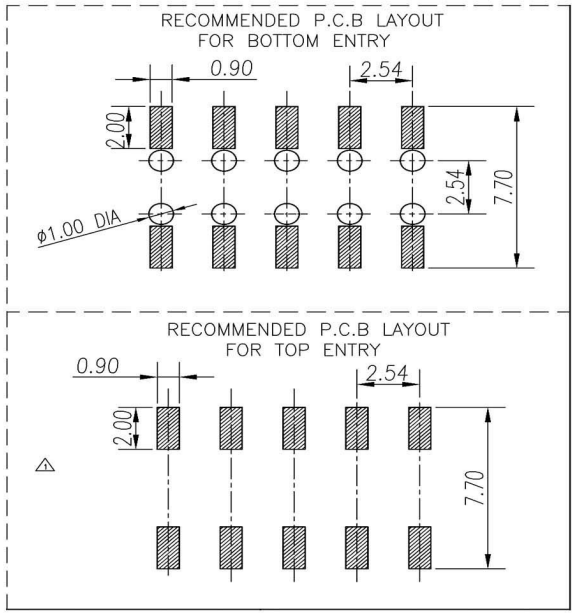

C 2818 — 06 B D G H N P R

- 1. PRODUCTS: C:Connector
- 2. SERIES NO.: 2818
- 3. CONTACT NO.: 08,10,14,16,20,24,26,30,34,40,44,48,50,60,64
- 4. ROW TYPE: B: Dual Rows
- 5. CONTACT TYPE: D:S.M.T.
- 6. CONTACT PLATING: G:Gold Flash
- 7. INSULATOR HEIGHT: H:3.56mm
- 8. BODY OPTION: N:W/O Locating Peg
- 9. PACKING STYLE: P:PAD+Tube Packing, Q:PAD+Reel Packing
- 10. R:ROHS

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例 参考	GENERAL TOLERANCE	PART NAME 品名
DWG. 製圖 Betty		UNIT 單位 M M	2.54mm FEMALE HEADER DUAL ROWS H=3.56mm SMT TYPE 2XXXP WITHOUT LOCATING PEG ROHS
DATE 制表日 2014/05/13	PAGE 張數 1 OF 1	SIZE. 紙張尺寸 A 4	PART NO. 料號 C2818-XXBDXHNXR
		REV. 版次 B	