


Specifications
 Current Rating: 3Amp Δ
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Δ With peg in 2X2Pin only.

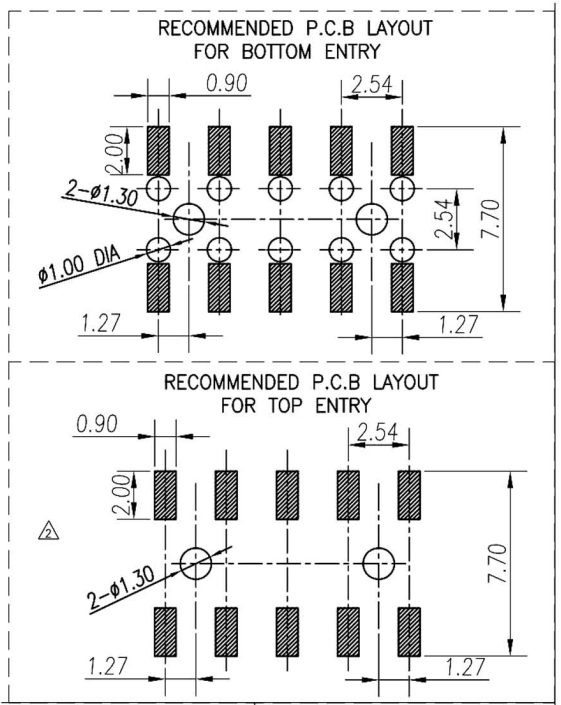

RoHS Compliant **HSM** 玄茂科技股份有限公司
 HSIUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	Betty	SCALE 比例 参考	GENERAL TOLERANCE X*45.0° X±0.30 X*43.0° X±0.25 XX*42.0° XX±0.15 XXX*41.0° XXX±0.10	PART NAME 品名 2.54mm FEMALE HEADER DUAL ROW H=3.56mm SMT TYPE 2XXXP WITH LOCATING PEG ROHS
DWG. 製圖	Betty			
DATE 制表日	2013/04/11	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 C2818-XXBDXHYXR