


Specifications

Current Rating:3Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:Thermoplastic, UL 94V-0  
 PBT or the equivalent material

Recommended P.C.Board  
 Layout  
 (Tolerance:±0.05)

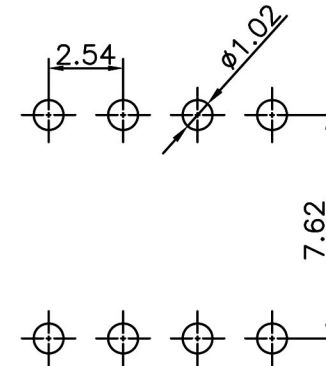

**RoHS Compliant** **HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准		GENERAL TOLERANCE		PART NAME 品名
DWG. 製圖		X'±5.0'	X.±0.30	
DATE 制表日	.X'±3.0'	.X.±0.25	PART NO. 料號 C2821-XXAIXHT0R	
2013/10/22	.XX'±2.0'	.XX.±0.15		
	.XXX'±1.0'	.XXX.±0.10		
	SCALE 比例	參考	UNIT 單位	MM
	PAGE 張數	1 / 1	REV. 版次	A