

Specifications


Current Rating: 3Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 PBT

Recommended P.C.Board

Hole Layout

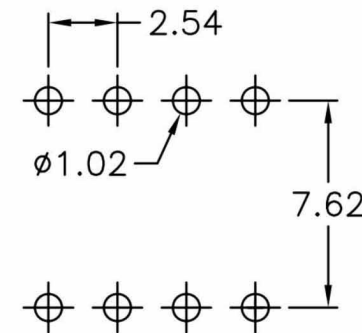

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		GENERAL TOLERANCE X'±0.5' X ± X'±2' X ±0.38 XX'±1' XX ±0.25 .XXX'±0.5' .XXX ±0.13	PART NAME 品名 2.54mm SIDE ENTRY FEMALE HEADER DUAL ROW H:5.95mm ROW PITCH:7.62mm 2XXXP PIN LENGTH=3mm TUBE PACKING ROHS
DWG. 製圖	Hedy	SCALE 比例 參考	PART NO. 料號 C2821-XXBIXAT0R
DATE 制表日 2012/08/29	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	
PAGE 張數 1 OF 1	REV. 版次 A		