

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C


D

E





F

G

H

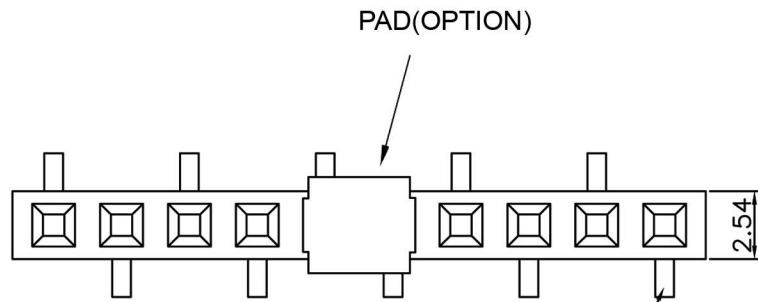

Specifications  
 Current Rating:3Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material: Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T or the equivalent material

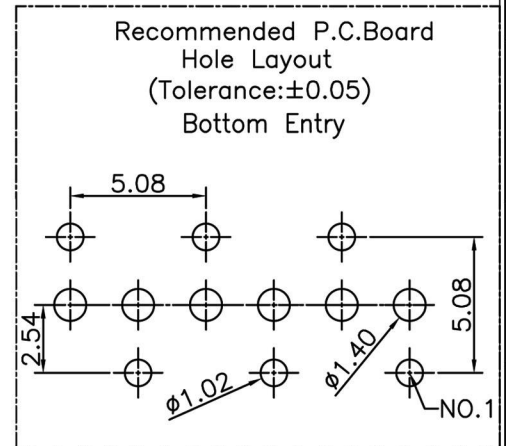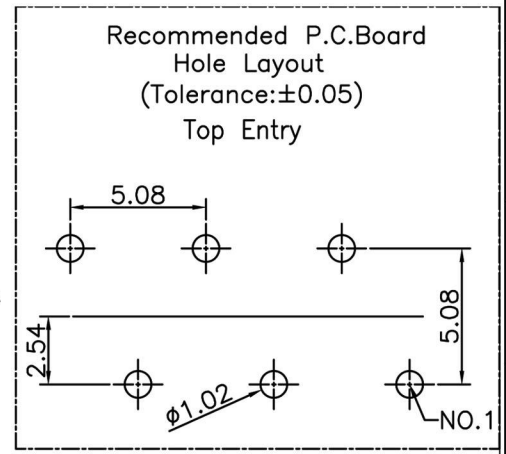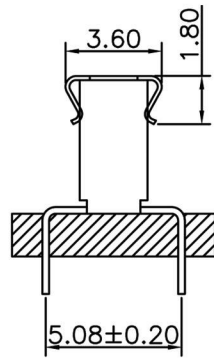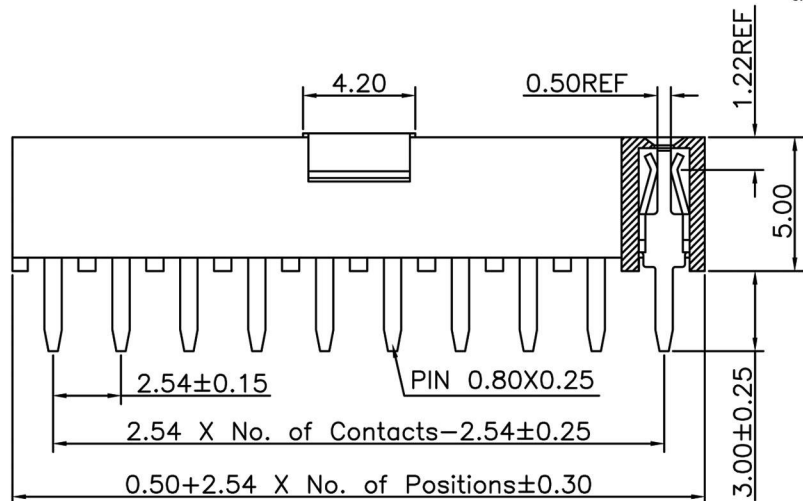

Ordering Information

|                       |         |                       |  |   |  |
|-----------------------|---------|-----------------------|--|---|--|
| <b>RoHS Compliant</b> |         | <b>HSM 玄茂科技股份有限公司</b> |  | <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>                                   |  |
| APPD. 核准              |         | TOLERANCE 容許公差        |  | PART NAME 品名  |  |
| DWG. 製圖               |         | SCALE 比例 參考           |  | 2.54mm FEMALE HEADER<br>SINGLE ROW H:5.0mm B1 TYPE<br>1XXP PLATING ROHS |  |
| DATE 制表日              | UNIT 單位 | SIZE 紙張尺寸             |  | PART NO.  |  |
| 2013/05/10            | M M     | A 4                   |  | 料號 C2824-XXATXHB0R  |  |
|                       | PAGE 張數 | REV. 版次               |  |   |  |
|                       | 1 / 1   | A                     |  |   |  |

1 2 3 4 5 6 7 8