

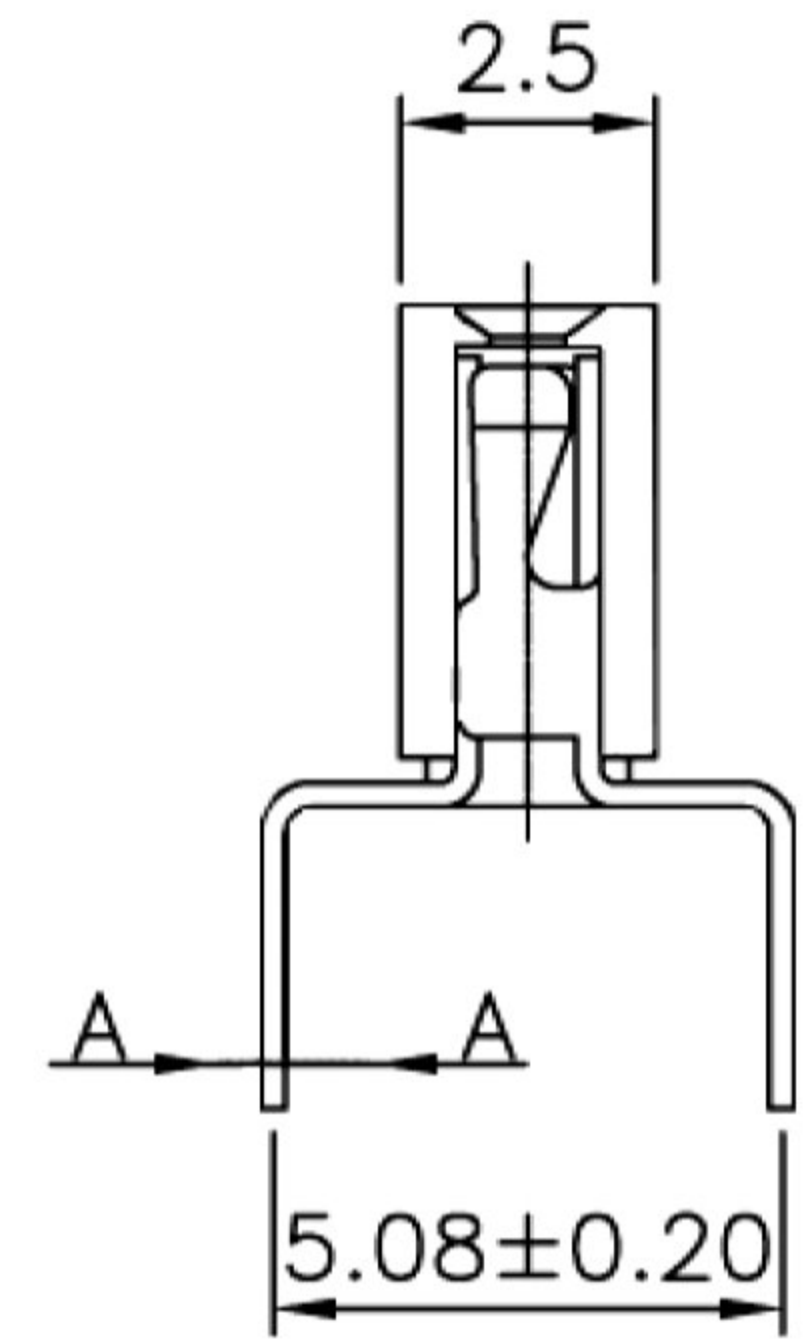
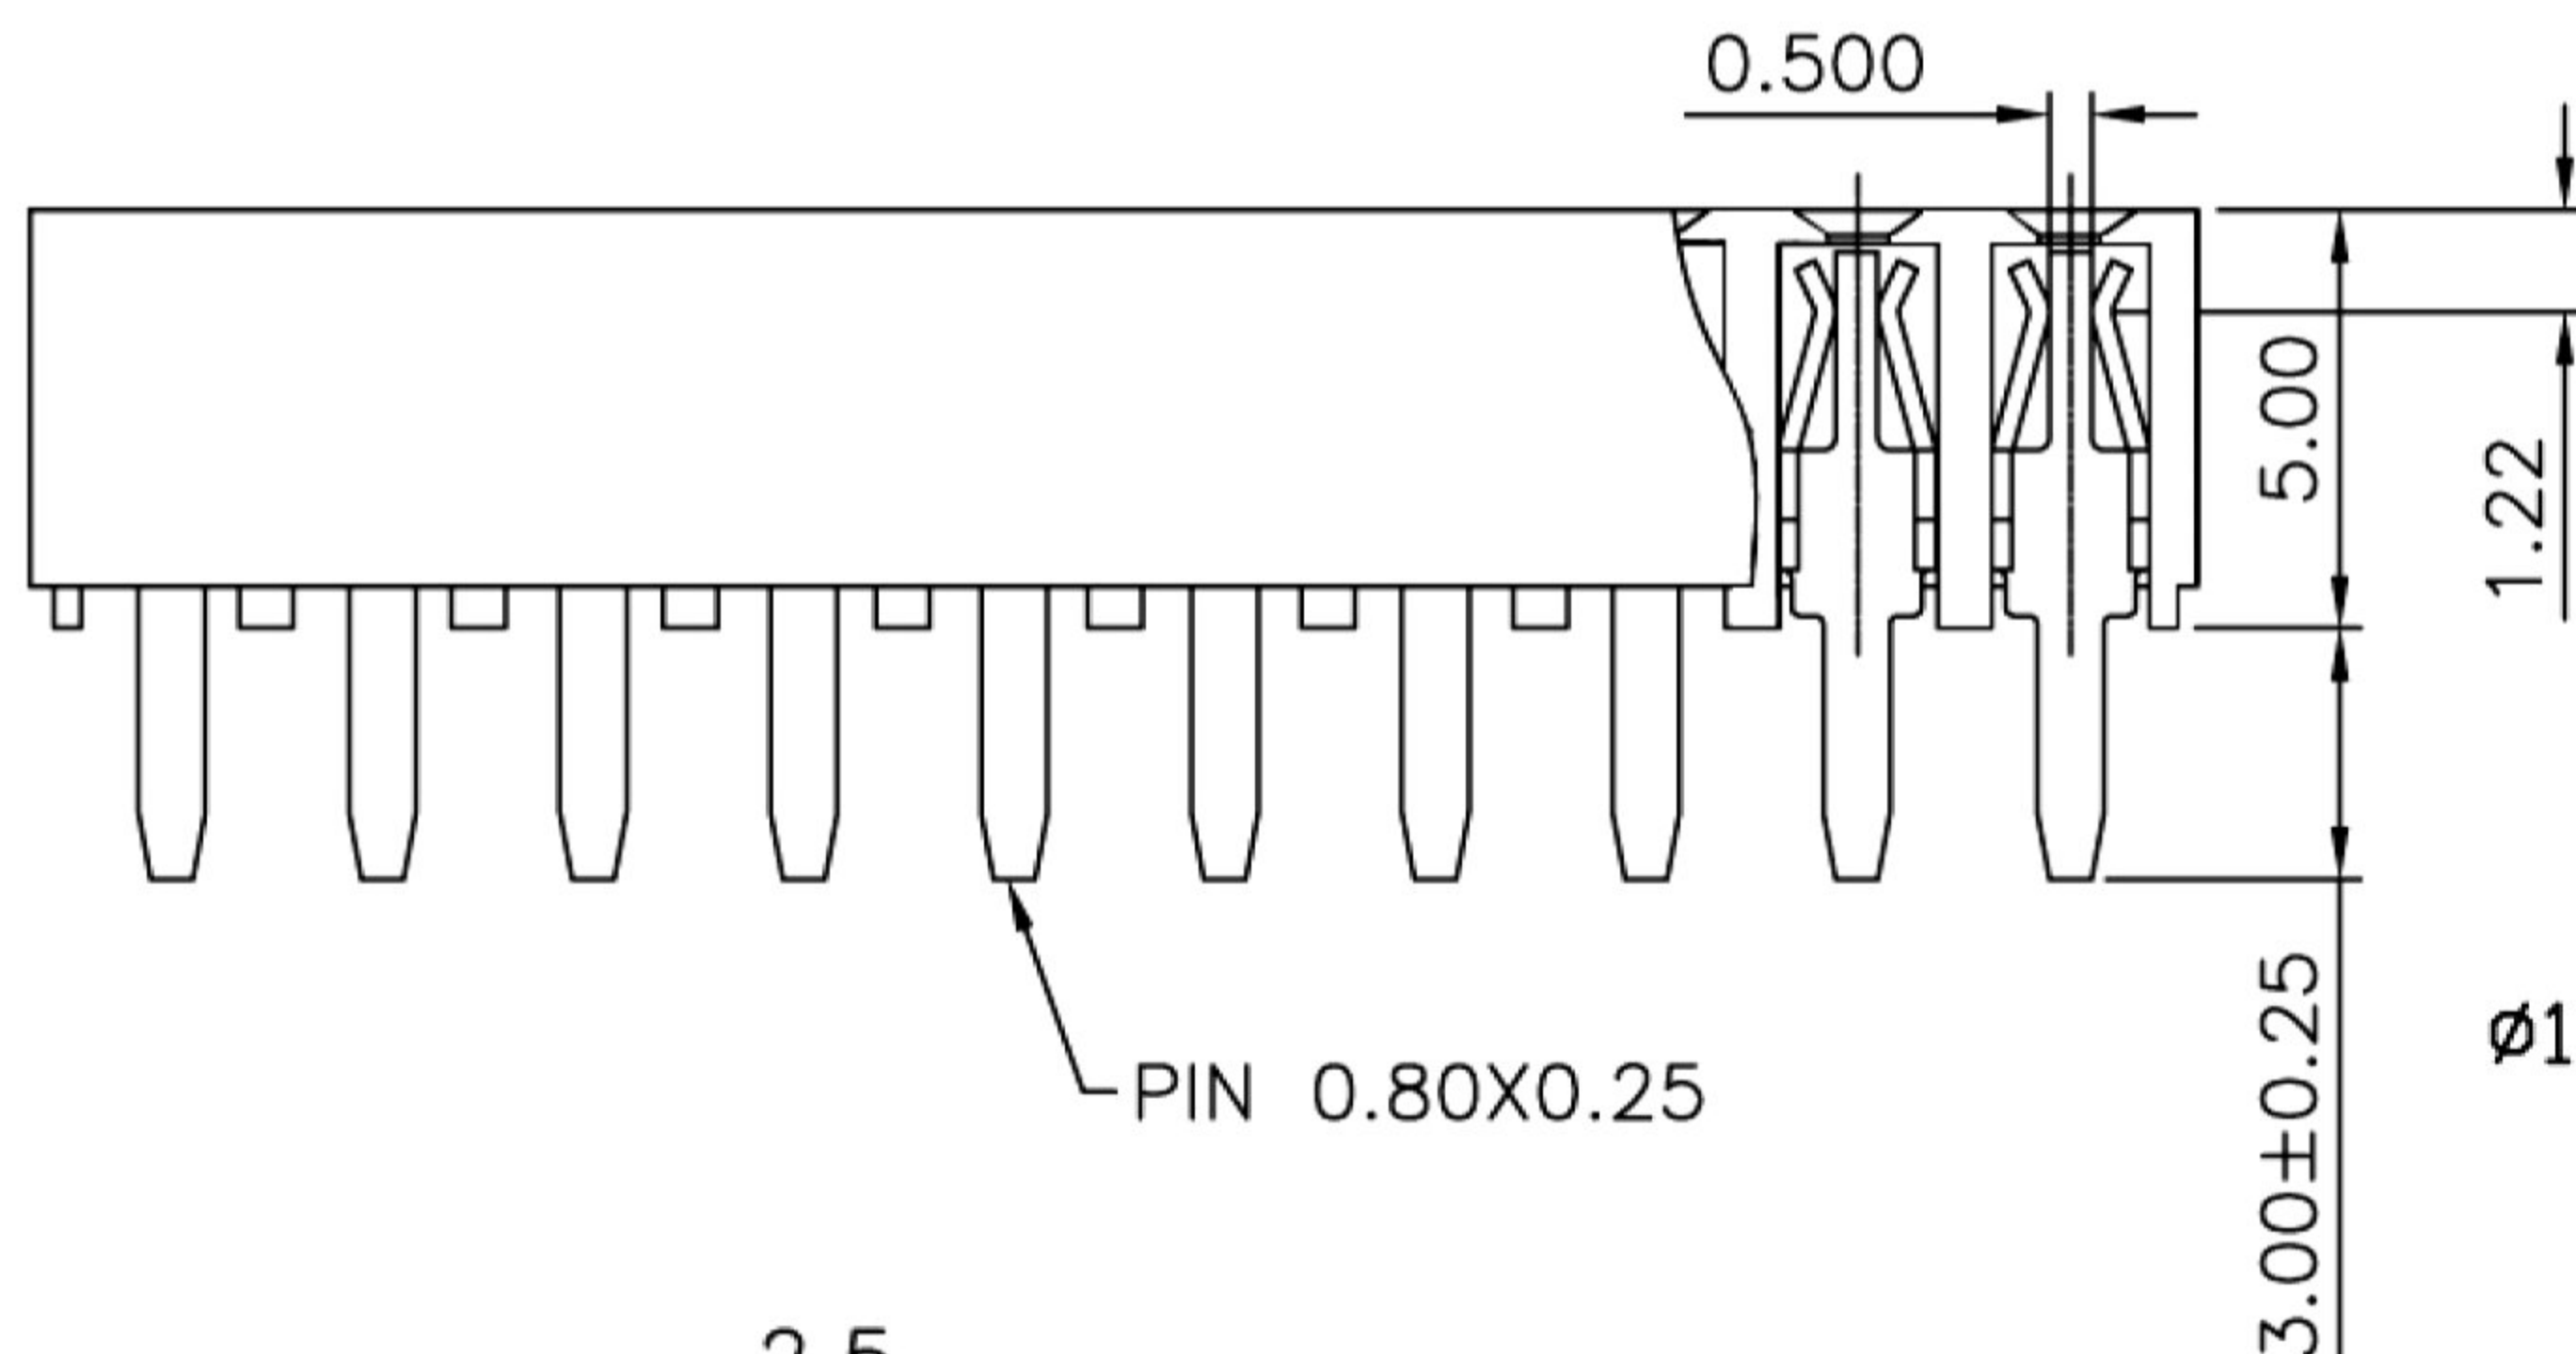


Cir-cuits	Dimension (mm)	
	L1	L2
3	5.08	8.12
4	7.62	10.66
5	10.16	13.20
6	12.70	15.74
7	15.24	18.28
8	17.78	20.82
9	20.32	23.36
10	22.86	25.90
11	25.40	28.44
12	27.94	30.98
13	30.48	33.52
14	33.02	36.06
15	35.56	38.60
16	38.10	41.14
17	40.64	43.68
18	43.18	46.22
19	45.72	48.76
20	48.26	51.30
21	50.80	53.84
22	53.34	56.38
23	55.88	58.92
24	58.42	61.46
25	60.96	64.00
26	63.50	66.54
27	66.04	69.08
28	68.58	71.62
29	71.12	74.16
30	73.66	76.70
31	76.20	79.24
32	78.74	81.78
33	81.28	84.32
34	83.82	86.86
35	86.36	89.40
36	88.90	91.94
37	91.44	94.48
38	93.98	97.02
39	96.52	99.56
40	99.06	102.10

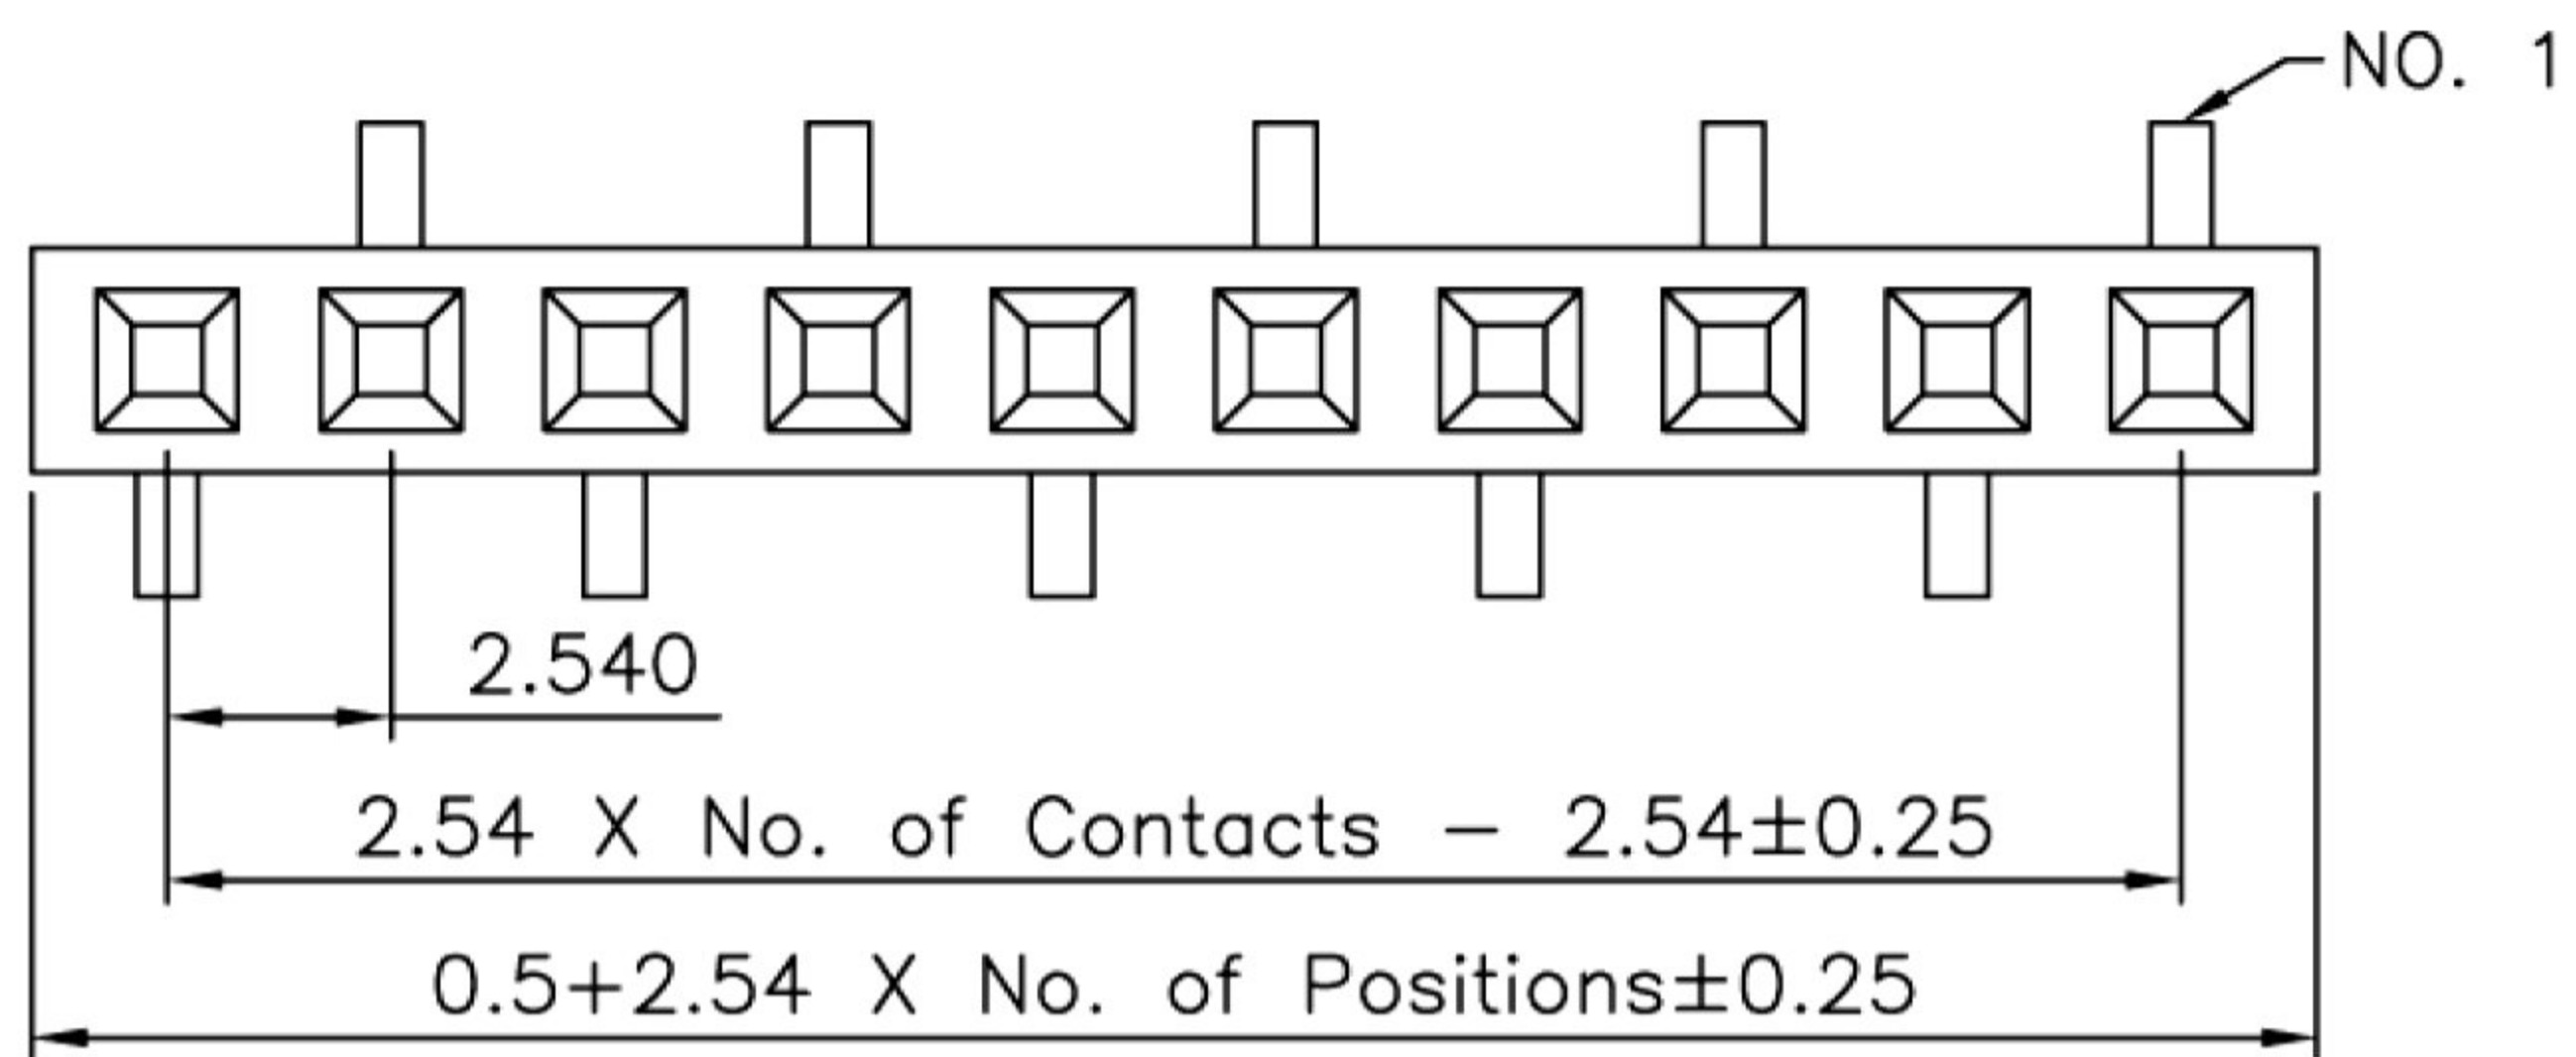

SPECIFICATIONS

Current Rating: 3 Amp
 Insulator Resistance: 5000 Megohms Min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C ~ +105°C
 Max. Processing Temp.: 230°C For 30~60 Seconds
 (260°C For 10 Seconds)
 Contact: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

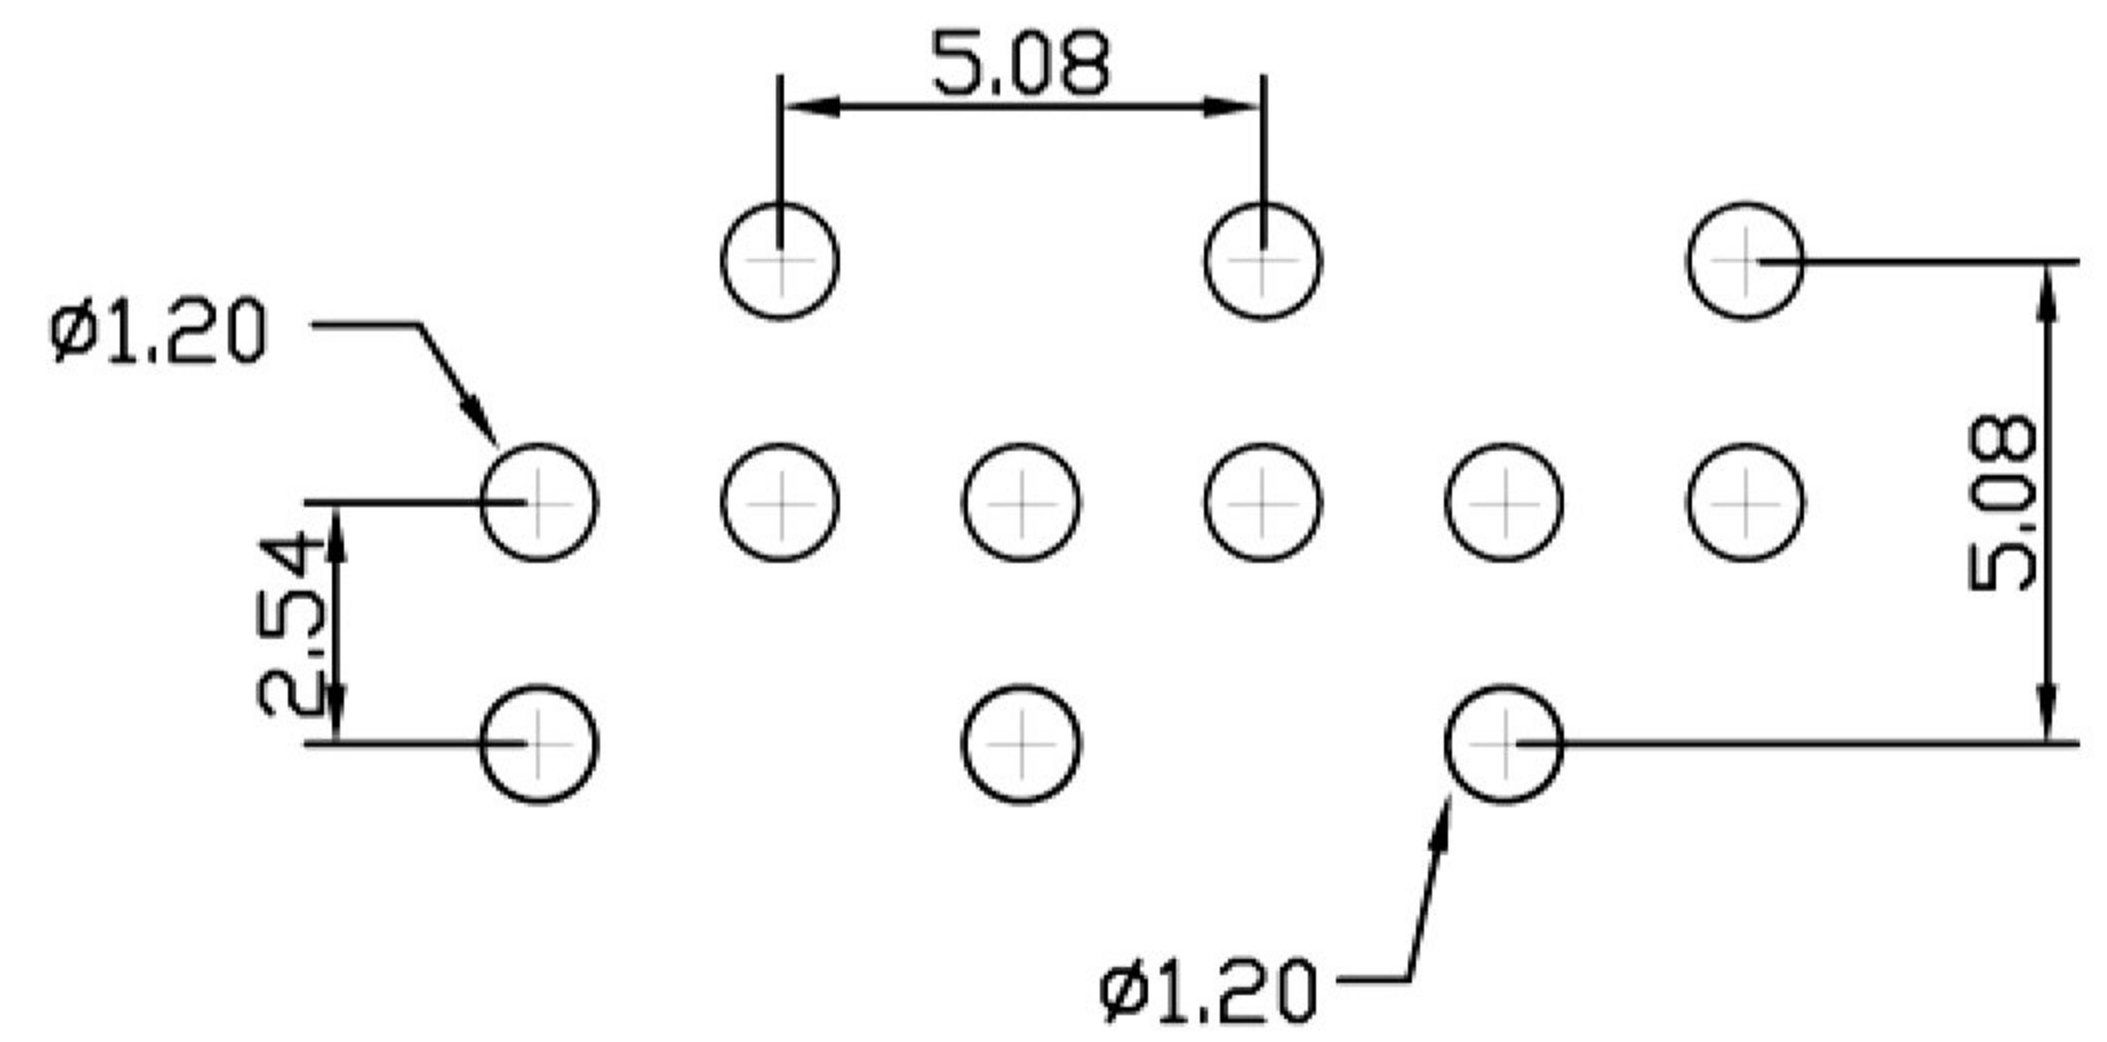

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 2.54mm FEMALE HEADER SINGLE ROW H:5.0mm B2 TYPE 1XXXP ROHS
DWG. 製圖 Betty	SCALE 比例 參考 UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C2824-XXATXHC0R
DATE 制表日 2012/07/18	PAGE 張數 1 OF 1	REV. 版次 A	