
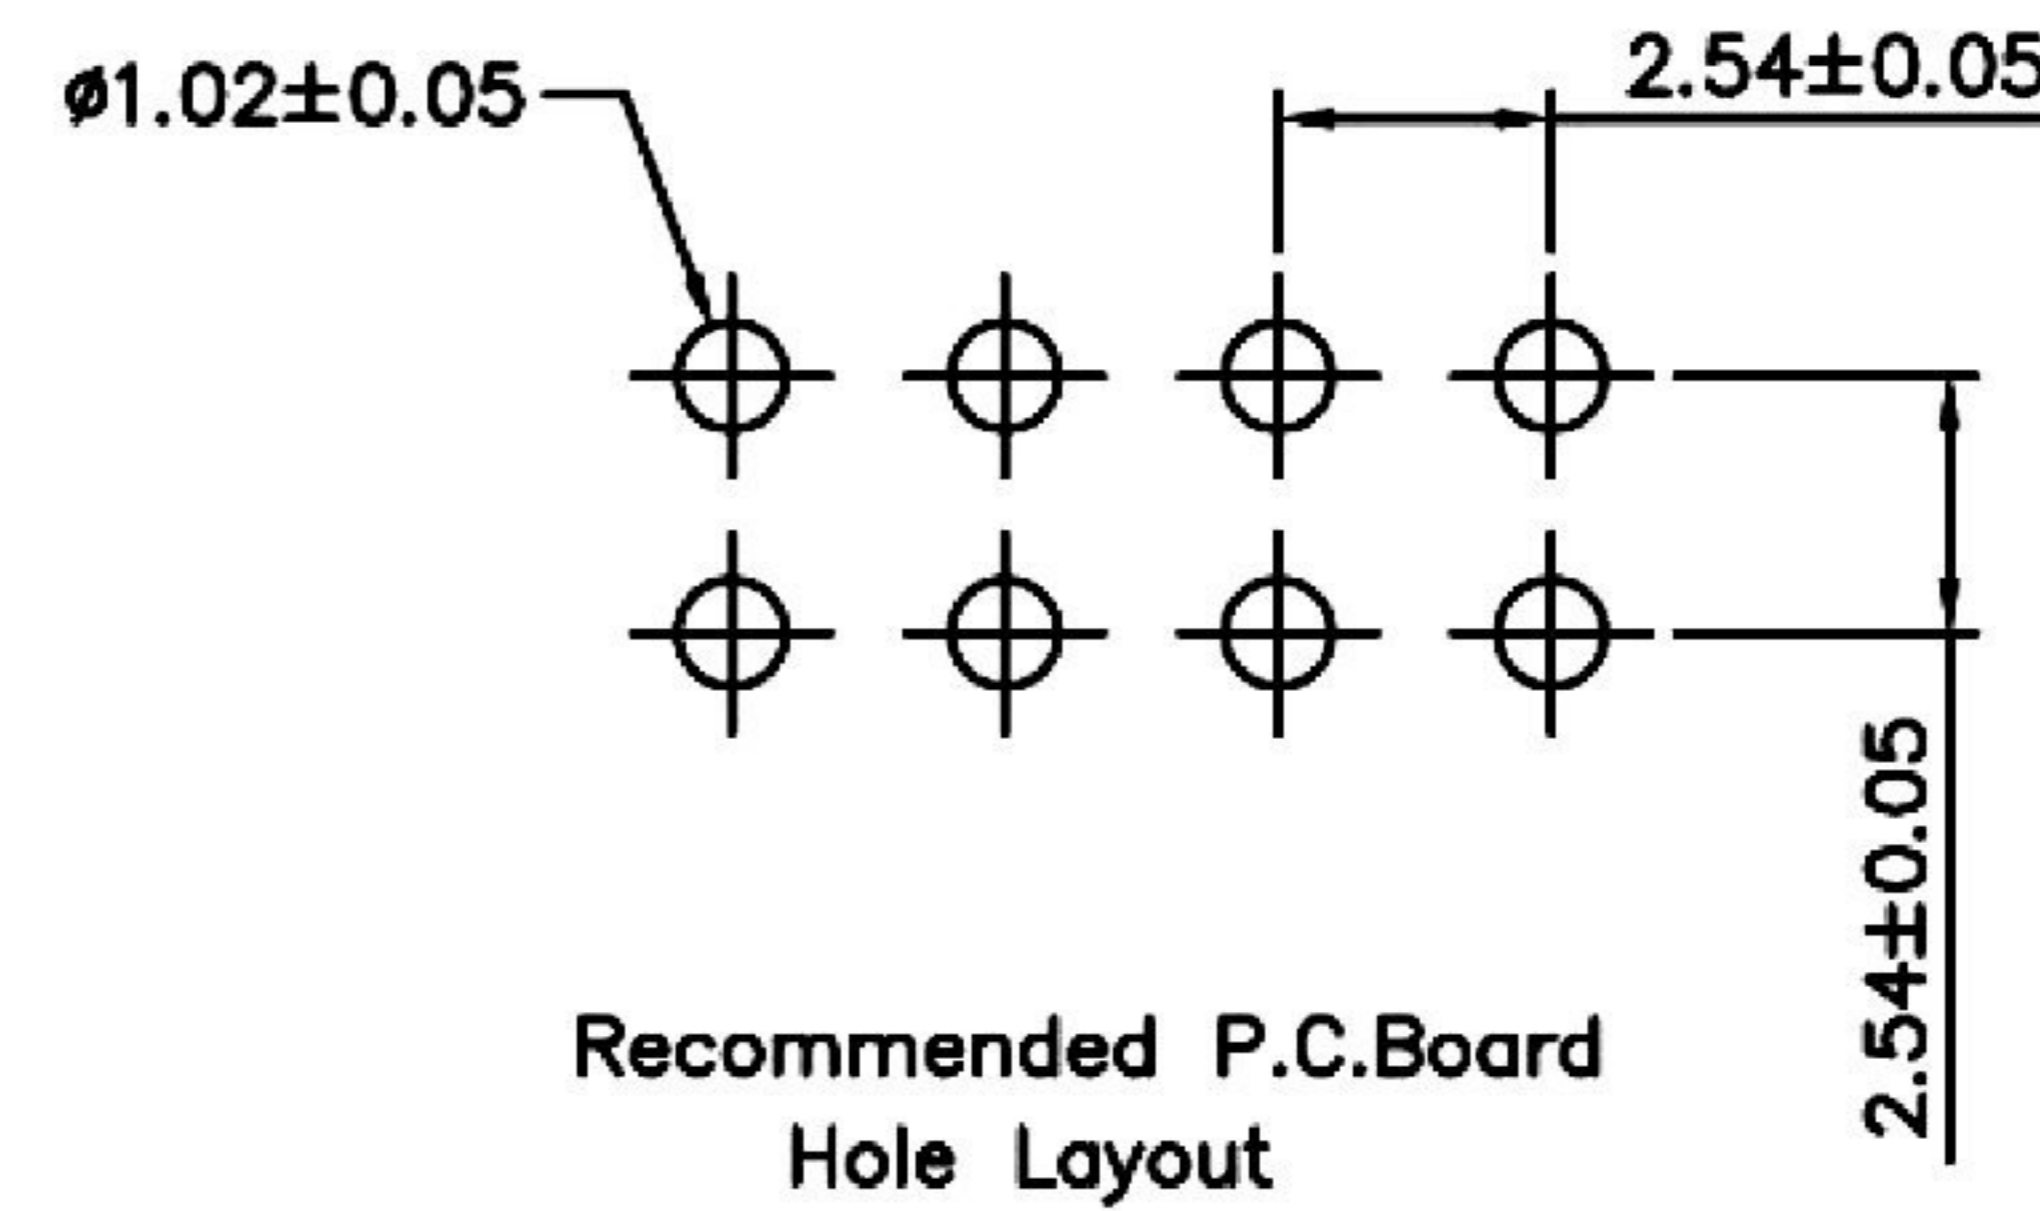
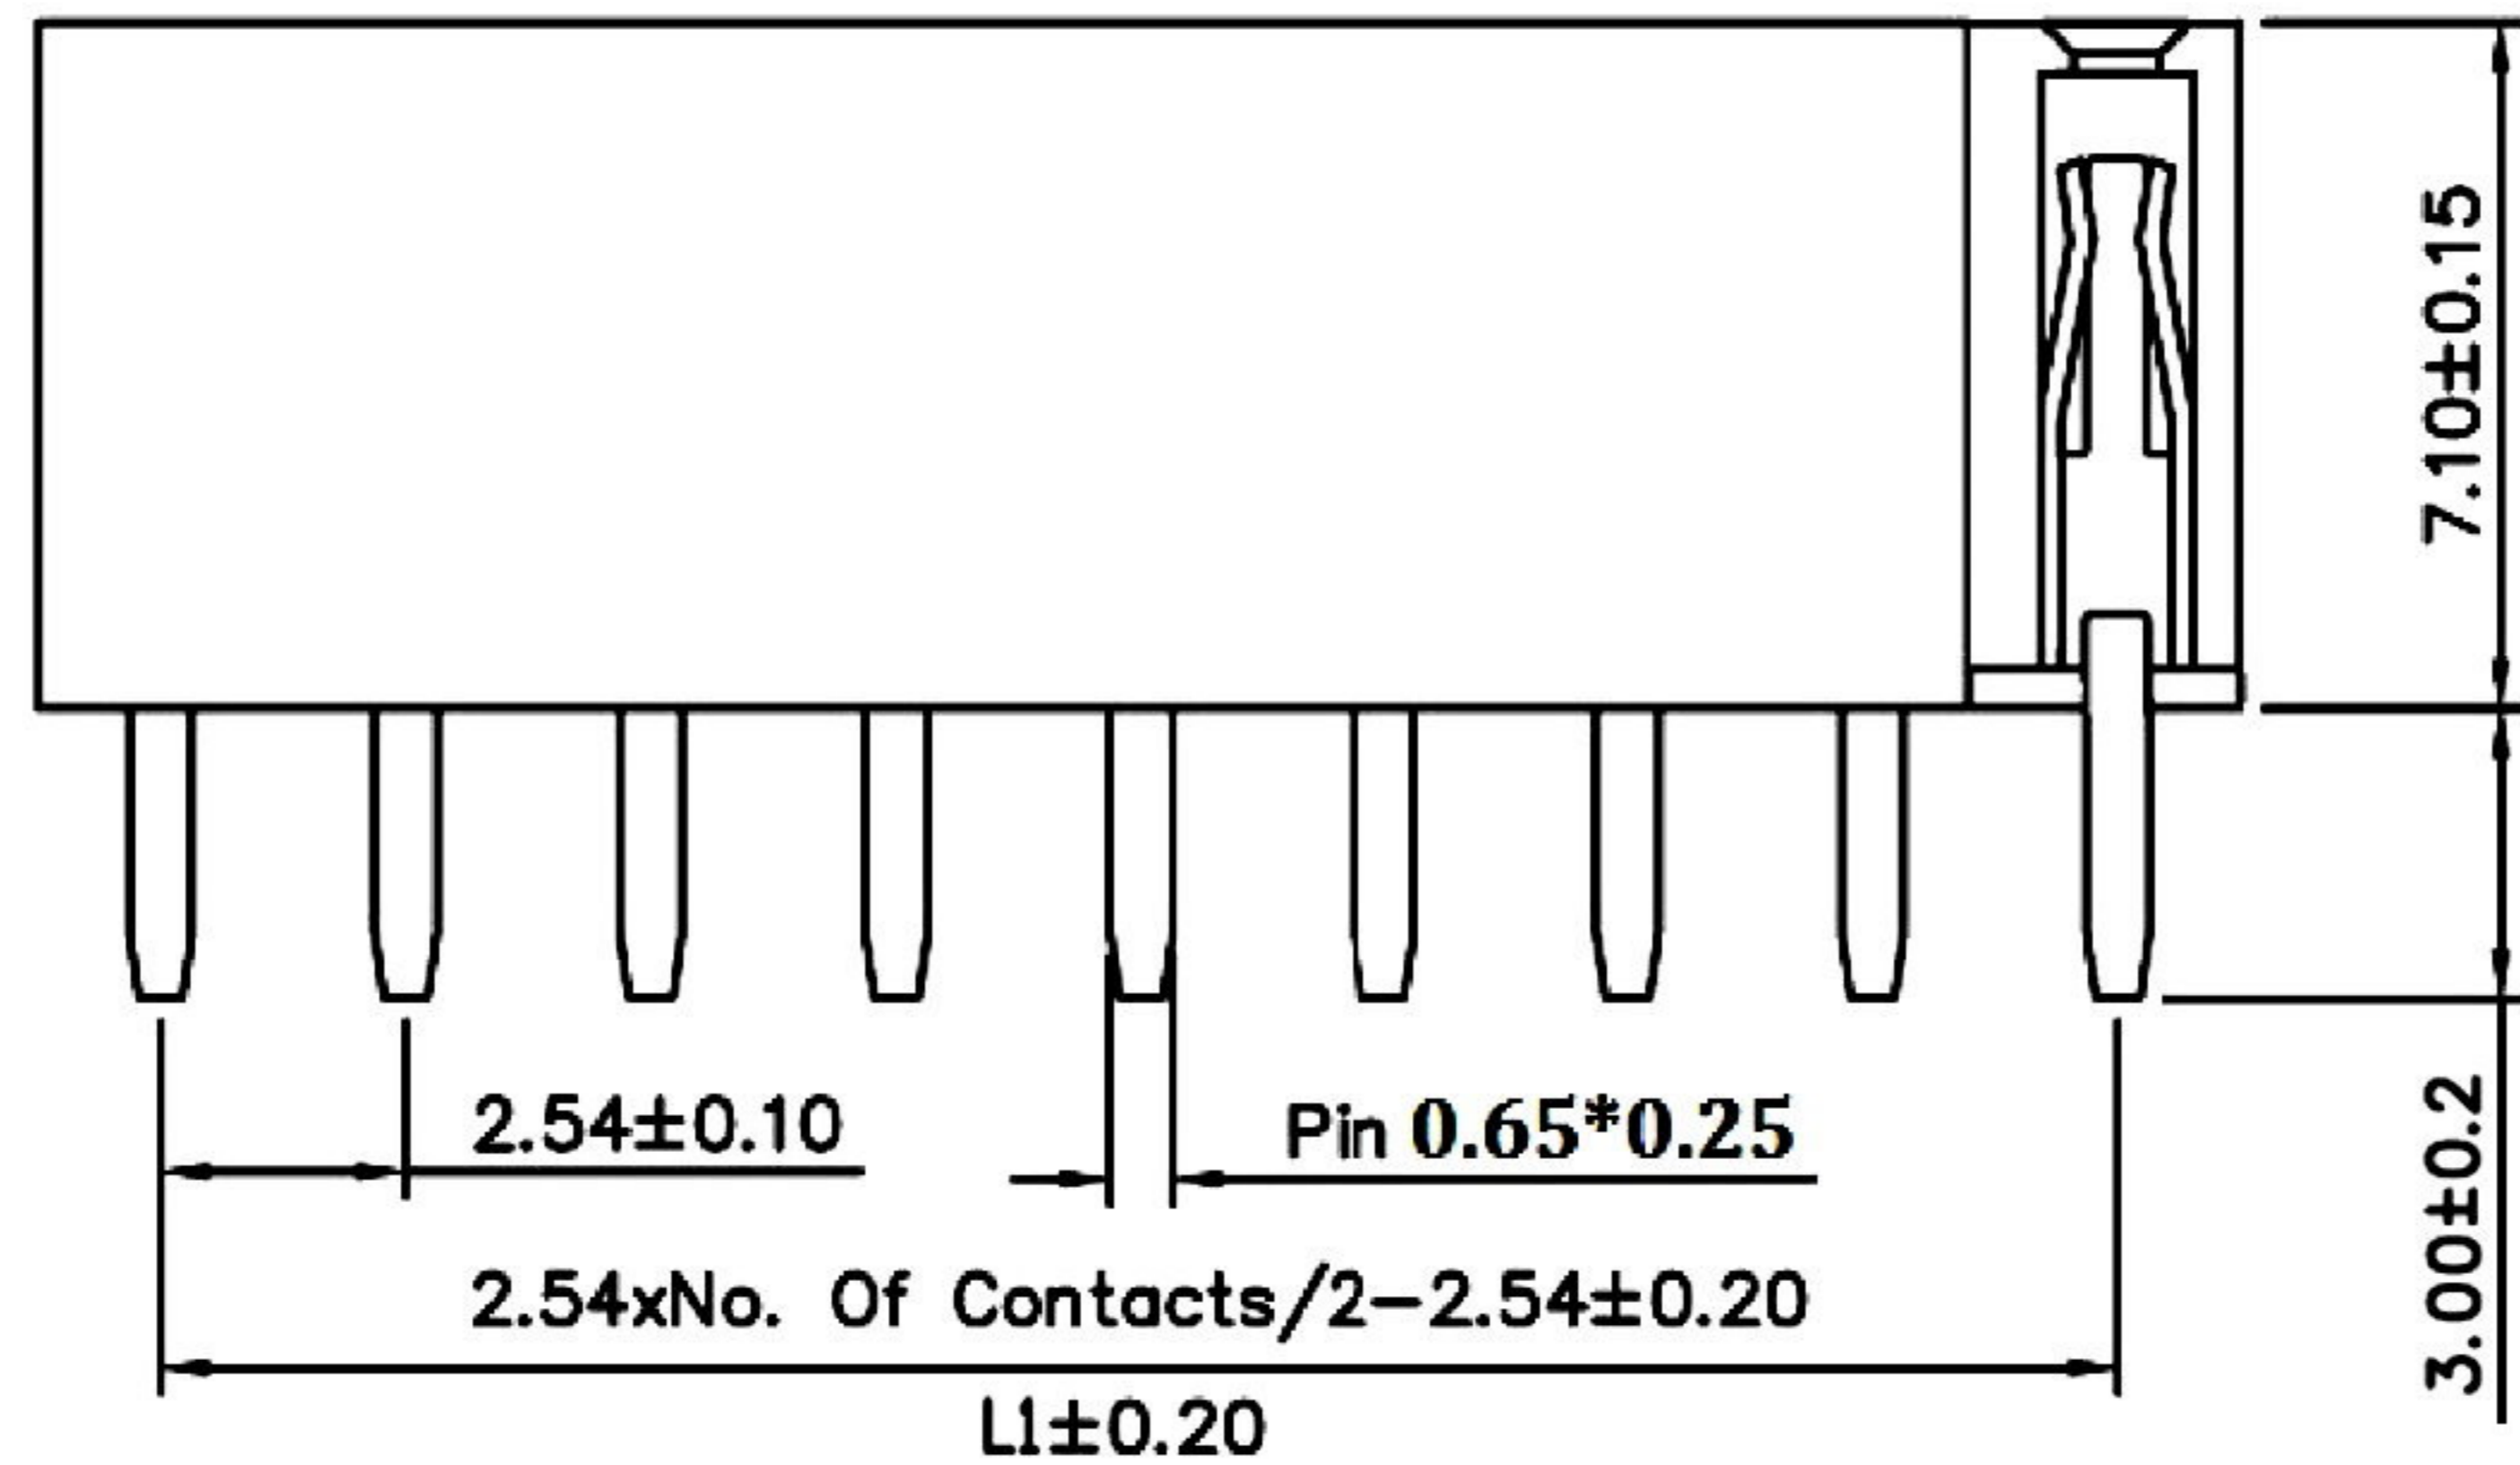


Cir- cuits	Dimension (mm)
	L1
2x 3	5.08
2x 4	7.62
2x 5	10.16
2x 6	12.70
2x 7	15.24
2x 8	17.78
2x 9	20.32
2x 10	22.86
2x 11	25.40
2x 12	27.94
2x 13	30.48
2x 14	33.02
2x 15	35.56
2x 16	38.10
2x 17	40.64
2x 18	43.18
2x 19	45.72
2x 20	48.26
2x 21	50.80
2x 22	53.34
2x 23	55.88
2x 24	58.42
2x 25	60.96
2x 26	63.50
2x 27	66.04
2x 28	68.58
2x 29	71.12
2x 30	73.66
2x 31	76.20
2x 32	78.74
2x 33	81.28
2x 34	83.82
2x 35	86.36
2x 36	88.90
2x 37	91.44
2x 38	93.98
2x 39	96.52
2x 40	99.06

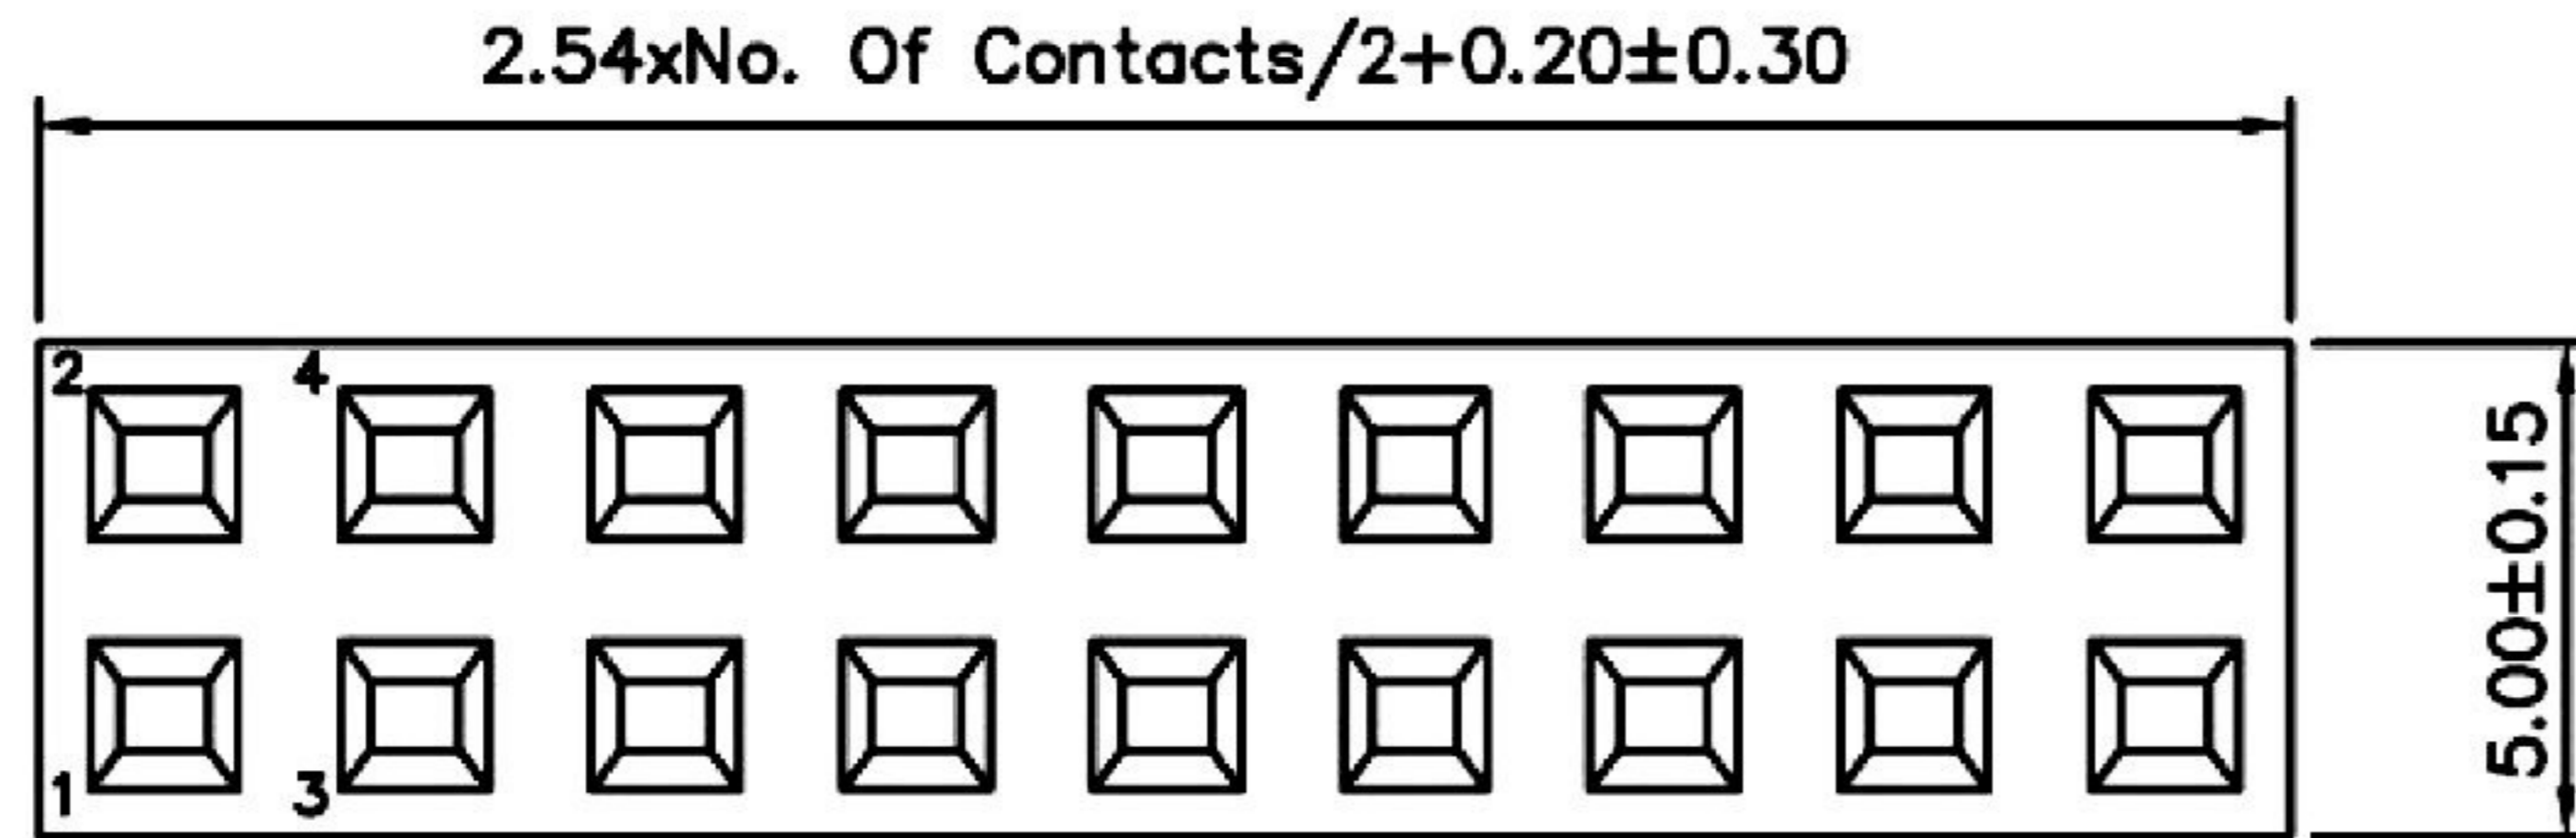

SPECIFICATIONS

Current Rating: 3 Amp
 Insulator Resistance: 5000 Megohms Min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C ~ +105°C
 Max. Processing Temp.: 230°C For 30~60 Seconds
 (260°C For 10 Seconds)
 Contact: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .X ±0.38 .XX ±0.25 .XXX ±0.12	PART NAME 品名 2.54mm FEMALE HEADER DUAL ROW H:7.1mm 2XXXP STRAIGHT TYPE ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C2826-XXBSXH00R
DATE 制表日 2020/12/21	PAGE 張數 1 OF 1	REV. 版次 B	