


Specifications
 Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T or the equivalent material

RECOMMENDED P.C.B LAYOUT
 FOR BOTTOM ENTRY
 (Tolerance:±0.05)

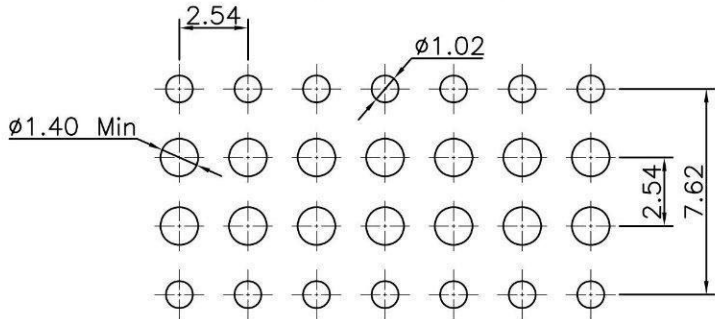

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE X:±5.0° X:±0.30 XX:±3.0° XX:±0.25 XXX:±2.0° XXX:±0.15 XXXX:±1.0° XXXX:±0.10	PART NAME 品名 2.54mm FEMALE HEADER DUAL ROW H:7.1mm (BENDING PIN) 2X??P FOOT SPACING:7.62mm FULL GOLD PLATING DIP LENGTH:3.0mm TUBE PACKING ROHS
DWG. 製圖 KAREN		UNIT 單位 MM	SIZE 紙張尺寸 A4
DATE 制表日 2015/05/26	PAGE 張數 1 OF 1	REV. 版本 C	PART NO. 料號 C2830-XXBSGHT0R