


SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Brass

Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

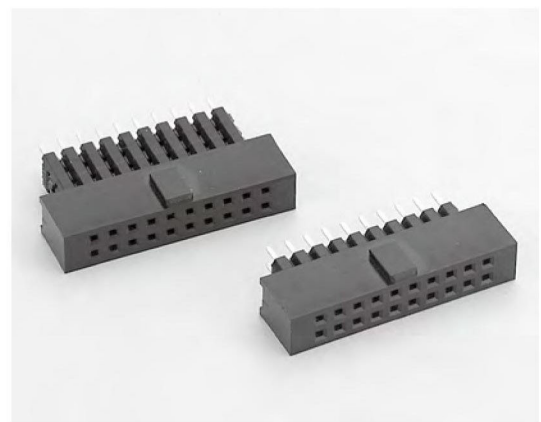

X	Y
10.94	3.10

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		
	APPD. 核准 HELEN		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±
DWG. 製圖 ABBY	SCALE 比例 參考	SIZE. 紙張尺寸 A 4	PART NAME 品名 2.54mm FEMALE HEADER DUAL ROW H:8.4mm 2XXXP STRAIGHT TYPE STACK 1 INSULATOR PIN LENGTH=3.1mm ROHS
DATE 制表日 2017/09/15	PAGE 張數 1 / 1	REV. 版次 A	PART NO. 料號 C2834-XXBSXHB0R