
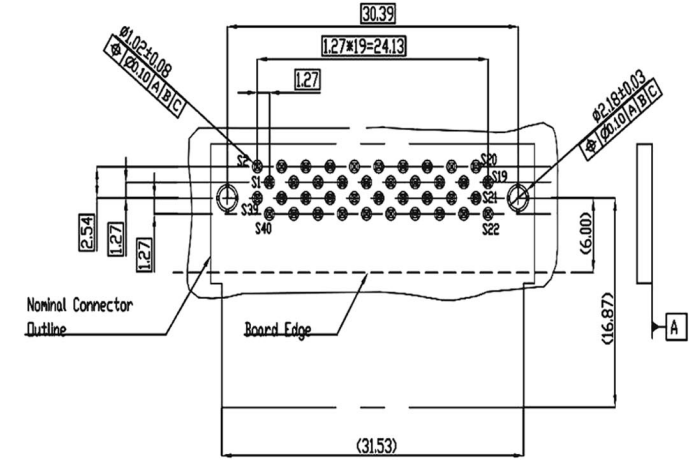


Material:
Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.
Electrical Characteristics:
Current Rating: Signal Pin: 0.5 AMP Per Pin.
Dielectric Withstanding Voltage:
Signal Pin DC 500V For 1 minute.
Contact Resistance: Signal Pin 30Ω max.
Operating Temperature: -55°C ~+105°C

RECOMMENDED MATING
BOARD FOOT PRINT



RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	Tolerances X= ± 0.5 .X= ± 0.25 .XX= ± 0.15	PART NAME 品名 1.27mm Signal Edge Card Connector 40Pin Right Angle Type With Locating Peg Contact Area: Au+Pd 30U" Plated .Dip Area: Tin Plated, Dip Pin Length: 3.25mm, Gap Width: 1.8mm Tray Packing RoHS
DWG. 製圖	UNIT 單位	SIZE. 紙張尺寸	PART NO.
DATE 制表日 2015/07/26	M M	A 4	料號 C2940-40RYXAA0R
Betty	PAGE 張數	REV. 版次	
	1 OF 1	A	