

MATERIALS:

INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0

CONTACT MATERIAL:BRASS,GOLD FLASH OVER NICKEL

NSR: P.C. FIBER,UL94V-0

ELECTRICAL:

CURRENT RATING:1AMP DC






INSULATION RESISTANCE:3000MΩ MIN.

CONTACT RESISTANCE:30mΩ MAX.

DIELECTRIC WITHSTANDING:500V AC

OPERATING TEMPERATURE:-40°C~+105°C

TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.

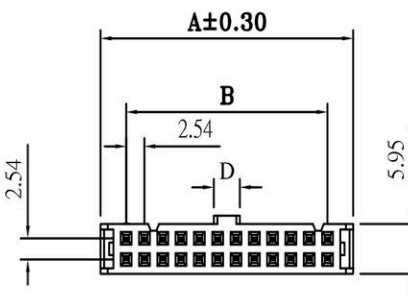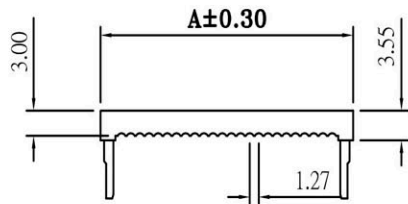

DIMENSION				
CONTACT	A	B	D	E
10P	17.26	10.16	3.60	13.70
14P	22.34	15.24	3.60	18.78
16P	24.88	17.78	3.60	21.30
20P	29.96	22.86	3.60	26.38
24P	35.04	27.94	3.60	31.46
26P	37.58	30.48	3.60	34.00
30P	42.66	35.56	3.60	39.08
34P	47.74	40.64	3.60	44.48
40P	55.36	48.26	3.60	52.10


RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 Betty

DWG.
製圖 Lena

DATE 制表日
2023/5/29



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差

0 ± 0.30

.00 ± 0.20

.000 ± 0.10

SIZE.
紙張尺寸 A 4

REV.
版本 B

PART NAME 品名

IDC SOCKET 2.54mm X 2.54mm XXP
WITH S/R (NSR) WITH BUMP SELECTIVE
GOLD PLATING BLACK INSULATOR ROHS

PART NO.

料號 C3001-XXBYSB00R