



1. Material
Insulator: PBT glass reinforced, rated UL94V-0; Black
Contact: Phosphor Bronze
2. Matching requirements
Wire: Flat ribbon cable pitch 0.635mm 30AWG
Insertion Depth: 2.60mm to 3.10mm
Lead Size Accepted: 0.40mm square
3. Electrical
Current Rating: 1 Amp
Voltage Rating: 250V AC
Contact Resistance: 30m ohm Max.
Insulator Resistance: 1000M ohm min.
Dielectric Withstanding Voltage: 250V AC for 1minute
Operating Temp Range: -40° ~+105° C
4. RoHS Compliant

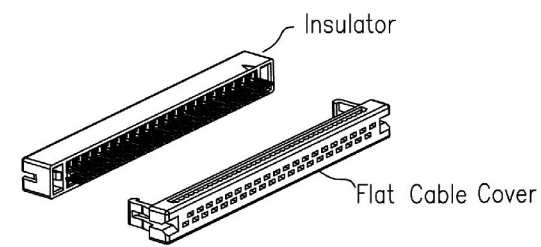

C 3005 — XX NNGB00R

1. PRODUCTS:	5. BUMP OPTION:	7. INSULATOR COLOR:	8. FILL IT WITH "0"
C: Connector	Y: W/ Bump	B: Black	9. FILL IT WITH "0"
2. SERIES NO.:	N: W/O Bump		10. R: ROHS
3005	6. CONTACT PLATING:		
3. CONTACT NO.:	G: Gold Flash		
10-80			
4. FUNCTION:			
N: W/O Strain Relief			

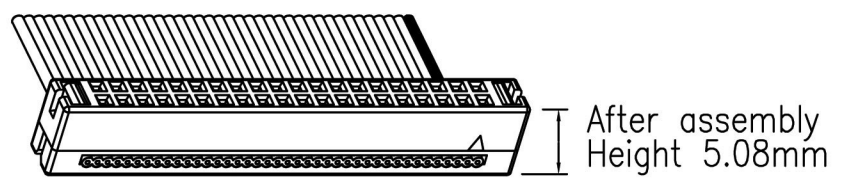

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 DWG. 製圖 DATE 制表日 2015/02/02	SCALE 比例 UNIT 單位 M M PAGE 張數 1 / 1