


- Material
Insulator: PBT glass reinforced, rated UL94V-0; Black
Contact: Phosphor Bronze
- Matching requirements
Wire: Flat ribbon cable pitch 0.635mm 30AWG
Insertion Depth: 2.60mm to 3.10mm
Lead Size Accepted: 0.40mm square
- Electrical
Current Rating: 1 Amp
Voltage Rating: 250V AC
Contact Resistance: 30m ohm Max.
Insulator Resistance: 1000M ohm min.
Dielectric Withstanding Voltage: 250V AC for 1minute
Operating Temp Range: $-40^{\circ} \sim +105^{\circ} \text{C}$
- RoHS Compliant

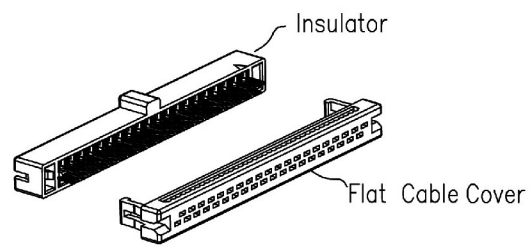

C 3005 — 10 NYGB00R

- | | | | |
|-----------------------------|--|--------------------------------|---------------------|
| 1. PRODUCTS:
C:Connector | 5. BUMP OPTION:
Y:W/ Bump
N:W/O Bump | 7. INSULATOR COLOR:
B:Black | 8. FILL IT WITH "0" |
| 2. SERIES NO.:
3005 | 6. CONTACT PLATING:
G:Gold Flash | | 9. FILL IT WITH "0" |
| 3. CONTACT NO.:
10-80 | 4. FUNCTION:
N:W/O Strain Relief | | 10. R:ROHS |

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	PART NAME 品名 IDC SOCKET 1.27mm X 1.27mm XXP WITHOUT S/R W/BUMP GOLD PLATING BLACK INSULATOR ROHS	
APPD. 核准 DWG. 製圖 DATE 制表日 2015/02/02	SCALE 比例 UNIT 單位 M M PAGE 張數 1 / 1	PART NO. 料號 C3005-XXNYGB00R