


After Assembly (H:5.0mm)

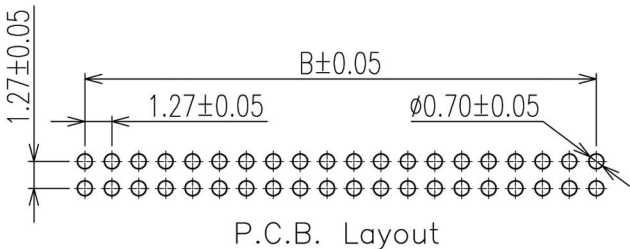

P.C.B. Layout

Specifications:
 Current Rating:0.5 Amp
 Contact resistance:30m Ohm Max.
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:250V AC/1 Minute
 Flat ribbon cable with 0.635mm pitch.
 Operating Temperature Range:-40°~+105°C
 Material And Finish
 Insulator:PBT&Glass-fiber reinforced UL94V-0
 Insulator Color:Black
 Contact:Phosphor Bronze or Brass
 Contact Plating:See Contact Plating Tab.
 Note:(*)Marked is Important DIM For QC.

C	3006	—	06	A	B	T	B	0	0	R
1	2		3	4	5	6	7	8	9	10

- | | | | |
|---|--|--------------------------------|---------------------|
| 1. PRODUCTS:
C:Connector | 5. MATERIAL:
B:Brass | 7. INSULATOR COLOR:
B:Black | 9. FILL IT WITH "0" |
| 2. SERIES NO.:
3006 | 6. CONTACT PLATING:
T:Tin | 8. DIP LENGTH:
0.19mm | 10. R:ROHS |
| 3. CONTACT NO.:
06, 08, 10, 12, 14
16, 20, 22, 26, 30
34, 40, 44, 50, 60
68, 80 | 4. BODY OPTION:
A:5.0mm
(After Assembly) | | |

No. of Positions:

No.	A	B	No.	A	B	No.	A	B
06	8.01	2.54	20	16.90	11.43	44	32.14	26.67
08	9.28	3.81	22	18.17	12.70	50	35.95	30.48
10	10.55	5.08	26	20.71	15.24	60	42.30	36.83
12	11.82	6.35	30	23.25	17.78	68	47.38	41.91
14	13.09	7.62	34	25.79	20.32	80	55.00	49.53
16	14.36	8.89	40	29.60	24.13			

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例 參考	TOLERANCE GENERAL ANGLE .X ± 0.35 X' ± 5.0° .XX ± 0.25 X' ± 3.0° .XXX ± 0.10 .XXX ± 2.0°	PART NAME 品名 DIP PLUG 1.27mm X 1.27mm XXP AFTER ASSEMBLY H:5.0mm MATERIAL : BRASS TIN PLATING BLACK INSULATOR ROHS
DWG. 製圖 Hedy			
DATE 制表日 2017/09/22	PAGE 張數 1 / 1	REV. 版次 A	PART NO. 料號 C3006-XXABTB00R