





Specifications

1. (MATERIAL)

Housing: LCP+30%G. F UL94V-0, Color: Black
 Contact: Brass, 0.8u" MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. (characteristics):

Current Rating: 1 AMP.
 Contact Resistance: 20 mΩ MAX.
 Insulating Resistance: 1000 MΩ MIN.
 Withstanding Voltage: AC 500V.
 Temperature Range: -40° C to +105° C

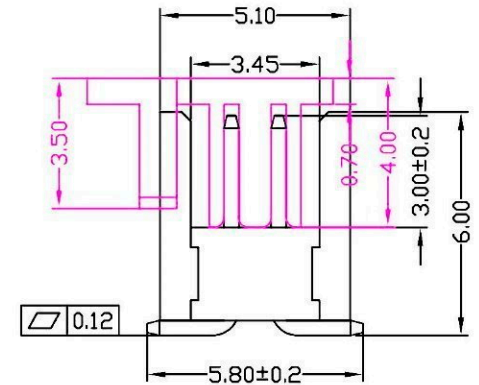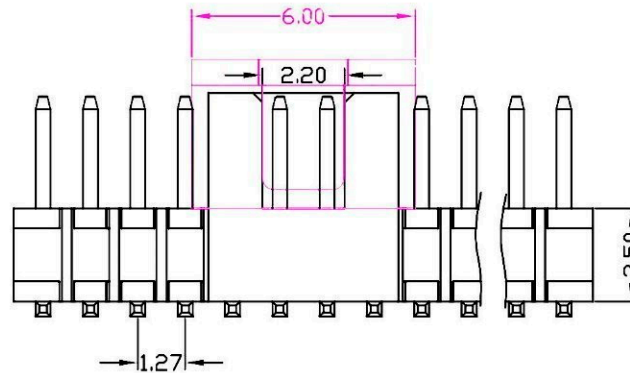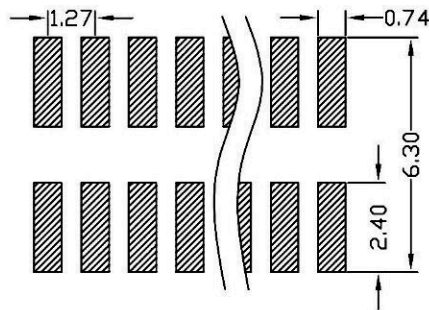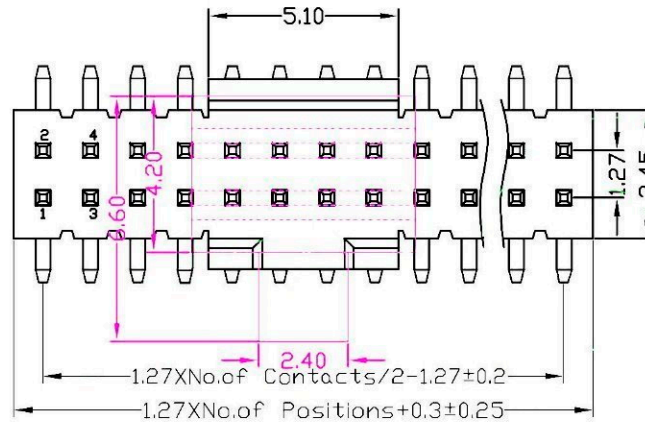

| | | | | | | | | | |
|---|------|----|---|---|---|---|---|---|----|
| C | 3513 | XX | D | G | N | B | Q | N | R |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |

| | | | |
|---|--------------------------------------|--|--|
| 1. PRODUCTS: C: Connector | 4. CONTACT TYPE: D: S.M.T | 6. INSULATOR MATERIAL: N: LCP | 9. BODY OPTION: N: W/O Locating Peg |
| 2. SERIES NO.: 3513 | 7. INSULATOR COLOR: B: Black | (SMT Only) | |
| 3. CONTACT NO.: 10(2x5), 16(2x8), 20(2x10), 26(2x13), 30(2x15), 40(2x20), 50(2x25), 14(2x7) | 5. CONTACT PLATING: G: Gold Flash | 8. PACKING STYLE: Q: PAD+Reel Packing | 10. R: ROHS |

| | | | |
|------------------------|-------------------|---|--|
| RoHS Compliant | | HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. | |
| APPD. 核准 HELEN | SCALE 比例 参考 | TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 5° | PART NAME 品名 1.27mm X 1.27mm SHROUDED STACKER 2XXXPIN SMT TYPE GOLD FLASH PLATING MATERIAL: LCP UL94V-0 WITHOUT LOCATING PEG BLACK COLOR PAD+REEL PACKING ROHS |
| DWG. 製圖 ABBY | UNIT 單位 MM | SIZE. 紙張尺寸 A4 | PART NO. 料號 C3513-XXDGNBQNR |
| DATE 制表日 2022/10/28 | PAGE 張數 1 OF 1 | REV. 版本 A | |