

# Specifications

(Remark)

## 1. (MATERIAL)

Housing: LCP+30%G. F UL94V-0, Color: Black

Contact: Brass, 0.8u" MIN GOLD PLATING OVER ALL.  
30u" MIN NICKEL UNDERPLATING OVER ALL.

## 2. (characteristics):





Current Rating: 1 AMP.

Contact Resistance: 20 mΩ MAX.

Insulating Resistance: 1000 MΩ MIN.

Withstanding Voltage: AC 500V.

Temperature Range: -40° C to +105° C

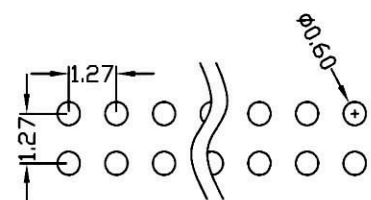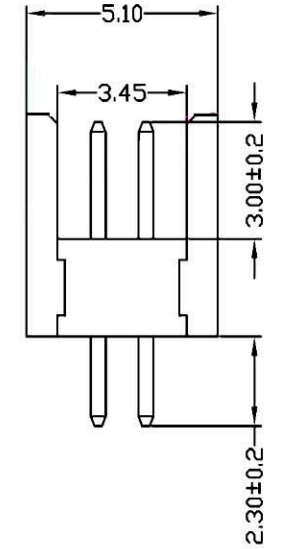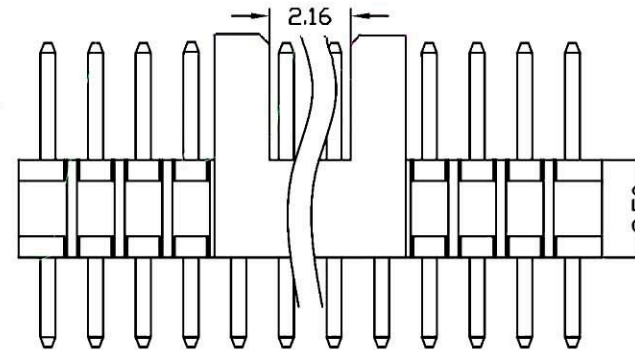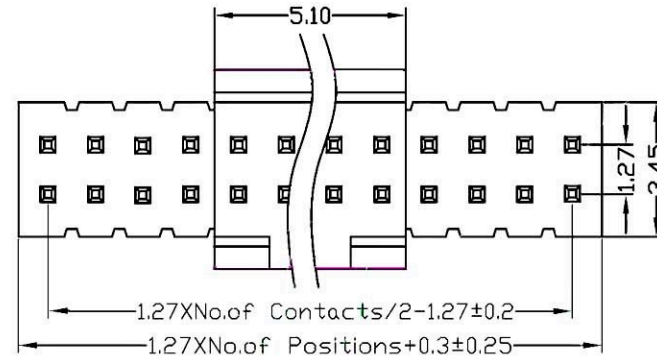

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖 Helen	UNIT 單位	SIZE 紙張尺寸	1.27 X 1.27mm Shrouded Stacker 2X??Pin Straight Flash Plating
DATE 制表日 2020/9/11	PAGE 張數 1 OF 1	REV. 版本 A	MATERIAL 料號 C3513-XXSGNBXNR