



Current Rating and Voltage: 3 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: High Temperature
 Plastic,UL 94V-0 (Nylon-6T)
 Finish: Standard: Gold Flash all over

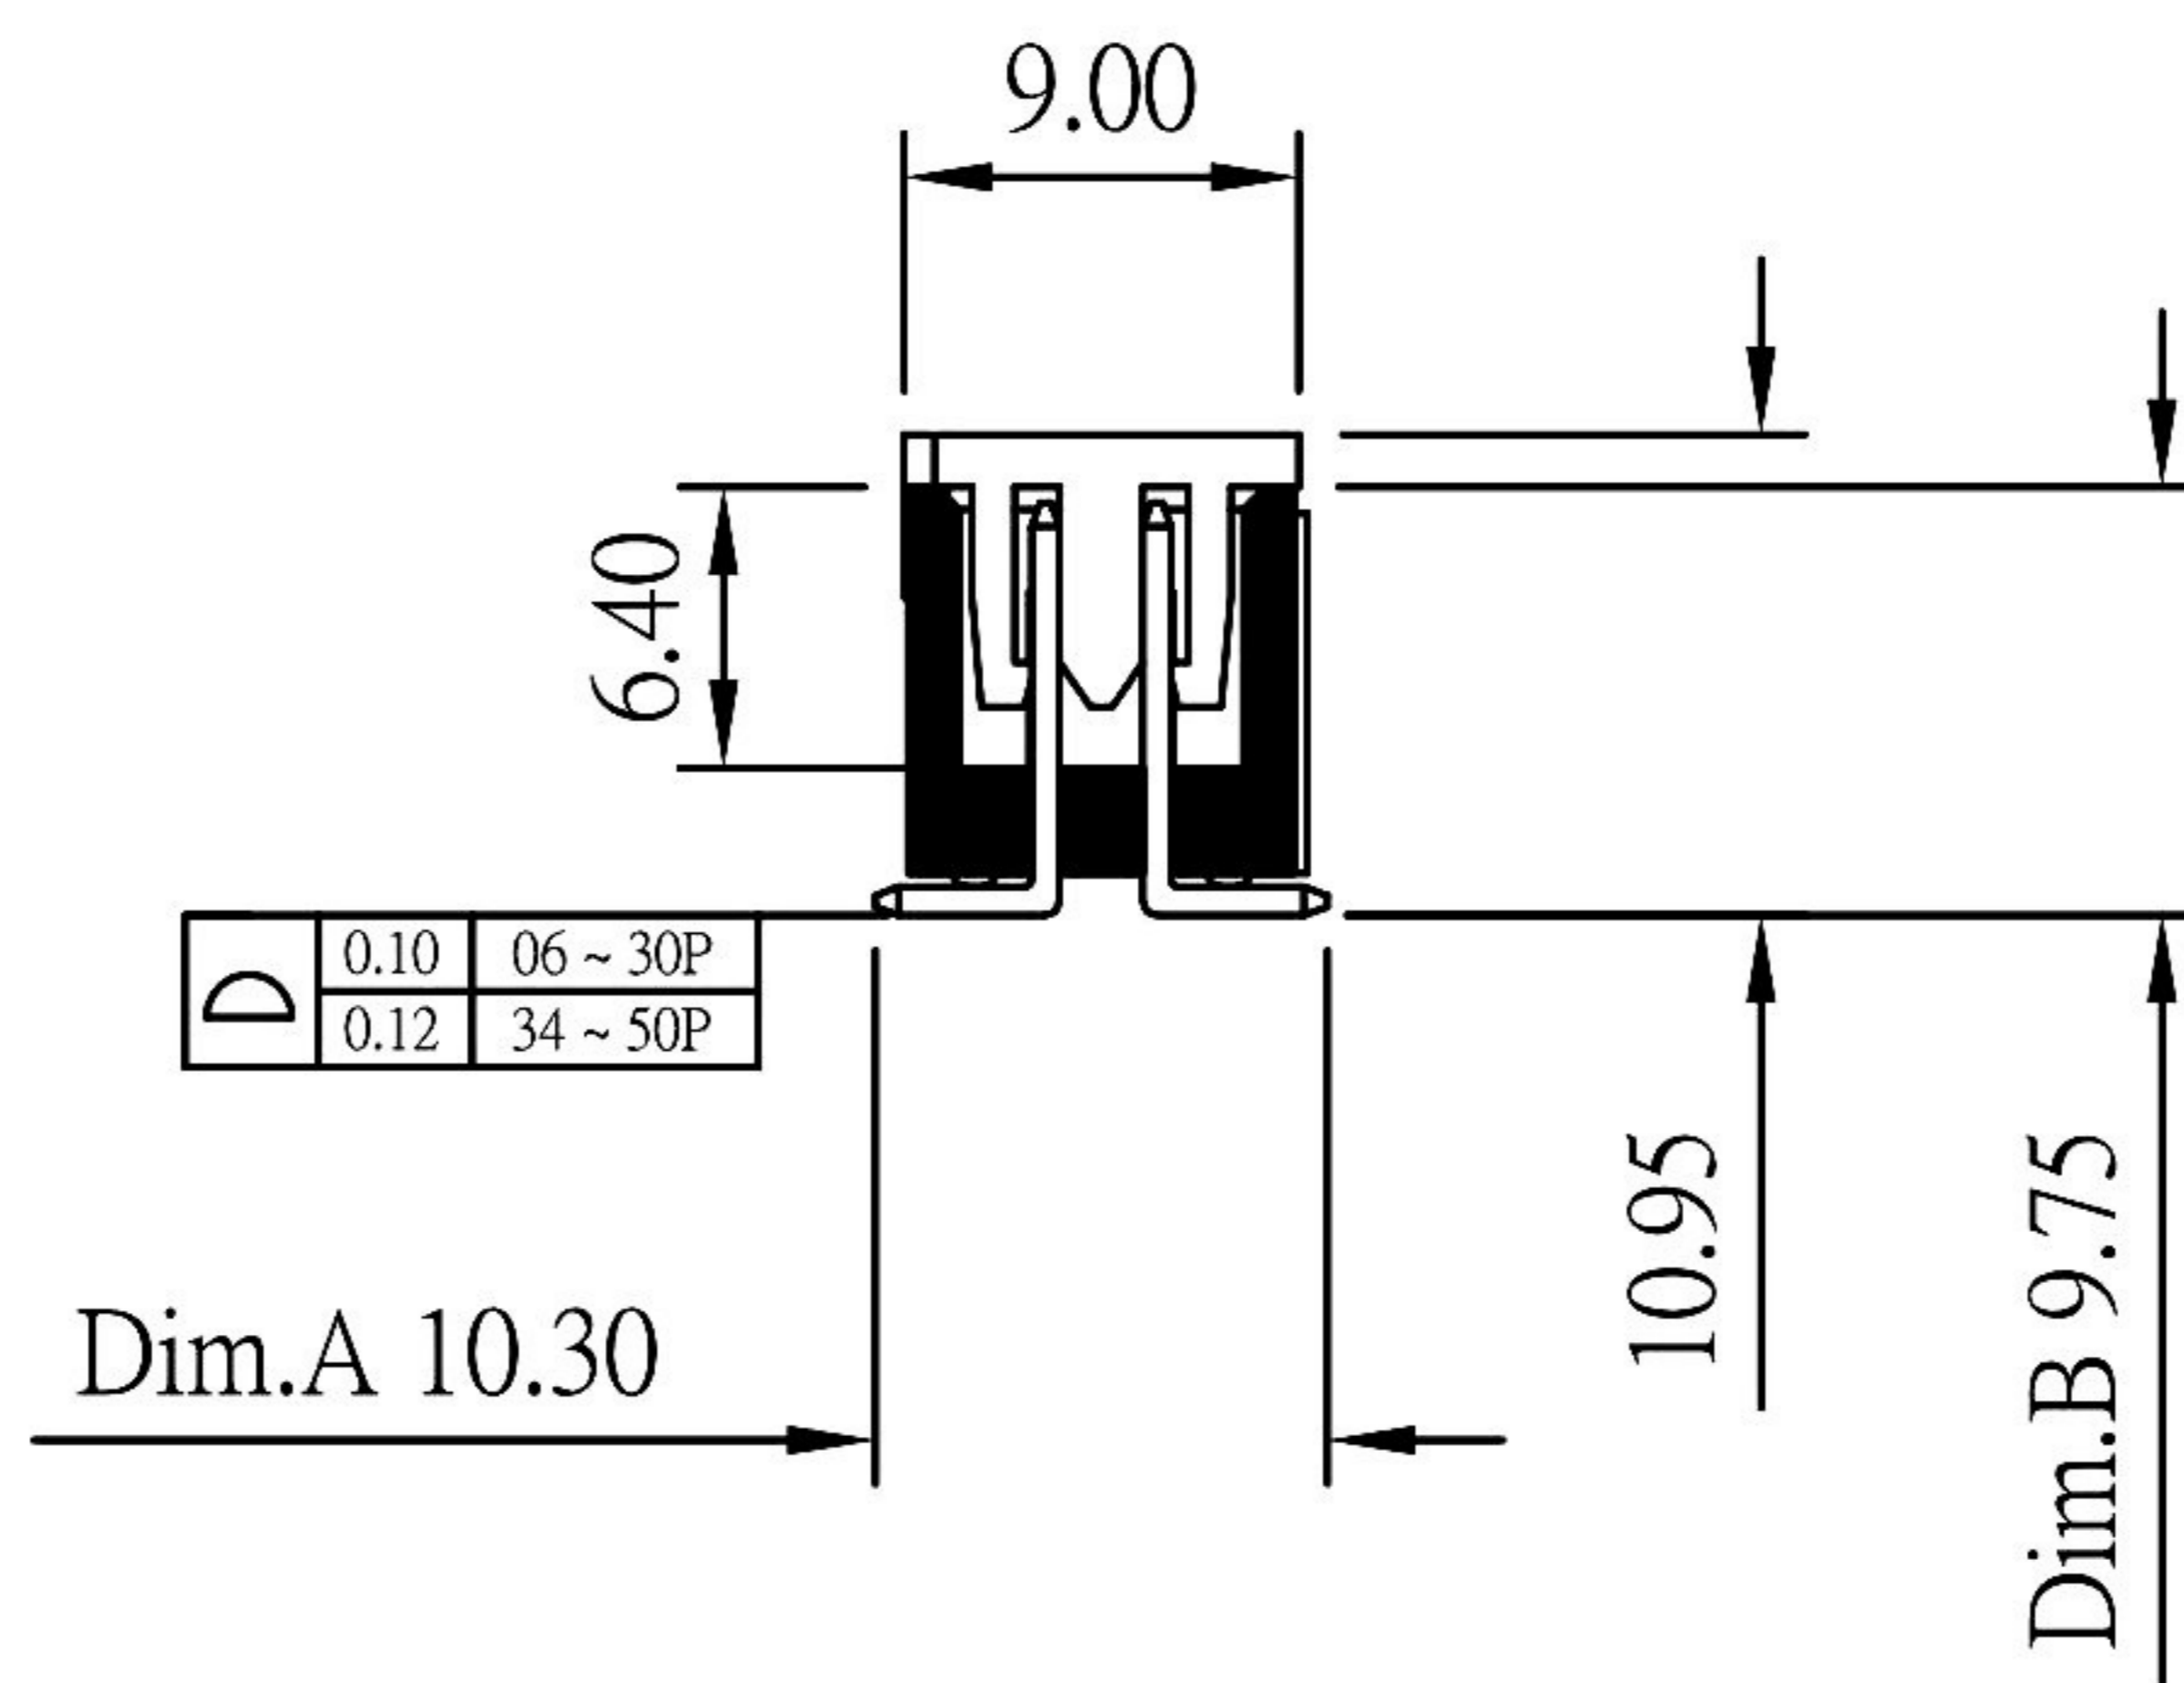

Recommended P.C. Board
SMD Layout

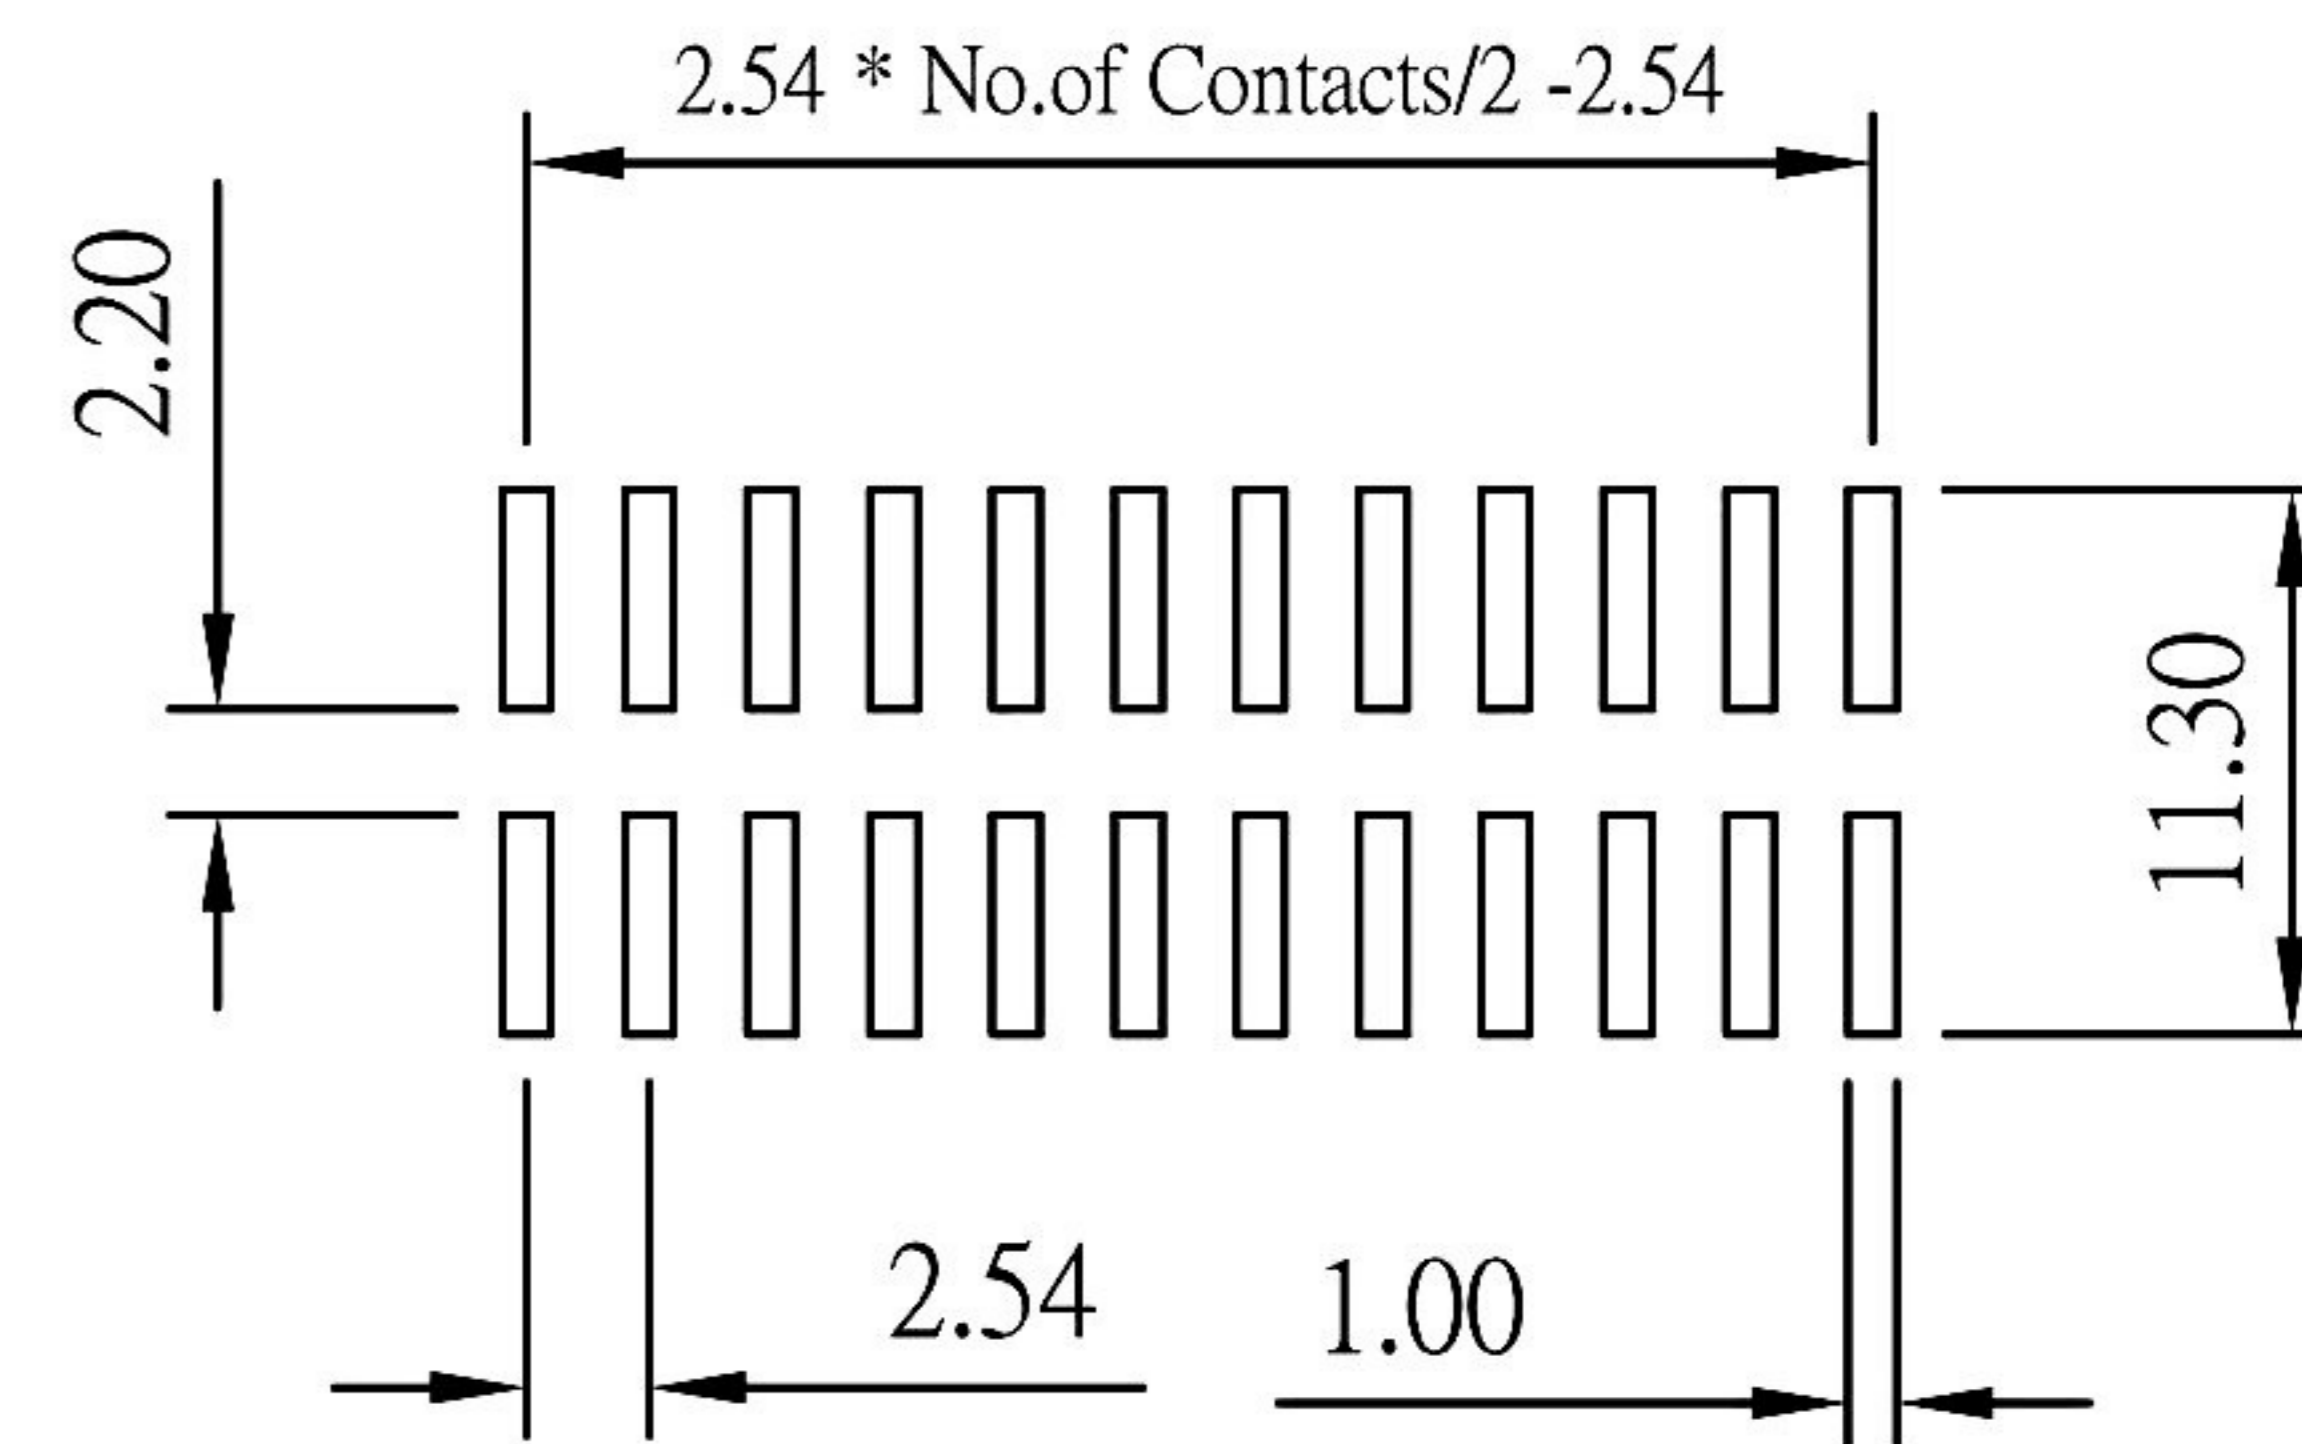

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .X ±0.3 .XX ±0.2 .XXX ±0.100	PART NAME 品名 BOX HEADER 2.54mm X 2.54mm XXPIN(2XXXP) SMT TYPE MATERIAL: NYLON 6T GOLD FLASH PLATING WITHOUT LOCATING PEG BLACK INSULATOR ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C3514-XXDLGBXNR
DATE 制表日 2020/09/04	PAGE 張數 1 OF 1	REV. 版次 A	