

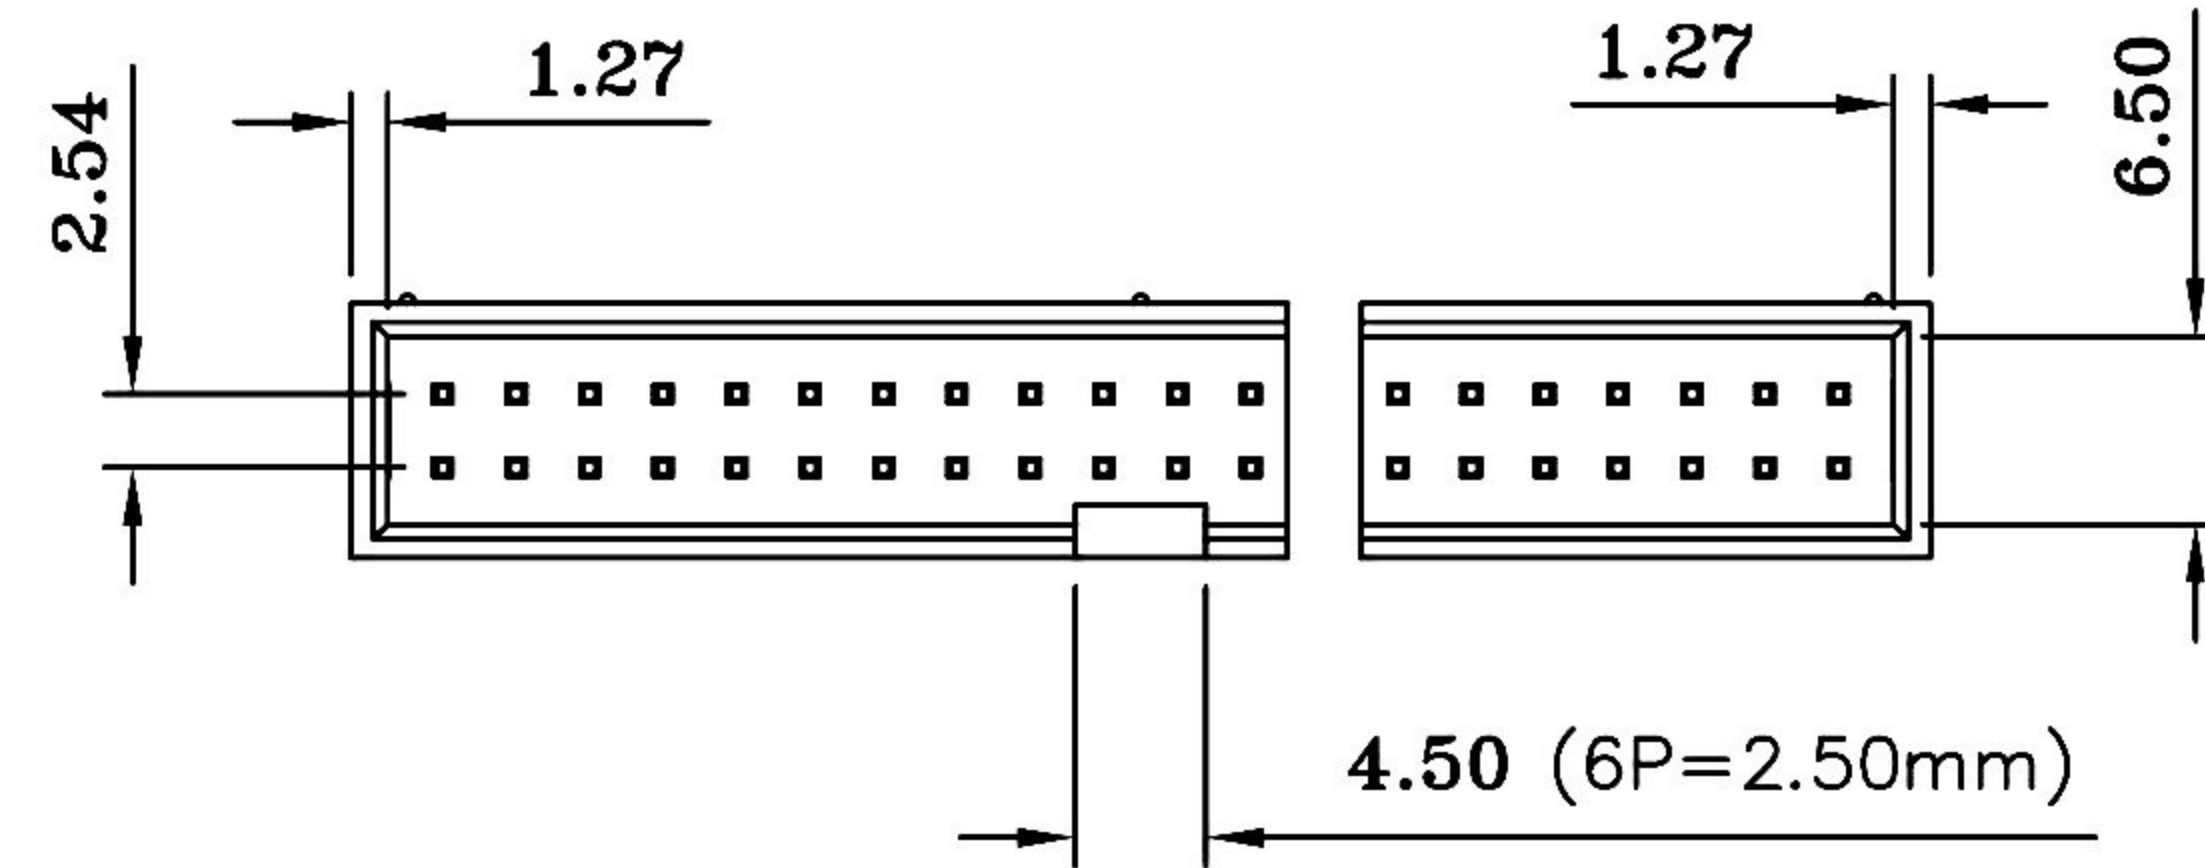
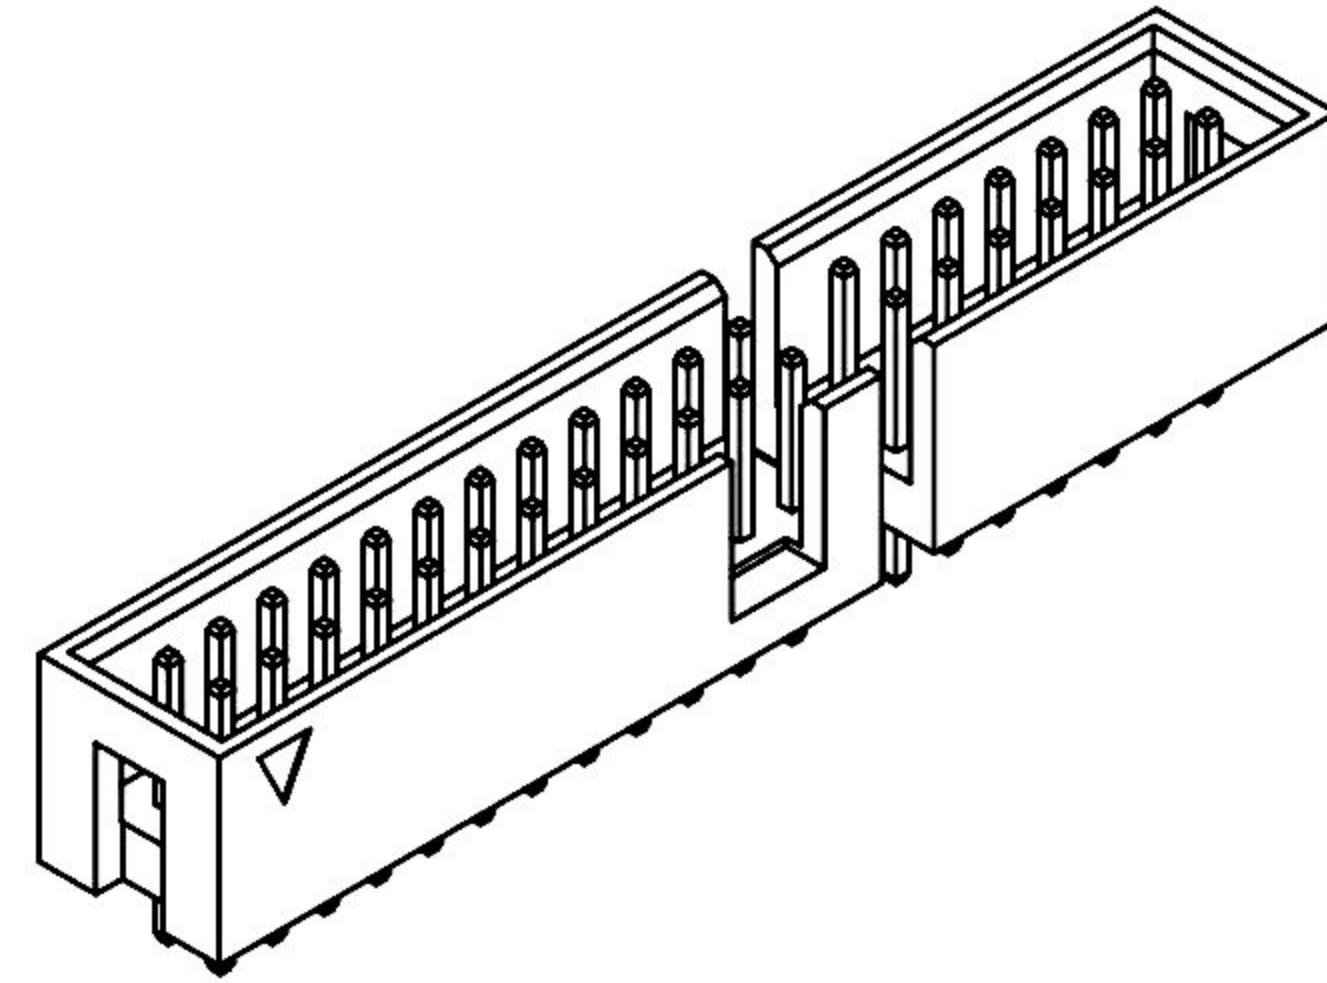
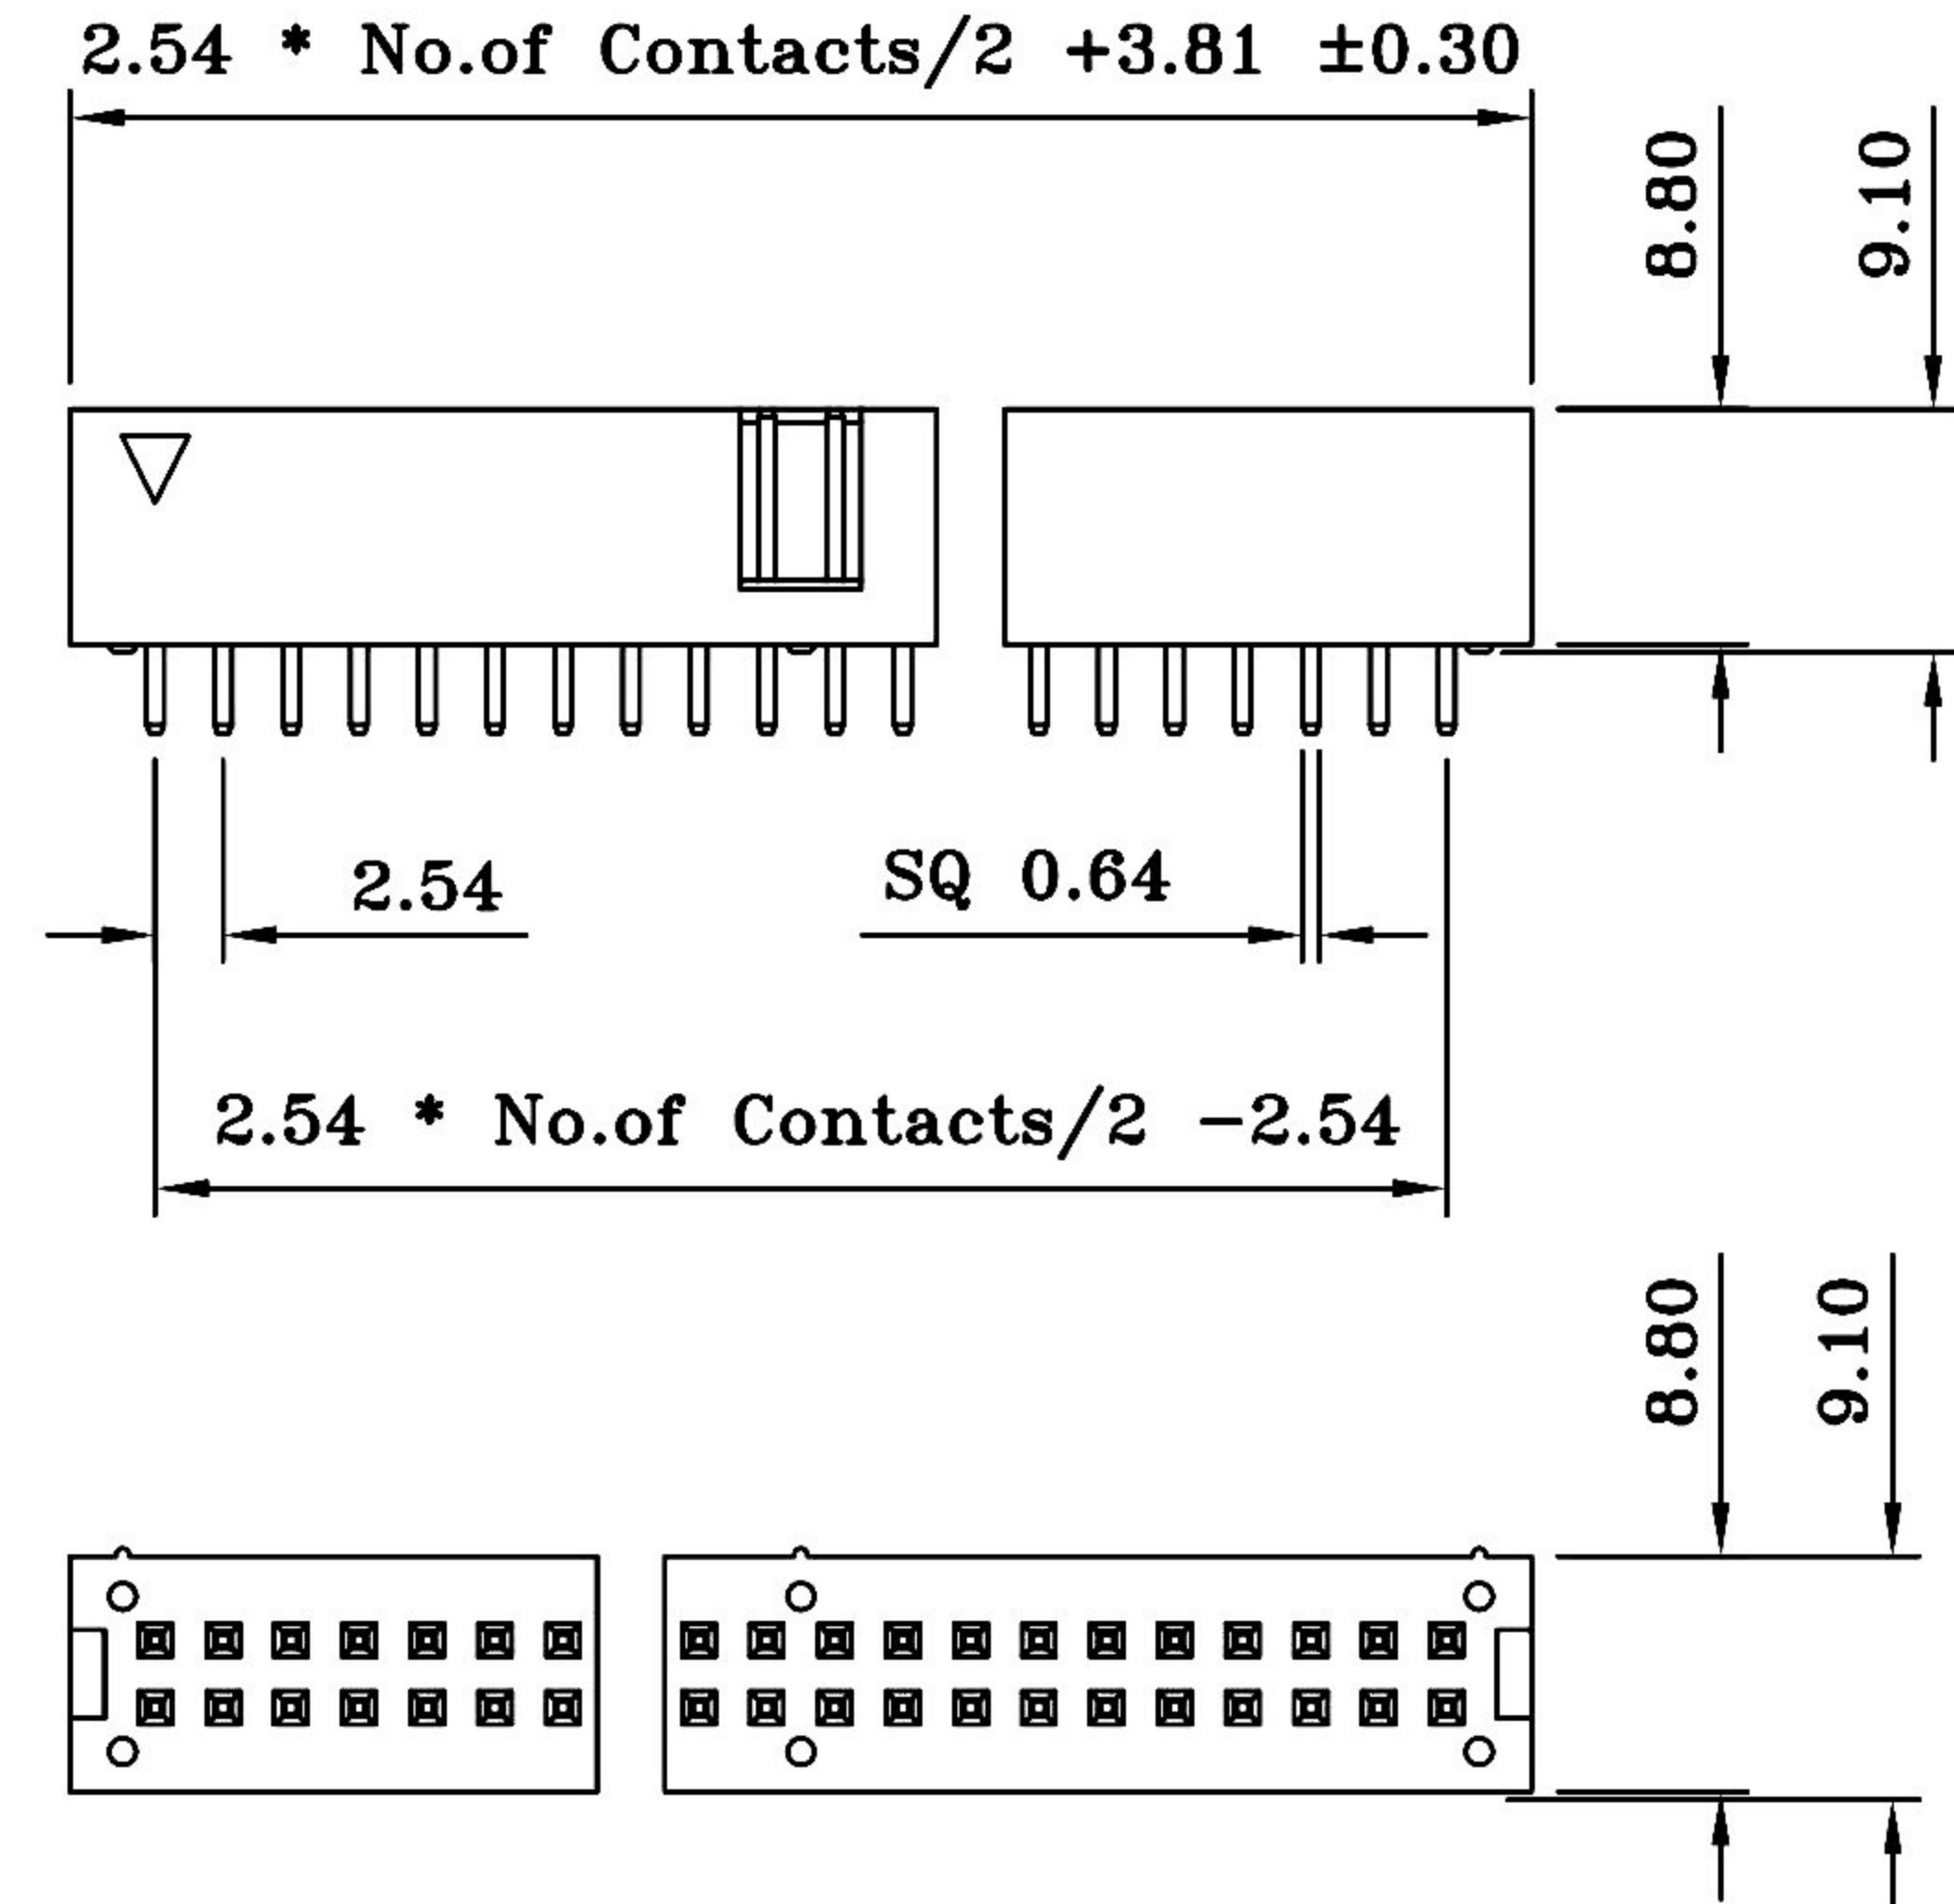


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 1000V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy (Brass)
 Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T
 Finish: Tin,Gold Plated
 Standard: Gold Flash all over

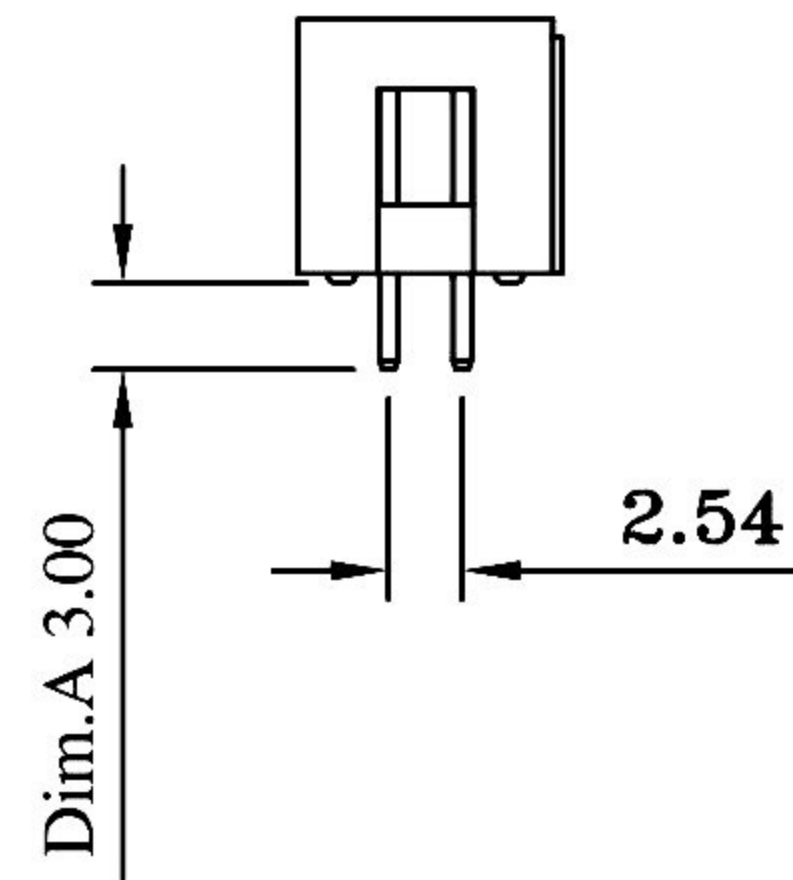

Recommended P.C. Board Hole Layout

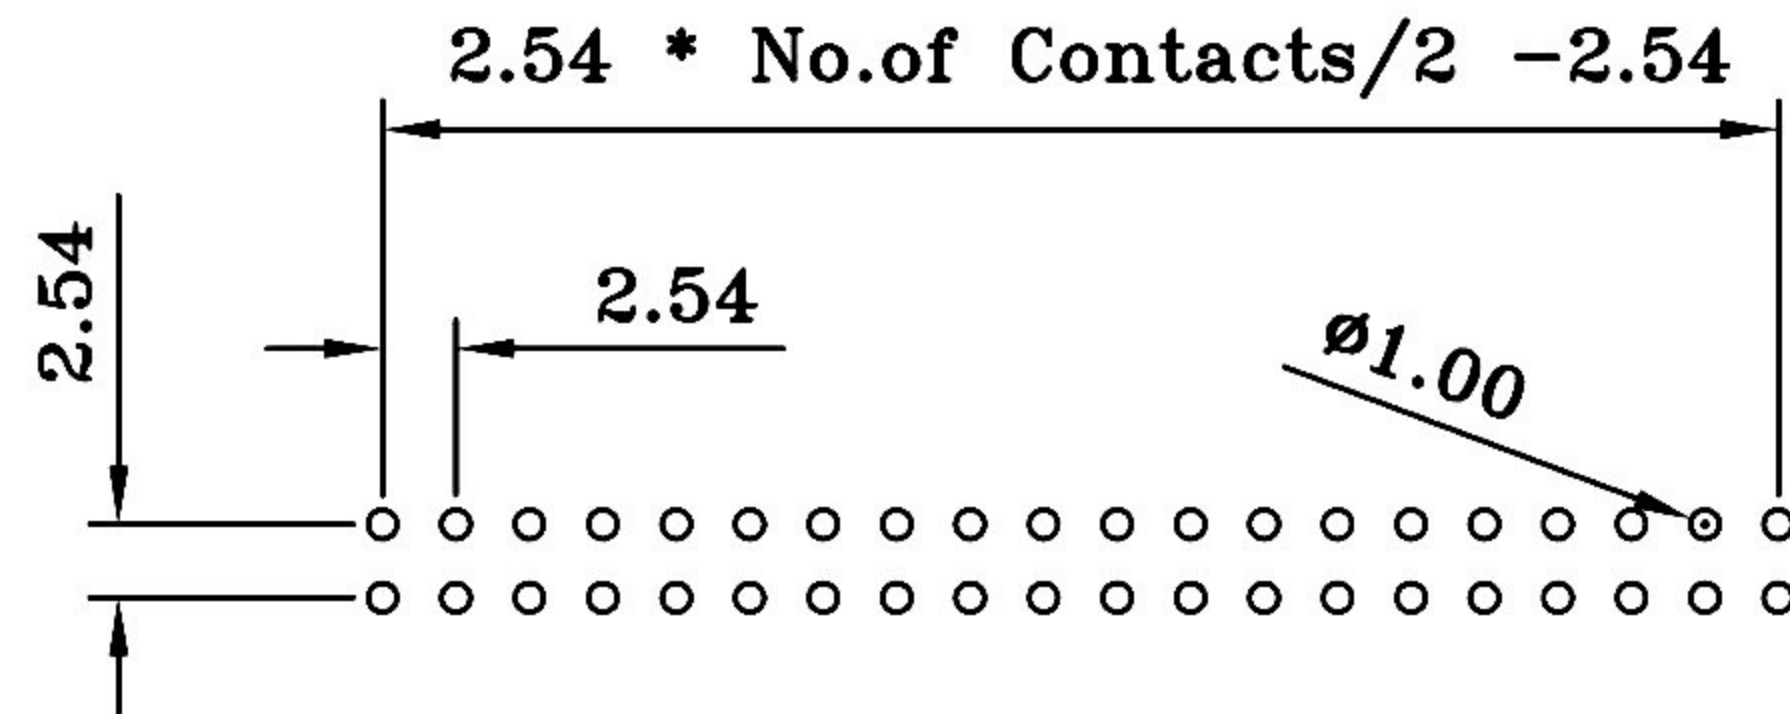

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 .X ±0.3 .XX ±0.20 .XXX ±0.100	PART NAME 品名 BOX HEADER 2.54mm X 2.54mm XXPIN(2XXXP) 180° MATERIAL:NYLON 6T WITHOUT LOCATING PEG BLACK INSULATOR ROHS
DWG. 製圖 ABBY		UNIT 單位 MM	SIZE. 紙張尺寸 A 4
DATE 制表日 2020/09/03	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C3514-XXSLXBXNR