

FEATURE:

INSULATOR

Glass-Filled PBT is 94V-0 rated

CONTACT

Phosphor Bronze selective gold plating over nickel

SPECIFICATION:

Current Rating : 3 amperes

Contact Resistance : 20 miniohms max.

Operation Temperature : -55°C to +105°C


Voltage Rating : 800 VAC 1 minute

Insulation Resistance : 5000 megaohms min.

Insertion Force : 412 grams max. per pair

Withdrawal Force : 32 grams min. per pair

| CONTACT NO | DIM A | DIM B | DIM C | DIM D | DIM E |
|------------|--------|--------|--------|--------|--------|
| 12/24 | 51.69 | 45.09 | 37.38 | 33.22 | 27.94 |
| 22/44 | 77.09 | 70.49 | 62.78 | 58.62 | 53.34 |
| 24/48 | 82.17 | 75.57 | 67.86 | 63.70 | 58.42 |
| 25/50 | 84.71 | 78.11 | 70.40 | 66.24 | 60.96 |
| 28/56 | 92.33 | 85.73 | 78.02 | 73.86 | 68.58 |
| 30/60 | 97.41 | 90.81 | 83.10 | 78.94 | 73.66 |
| 35/70 | 110.11 | 103.51 | 95.80 | 91.64 | 86.36 |
| 36/72 | 112.65 | 106.05 | 98.34 | 94.18 | 88.90 |
| 43/86 | 130.43 | 123.83 | 116.12 | 111.96 | 106.68 |
| 44/88 | 133.17 | 126.57 | 118.66 | 114.50 | 109.22 |
| 50/100 | 148.21 | 141.61 | 133.90 | 129.74 | 124.46 |

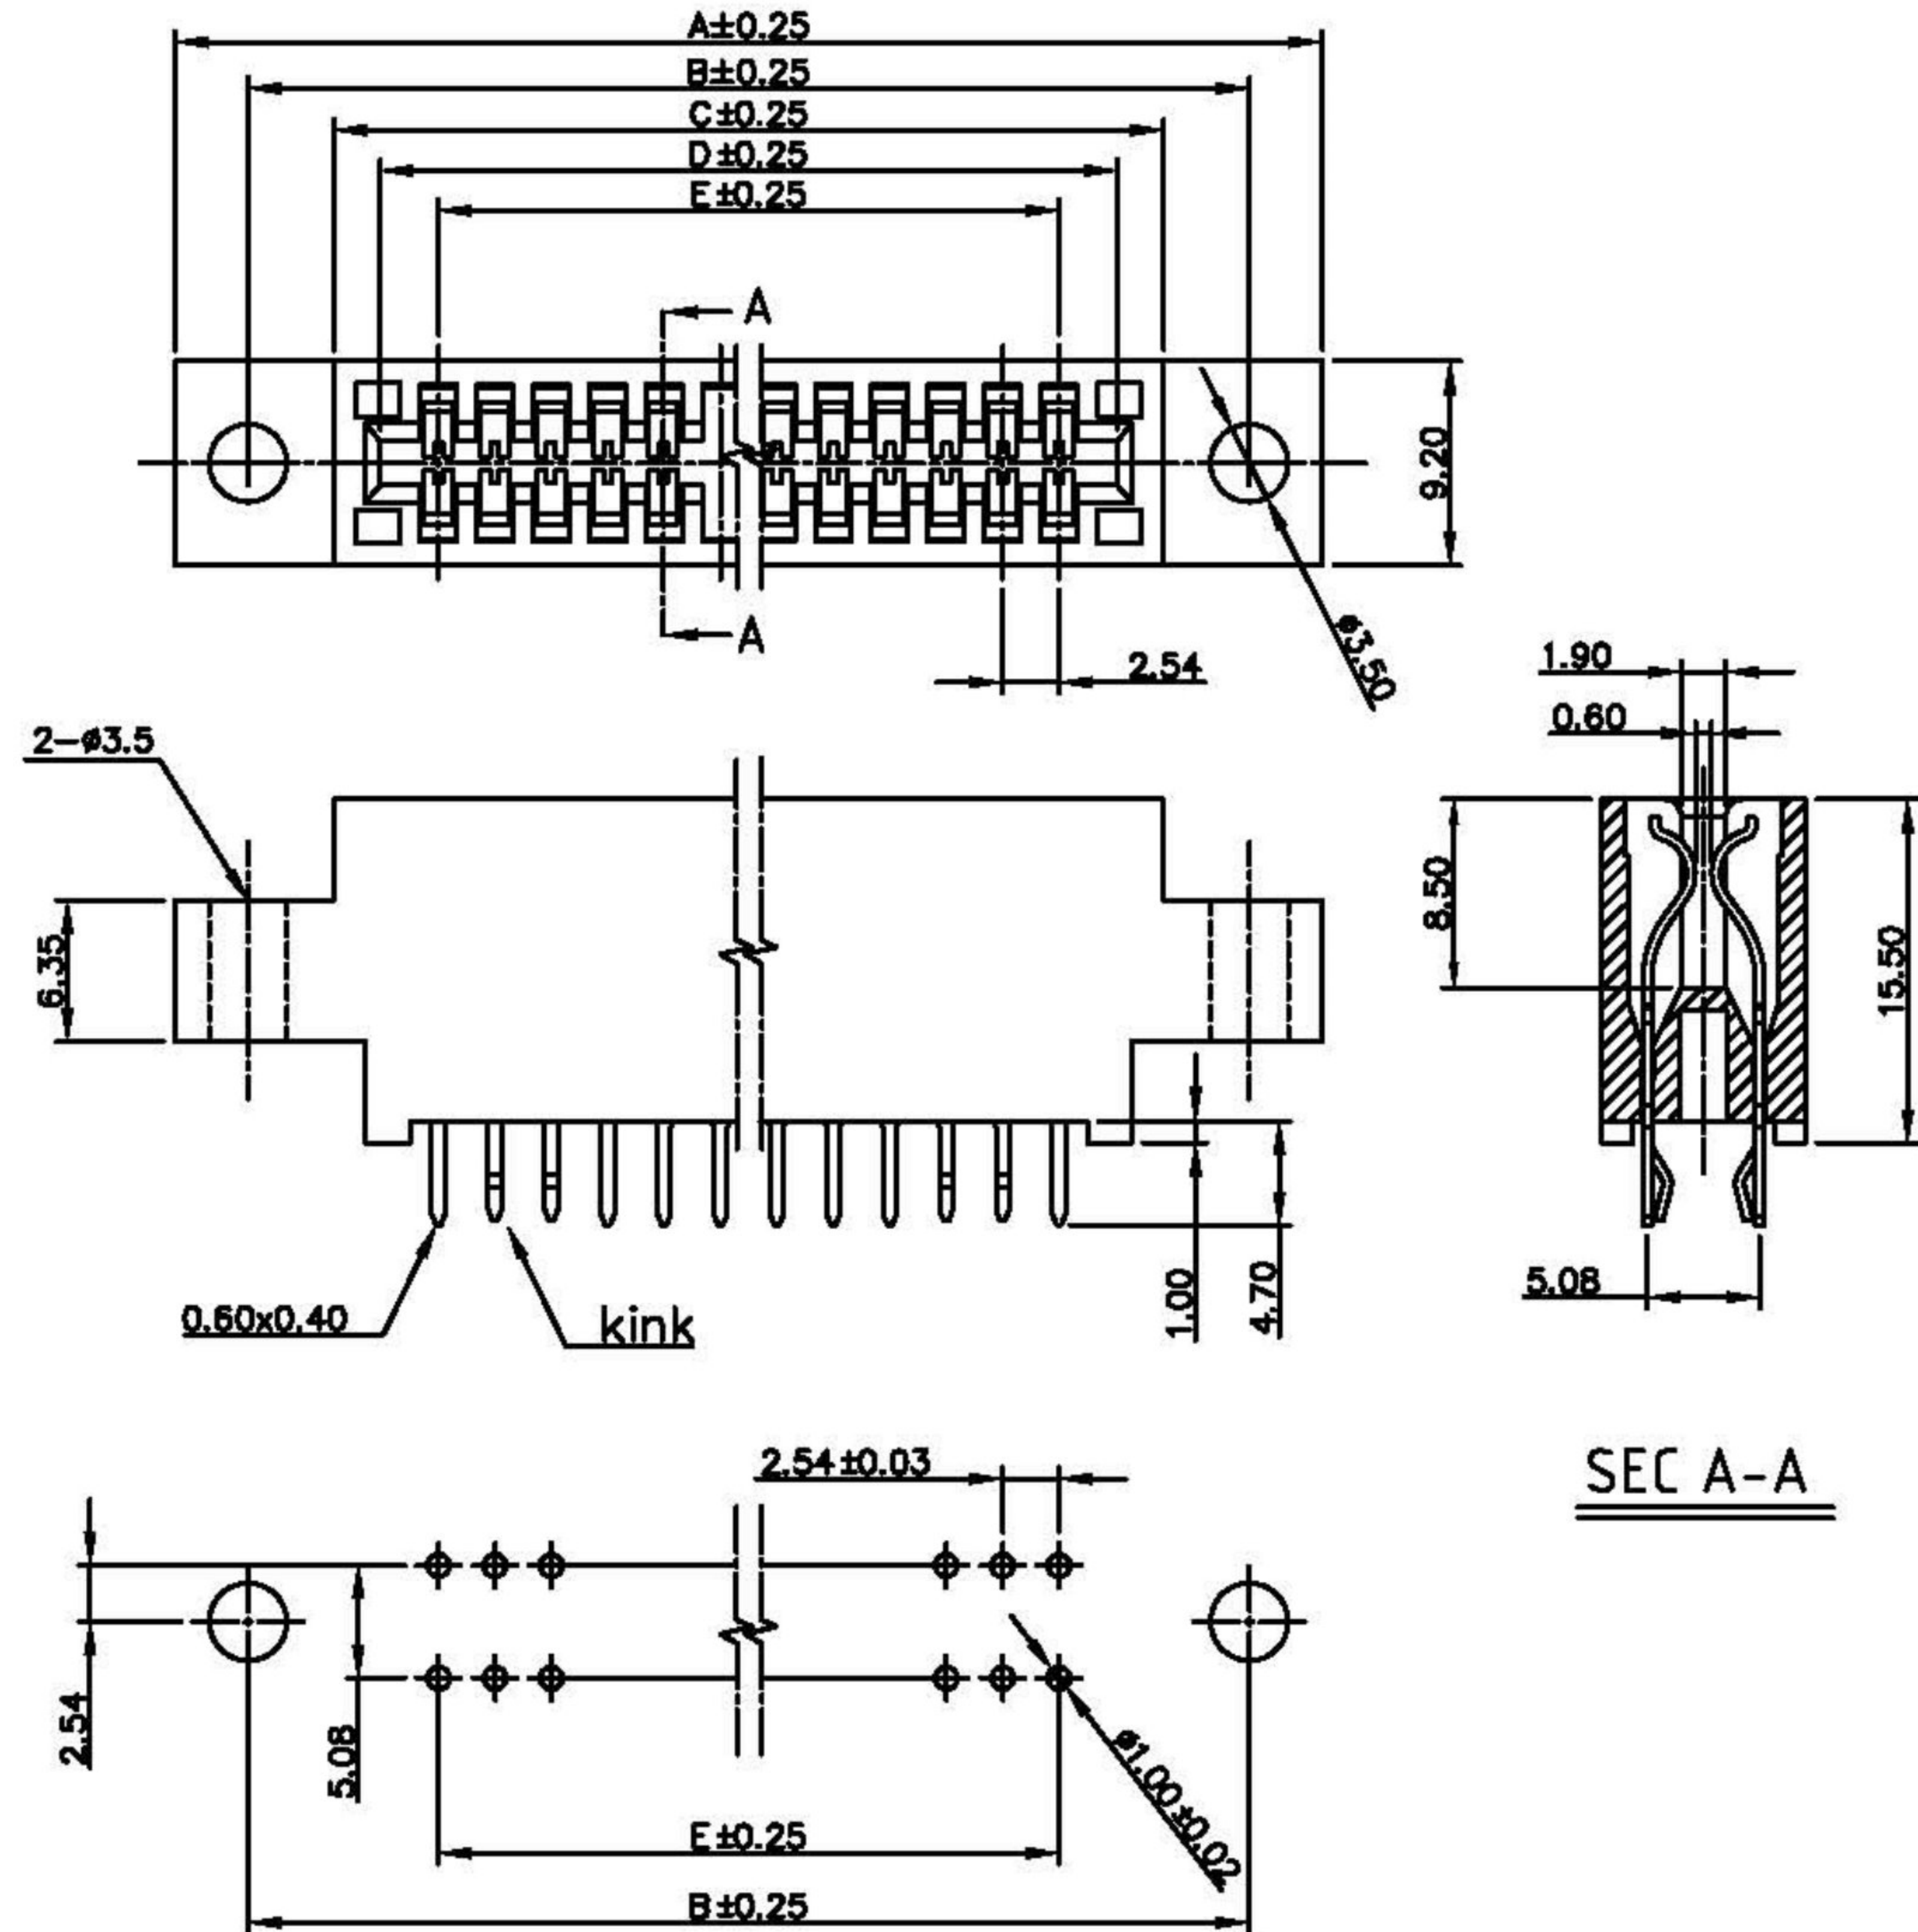

| | | | |
|----------------------------|-----------------------|---|--|
| <p>RoHS Compliant</p> | | <p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p> | |
| <p>APPD. 核准 HELEN</p> | <p>SCALE 比例 參考</p> | <p>TOLERANCE 容許公差 X ± 0.50 .X ± 0.38 XX ± 0.25</p> | <p>PART NAME 品名 2.54mm SLOT XXP 180° WITH EAR WITH KINK S/L=4.7mm ROW TO ROW=5.08mm SELECTIVE GOLD PLATING MATERIAL:PHOSPHOR BRONZE BLACK COLOR ROHS</p> |
| <p>DWG. 製圖 ABBY</p> | <p>UNIT 單位 MM</p> | <p>SIZE. 紙張尺寸 A4</p> | <p>PART NO. 料號 C3602-XXYBPSB0R</p> |
| <p>DATE 制表日 2012/02/02</p> | <p>PAGE 張數 1 OF 1</p> | <p>REV. 版次 A</p> | |