

NOTES 1:

***Material**

Housing: PA10T, UL 94V-0.
 Cap: LCP, UL 94V-0.
 Contacts: Copper Alloy.
 Plating: Au Plating on Contact Area.
 Sn (100u" Min.) plating on solder tail.
 Ni (50u" Min.) underplating overall.
 EMI: Stainless steel.
 Harpoon: Brass.
 Plating: Ni (50u" Min.) plating overall.

***Mechanical:**

Insertion Force: 1.15N max per contact pair.
 Withdrawal Force: 0.15N min per contact pair.
 Contact Retention Force: 3.43N min per contact.
 Durability: 50 cycles.

***Electrical Specification**

Current Rating : 1.1 Ampere.
 Contact Resistance : 30 mΩ Max.
 Insulation Resistance : 1000 MΩ Min.
 Dielectric Withstanding Voltage: 500 VAC.

***Environmental**

Operating Temperature: -55°C To +105°C

#POS REF	DIM'A	DIM'B	DIM'C	DIM'D	DIM'E	DIM'F
36P	25.00	7.65	6.00	8.15	9.15	27.00
64P	39.00	21.65	20.00	22.15	23.15	41.00
98P	56.00	38.65	37.00	39.15	40.15	58.00
164P	89.00	71.65	70.00	72.15	73.15	91.00

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

PART NAME 品名
 1.0MM PCI EXPRESS GEN5 SMT TYPE XXPIN WITH POSTS BODY MATERIAL-PA10T UL94V-0 (HALOGEN FREE) BLACK INSULATOR PAD+TRAY PACKING ROHS

PART NO.
 料號 C3626-XXPYUXBE0R

APPD. 核准: **Betty**

DWG. 製圖: **Betty**

DATE 制表日: 2023/02/21

SCALE 比例: 參考

UNIT 單位: MM

PAGE 頁數: 1 OF 2

Tolerance Unless Otherwise Specified: XX - ±0.25, XXX - ±0.50, Angle - 3.0°

SIZE 紙張尺寸: A 4

REV. 版本: A


PCI Express Connectors Pinout

Shorting

Side A	Pin #	Side B
Signal	1	Power
Power	2	Power
Power	3	Power
Ground	4	Ground
Signal	5	Signal
Signal	6	Signal
Signal	7	Ground
Signal	8	Power
Power	9	Signal
Power	10	Power
Signal	11	Signal
Ground	12	Signal
Signal	13	Ground
Signal	14	Signal
Ground	15	Signal
Signal	16	Ground
Signal	17	Signal
Ground	18	Ground
Signal	19	Signal
Ground	20	Signal
Signal	21	Ground
Signal	22	Ground
Ground	23	Signal
Ground	24	Signal
Signal	25	Ground
Signal	26	Ground
Ground	27	Signal
Ground	28	Signal
Signal	29	Ground
Signal	30	Signal
Ground	31	Signal
Signal	32	Ground
Signal	33	Signal
Ground	34	Signal
Signal	35	Ground
Signal	36	Ground
Ground	37	Signal
Ground	38	Signal
Signal	39	Ground
Signal	40	Ground
Ground	41	Signal

Side A	Pin #	Side B
Ground	42	Signal
Signal	43	Ground
Signal	44	Ground
Ground	45	Signal
Ground	46	Signal
Signal	47	Ground
Signal	48	Signal
Ground	49	Ground
Signal	50	Signal
Ground	51	Signal
Signal	52	Ground
Signal	53	Ground
Ground	54	Signal
Ground	55	Signal
Signal	56	Ground
Signal	57	Ground
Ground	58	Signal
Ground	59	Signal
Signal	60	Ground
Signal	61	Ground
Ground	62	Signal
Ground	63	Signal
Signal	64	Ground
Signal	65	Ground
Ground	66	Signal
Ground	67	Signal
Signal	68	Ground
Signal	69	Ground
Ground	70	Signal
Ground	71	Signal
Signal	72	Ground
Signal	73	Ground
Ground	74	Signal
Ground	75	Signal
Signal	76	Ground
Signal	77	Ground
Ground	78	Signal
Ground	79	Signal
Signal	80	Ground
Signal	81	Signal
Ground	82	Signal

Shorting

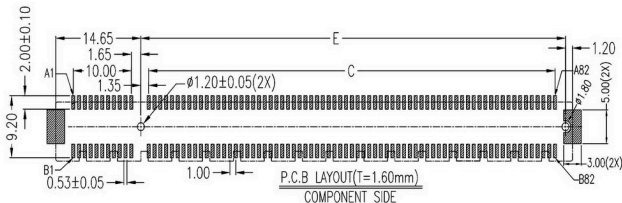

NOTES 2(Ground Pin Position):

- 36P: A12, A15, A18, B13, B16, B18,
- 64P: A12, A15, A18, A20, A23, A24, A27, A28, A31, B13, B16, B18, B21, B22, B25, B26, B29, B32,
- 98P: A12, A15, A18, A20, A23, A24, A27, A28, A31, A34, A37, A38, A41, A42, A45, A46, A49, B13, B16, B18, B21, B22, B25, B26, B29, B32, B35, B36, B39, B40, B43, B44, B47, B49,
- 164P: A12, A15, A18, A20, A23, A24, A27, A28, A31, A34, A37, A38, A41, A42, A45, A46, A49, A51, A54, A55, A58, A59, A62, A63, A66, A67, A70, A71, A74, A75, A78, A79, A82, B13, B16, B18, B21, B22, B25, B26, B29, B32, B35, B36, B39, B40, B43, B44, B47, B49, B52, B53, B56, B57, B60, B61, B64, B65, B68, B69, B72, B73, B76, B77, B80.

RoHS Compliant		宏茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 料號	SCALE 比例	Tolerance Unless Otherwise Specified XX - ±0.25 XXX - ±0.50 Angle 角度	PART NAME 品名 1.0MM PCI EXPRESS GEN5 SMT TYPE XXPIN WITH POSTS BODY MATERIAL-PA10T UL94V-0 (HALOGEN FREE) BLACK INSULATOR PAD+TRAY PACKING ROHS
DWG. 圖號	UNIT 單位	SIZE 紙張尺寸	PART NO.
DATE 制表日	M M	A 4	料號 C3626-XXPYUXBE0R
2023/02/21	PAGE 頁數	REV 版本	
	2 OF 2	A	