
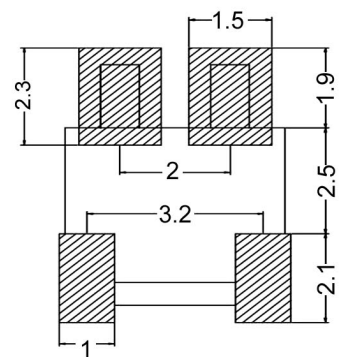
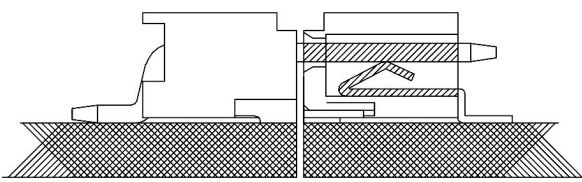





1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H



- NOTE:
- 1.Insulator Material : LCP
 - 2.Terminal Material : Brass
 3. Plating : Tin
 - 4.Operating temperature range: -25°C ~ +85°C
 - 5.Rated voltage: 250V, AC,DC
 - 6.Contact resistance : $\leq 0.04\Omega$
 - 7.Insulation resistance: $\geq 800m\Omega$
 - 8.Withstand voltage: 200V,AC/minute

RoHS Compliant **HSM** 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

DIM	TOL	DIM	TOL
X.	±0.30	X.	/
X.X	±0.25	X.X	±2°
X.XX	±0.20	X.XX	±1°
X.XXX	±0.05	X.XXX	

APPD. 核准		PART NAME 品名 2.0mm LED CONNECTOR 2PIN FEMALE SMT 90° TYPE MATERIAL:BRASS TIN PLATING REEL PACKING BEIGE COLOR(MATERIAL:LCP) ROHS
DWG. 製圖	SCALE 比例 參考	
DATE 制表日 2019/08/28	UNIT 單位 M M	SIZE. 紙張尺寸 A 4
Betty	PAGE 張數 1 OF 1	REV. 版次 A
		PART NO. 料號 C3804-02FBNTRCR

1 2 3 4 5 6 7 8