
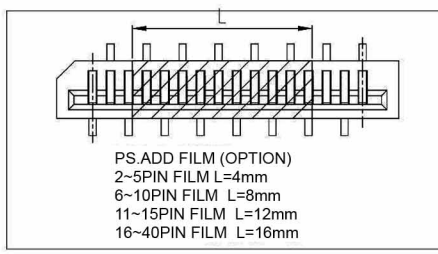


1 2 3 4 5 6 7 8






A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

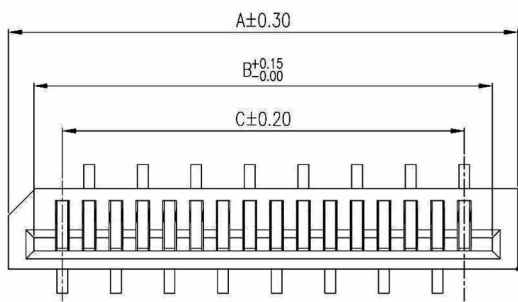

NOTE:

- MATERIAL  
HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.  
CONTACT: COPPER ALLOY.  
PLATING: TIN PLATED OVER NICKEL.
- ELECTRICAL  
CURRENT RATING: 1 AMP.  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.  
INSULATION RESISTANCE: 500MΩ MIN.  
CONTACT RESISTANCE: 30mΩ MAX.
- ENVIRONMENTAL  
TEMPERATURE RANGE: -25°C TO +85°C.

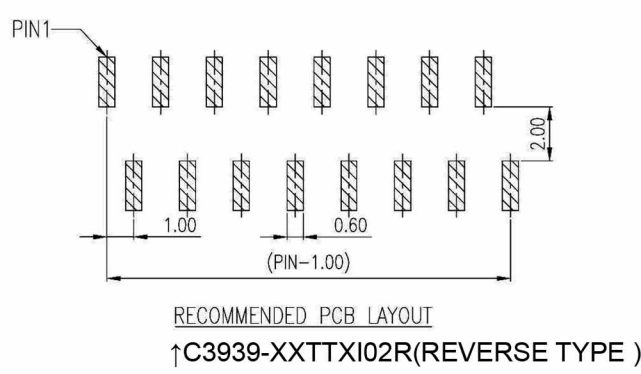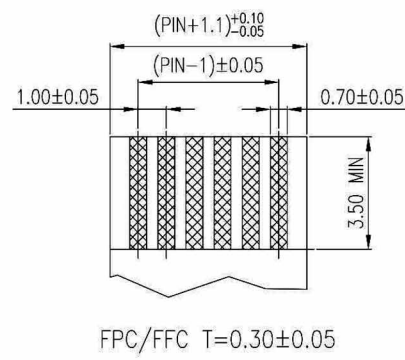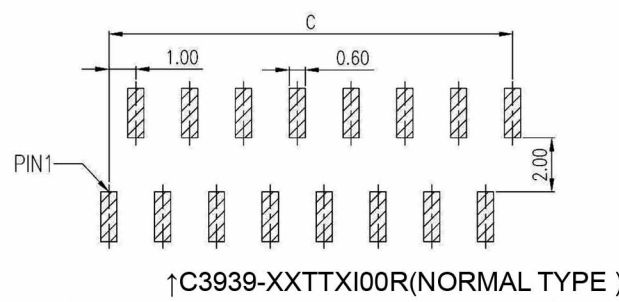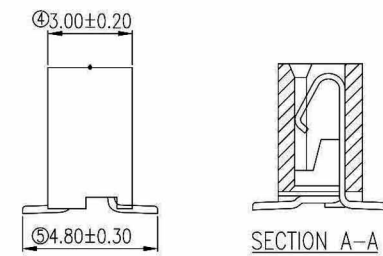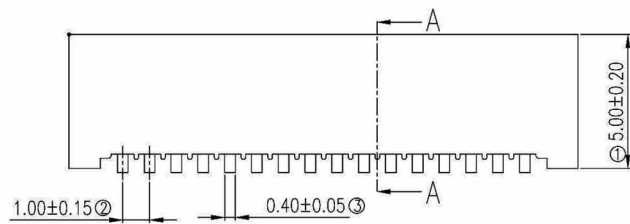

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
3	6.00	4.20	2.00	22	25.00	23.20	21.00
4	7.00	5.20	3.00	23	26.00	24.20	22.00
5	8.00	6.20	4.00	24	27.00	25.20	23.00
6	9.00	7.20	5.00	25	28.00	26.20	24.00
7	10.00	8.20	6.00	26	29.00	27.20	25.00
8	11.00	9.20	7.00	27	30.00	28.20	26.00
9	12.00	10.20	8.00	28	31.00	29.20	27.00
10	13.00	11.20	9.00	29	32.00	30.20	28.00
11	14.00	12.20	10.00	30	33.00	31.20	29.00
12	15.00	13.20	11.00	31	34.00	32.20	30.00
13	16.00	14.20	12.00	32	35.00	33.20	31.00
14	17.00	15.20	13.00	33	36.00	34.20	32.00
15	18.00	16.20	14.00	34	37.00	35.20	33.00
16	19.00	17.20	15.00	35	38.00	36.20	34.00
17	20.00	18.20	16.00	36	39.00	37.20	35.00
18	21.00	19.20	17.00	37	40.00	38.20	36.00
19	22.00	20.20	18.00	38	41.00	39.20	37.00
20	23.00	21.20	19.00	39	42.00	40.20	38.00
21	24.00	22.20	20.00	40	43.00	41.20	39.00

**RoHS Compliant**

**HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准		TOLERANCE	PART NAME 品名
		MM INCH	FPC/FFC NON-ZIF 1.0mm SMT TOP ENTRY TYPE XXP
DWG. 製圖 Hedy	SCALE 比例 參考	SIZE. 紙張尺寸 A4	PIN TYPE: REVERSE TYPE OR NORMAL TYPE
DATE 制表日 2020/02/20	UNIT 單位 MM	REV. 版次 A	TIN PLATING IVORY COLOR ROHS
	PAGE 張數 1 / 1		PART NO. 料號 C3939-XXTTX10XR

1 2 3 4 5 6 7 8