
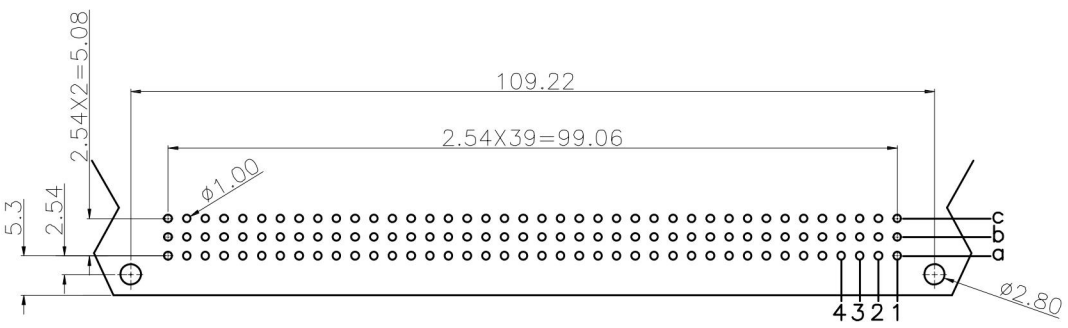
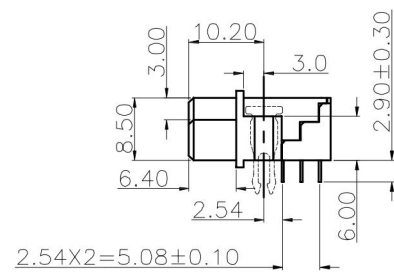


**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
 Contacts: Copper Alloy.  
 Lock: Copper Alloy.

**Electrical Characteristics:**

Current Rating: 2AMP,  
 Dielectric Withstanding Voltage: AC 1000V For 1 minute,  
 Insulator Resistance: 1000M $\Omega$  max. at DC 500V,  
 Contact Resistance: 20M $\Omega$  max. at DC 100mA,  
 Operating Temperature: -55°C~+105°C.  
 \*ROHS Compliant.

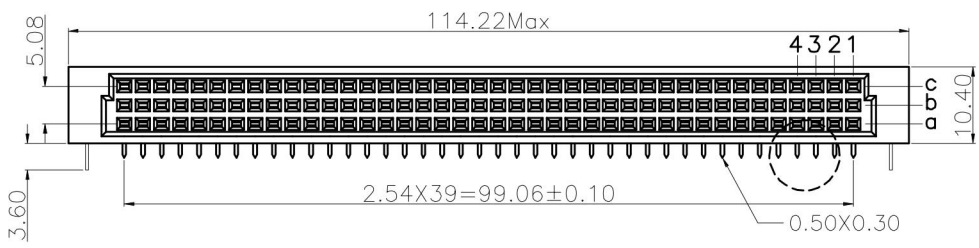

P.C. Board Layout

Pitch	Position	Rown With Contacts	Contact Arrange
2.54mm	120	a b c	
	80	a - c	
	40	a - -	



Dip Type

**RoHS Compliant**

**HSM 玄茂科技股份有限公司**  
**Hsuan Mao Technology Co., LTD.**

APPD.		TOLERANCE	PART NAME 品名 DIN41612 2.54mm DIP TYPE 90° 120P SIZE-A+B+C 120P FEMALE DIP LENGTH: 2.9mm SELECTIVE GOLD PLATING ROHS
DWG.	SCALE 参考	X ±0.5 .X ±0.25 .XX ±0.15	
DATE	UNIT mm	SIZE A 4	PART NO. 料號 C4165-C0FCDRS0R
2013/11/09	PAGE 1 OF 1	REV. A	