


Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.B. Layout
 (Tolerance: ±0.05)

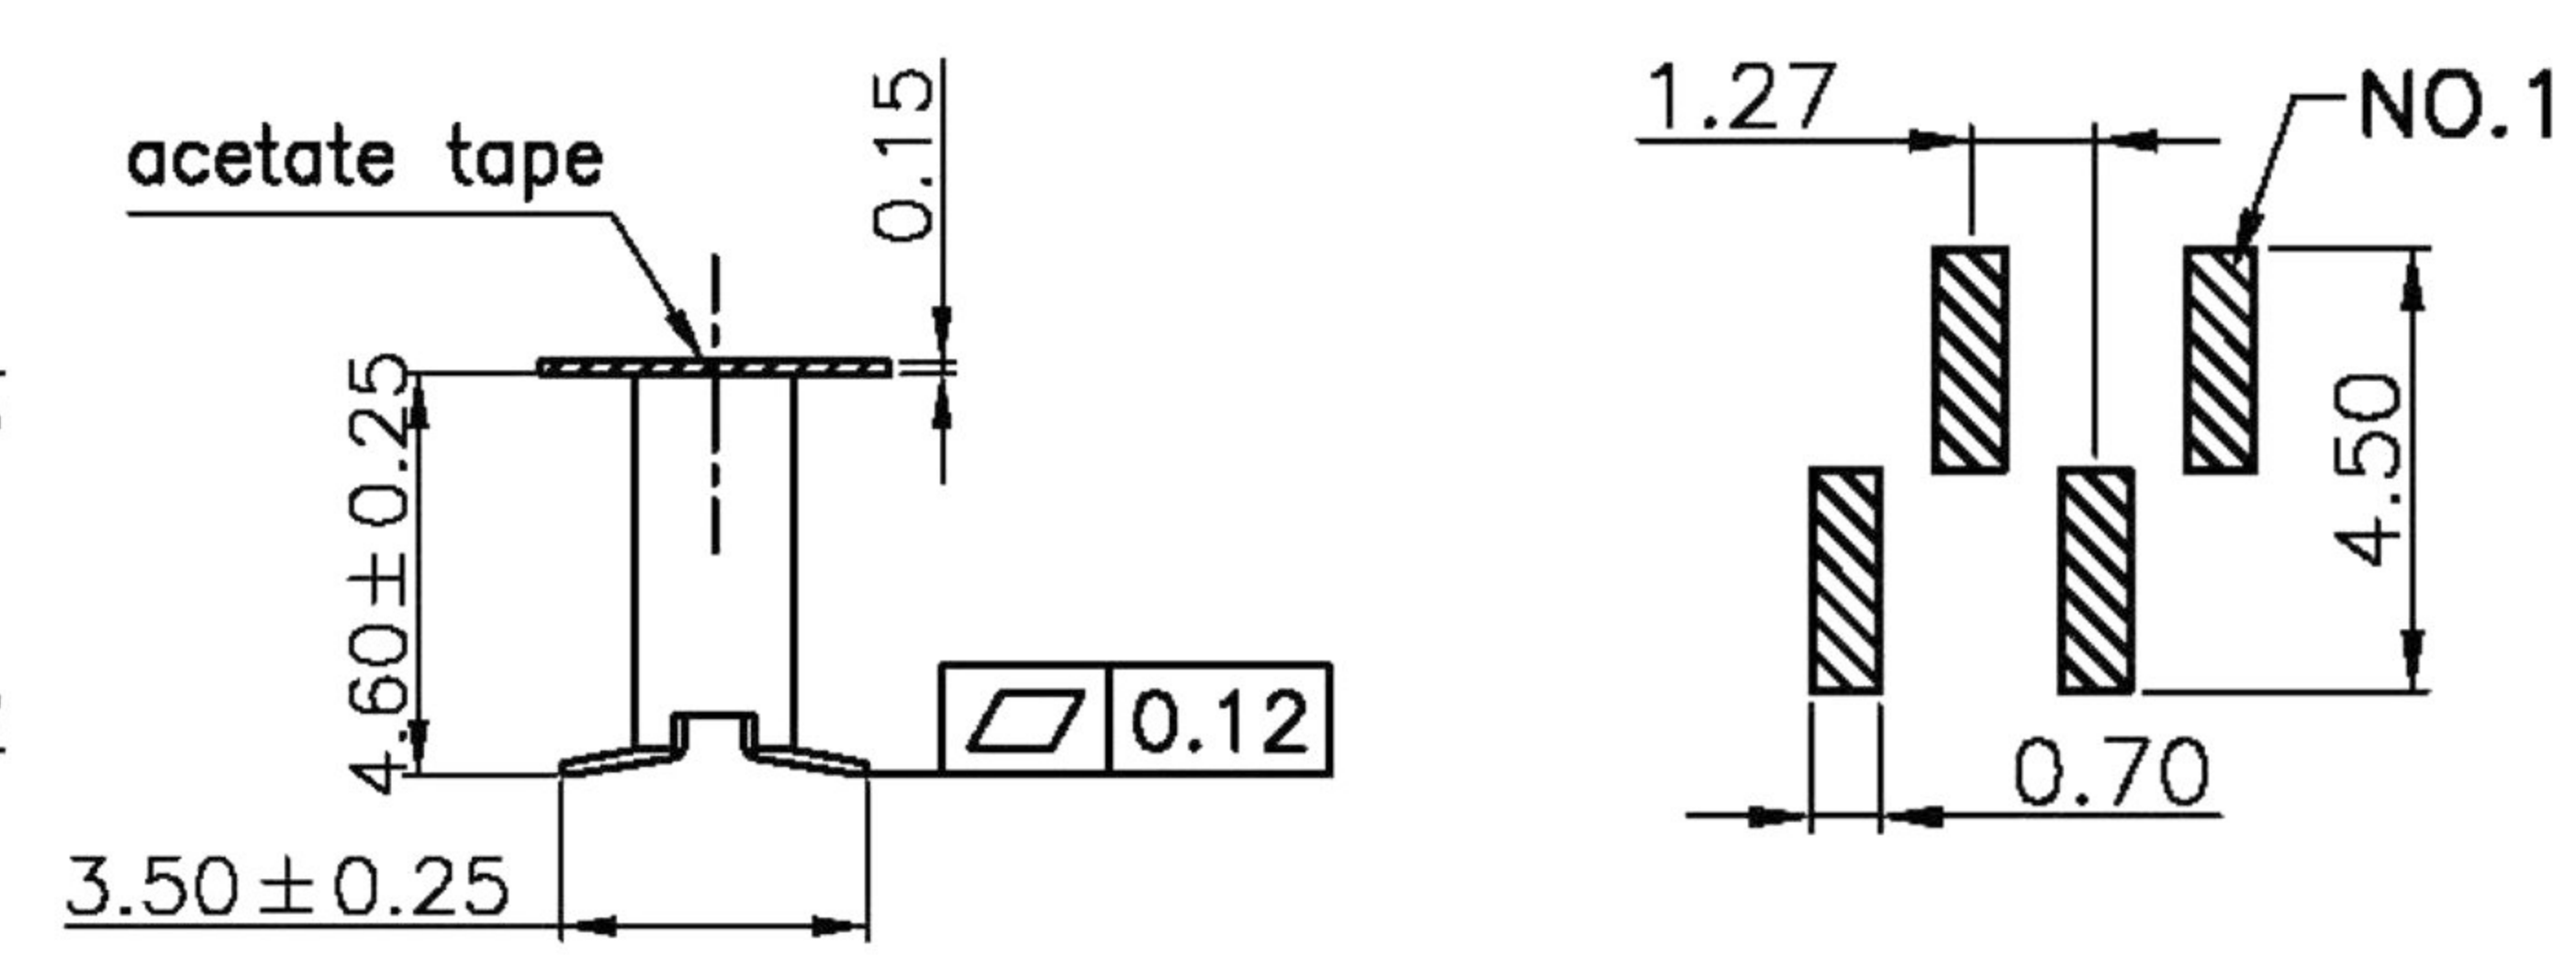

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE .X ± 5% X ± 0.30 .X ± 3% X ± 0.25 .XX ± 2% XX ± 0.15 .XXX ± 1% XXX ± 0.10	PART NAME 品名 1.27mm FEMALE HEADER SINGLE ROW 1XXXP H:4.3mm SMT B2 TYPE BLACK W/O LOCATING PEG FILM+(REEL,TUBE) PACKING ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C4828-XXACXHN(F,C)R
DATE 制表日 2013/01/03	PAGE 張數 1 OF 1	REV. 版次 A	