


Recommended P.C.Board Hole Layout :

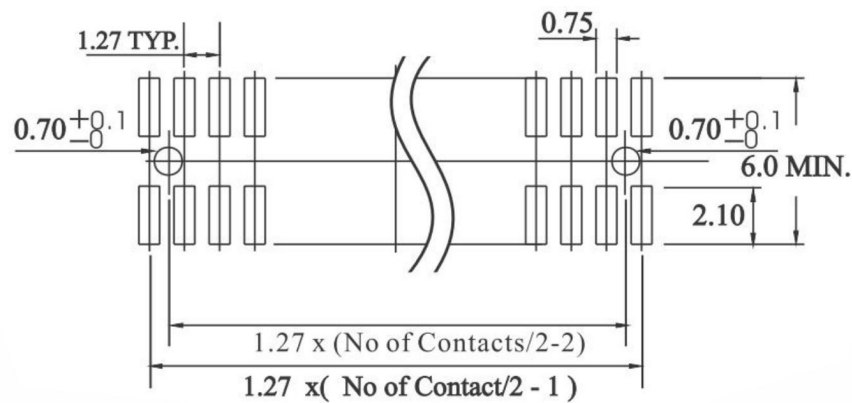

SPECIFICATIONS

- Current rating : 1 Amps
- Dielectric Withstanding : AC 500V
- Contact resistance : 20 Milliohms Max.
- Insulation resistance : 5000 Megohms Min.
- Temperature range : - 40°C ~ + 105°C

MATERIAL :

- Housing : High Temperature Thermoplastic , LCP
- Terminal : Phosphor Bronze

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY	GENAL TOLERANCE X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.15	PART NAME 品名
DWG. 製圖	KAREN		1.27 X 1.27mm FEMALE HEADER DUAL ROW H:4.3mm 2XXXP SMT TYPE GOLD FLASH PLATING W/ INSIDE LOCATING PEGS WITH PAD
DATE 制表日	2015/10/19	UNIT 單位	PART NO.
		SCALE 比例	料號
		PAGE 張數	C4828-XXBDGHAXR
		REV. 版本	
		SIZE. 紙張尺寸	
		1 OF 1	
		A 4	
		B	