


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-9T

Standard: Gold Flash all over

Recommended P.C. Board Hole Layout

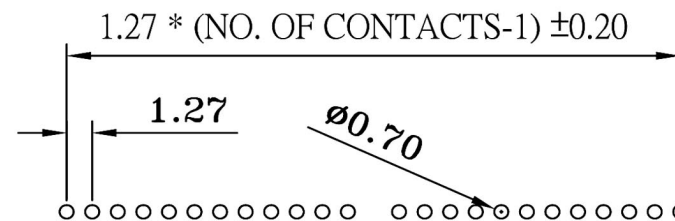

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE 紙張尺寸	1.27mm FEMALE HEADER SINGLE ROW STRAIGHT TYPE 1XXXP H=8.5mm GOLD FLASH PLATING MATERIAL: NYLON 9T ROHS
DATE 制表日	PAGE 張數	REV. 版次	PART NO. 料號
2015/10/16	1 OF 1	A	C4831-XXASGH00B

Betty