


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T

Finish: Tin,Gold Plated
 Standard:Gold Flash all over

Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

Recommended P.C. Board Hole Layout

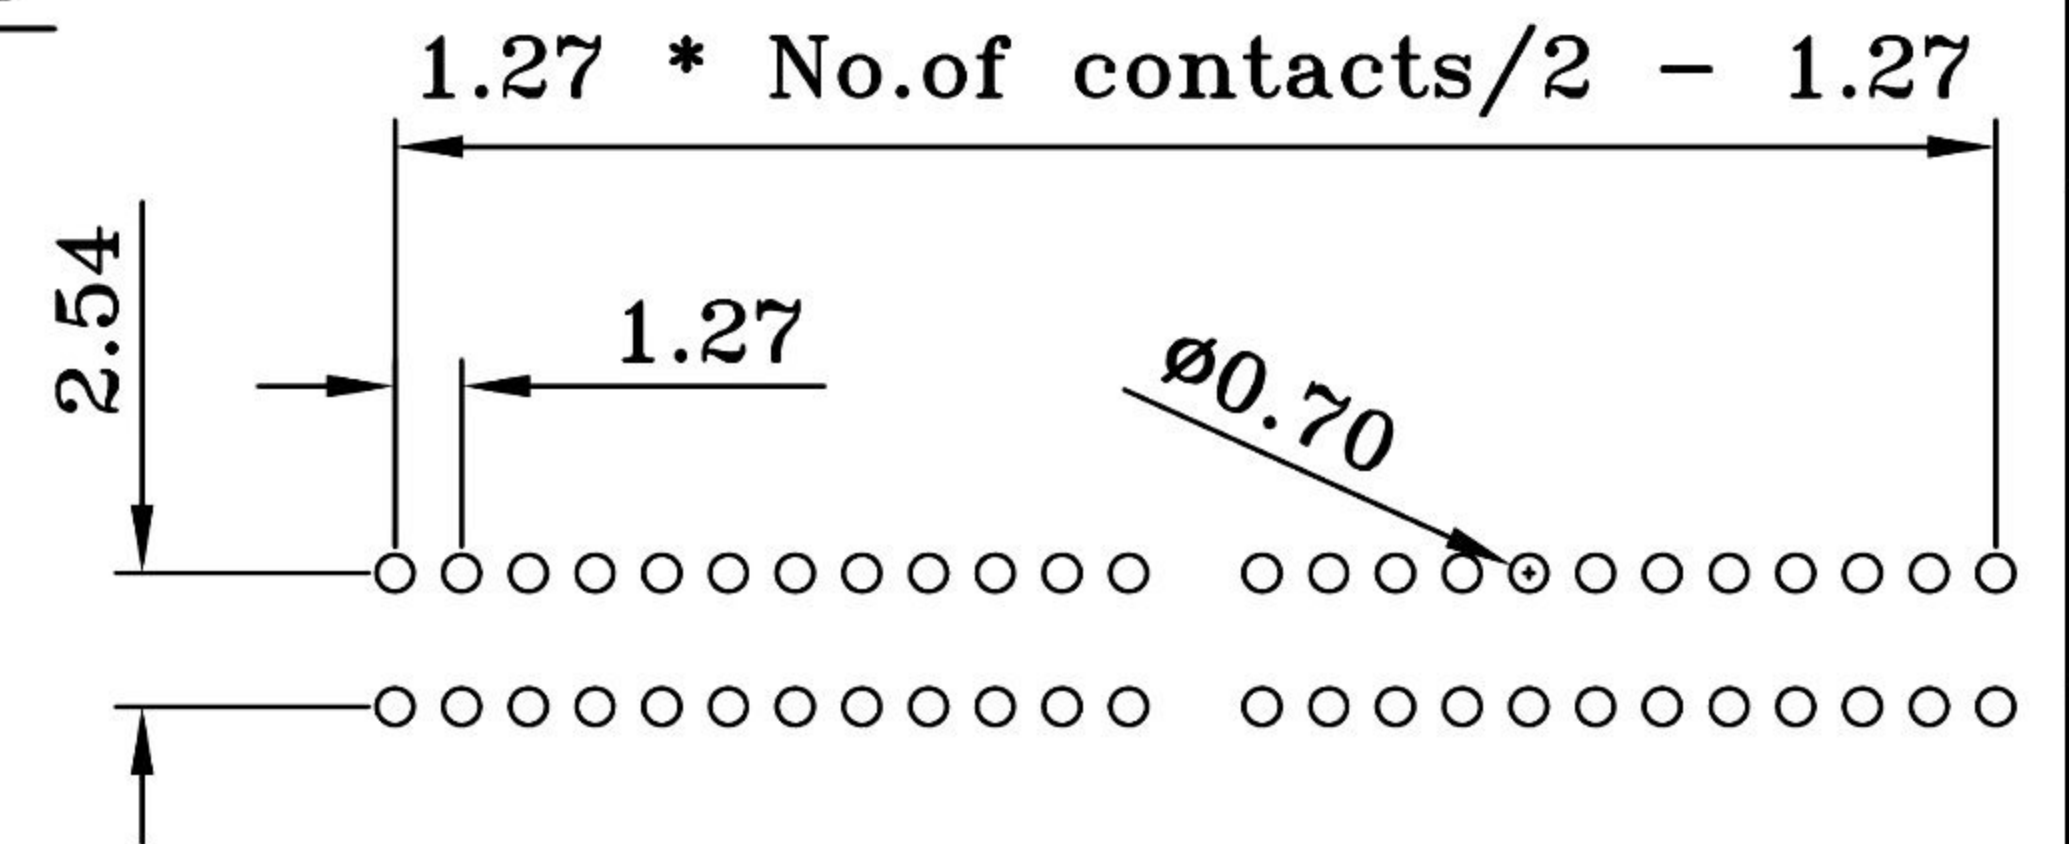

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	TOLERANCE 容許公差 .X ±0.3 .XX ±0.20 .XXX ±0.100	PART NAME 品名 1.27x2.54mm FEMALE HEADER DUAL ROW STRAIGHT TYPE 2XXXP H=8.5mm MATERIAL:NYLON 6T ROHS	
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 MM	SIZE. 紙張尺寸 A 4
DATE 制表日 2015/06/25	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C4831-XXBSXH00L