


Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature (Nylon-9T)  
 Plastic, UL 94V-0

Standard: Gold Flash all over

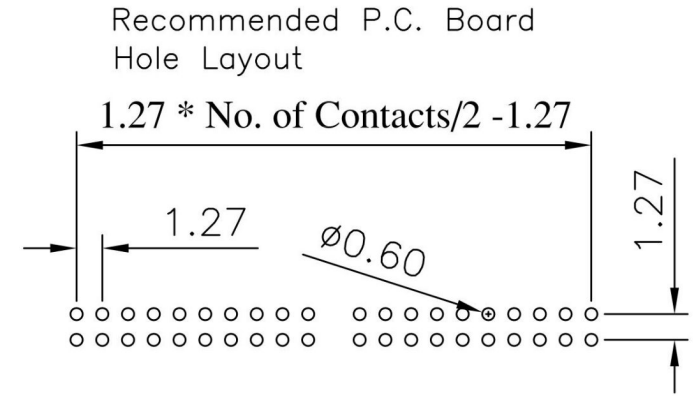

APPD. 核准 <b>HELEN</b>			TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
DWG. 製圖 <b>ABBY</b>				PART NAME 品名 1.27x1.27mm FEMALE HEADER DUAL ROWS 2XXXP STRAIGHT TYPE H=4.4mm GOLD FLASH PLATING WITHOUT LOCATING PEG TUBE PACKING BLACK COLOR MATERIAL: NYLON 9T DIP LENGTH=2.4mm ROHS	
DATE 制表日 2017/12/13		UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 C4833-XXBSGHNTB	
PAGE 張數 1 OF 1		REV. 版次 A			