



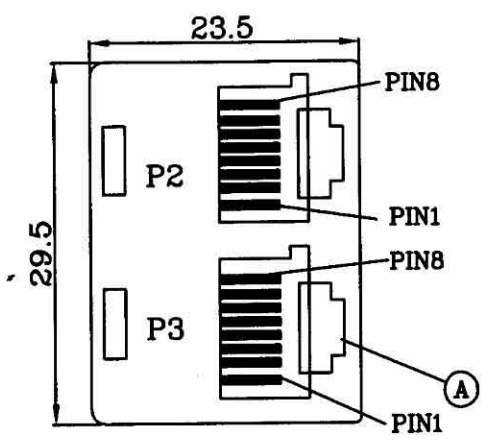
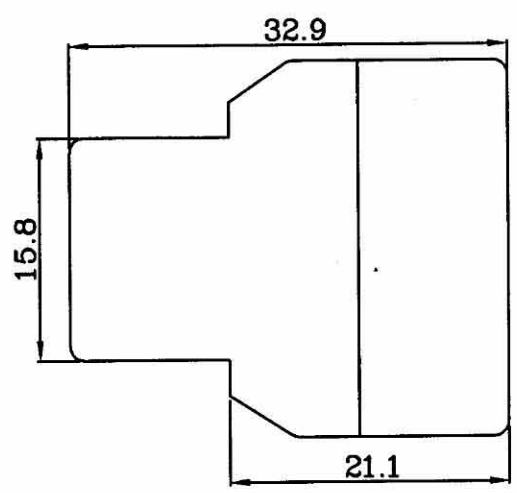



1 2 3 4 5 6 7 8

A
B
C
D
E
F
G

A
B
C
D
E
F
G

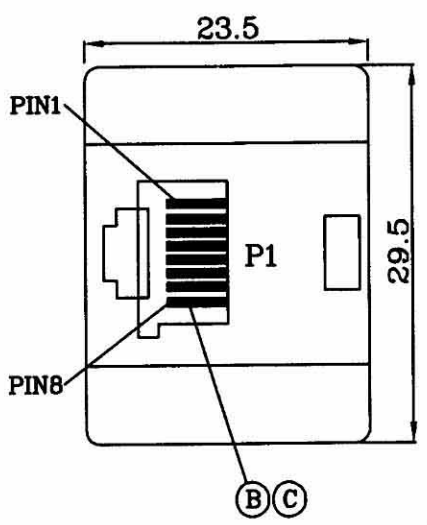

P1	P2	P3	
1	— 1	— 1	BLUE
2	— 2	— 2	ORANGE
3	— 3	— 3	BLACK
4	— 4	— 4	RED
5	— 5	— 5	GREEN
6	— 6	— 6	YELLOW
7	— 7	— 7	BROWN
8	— 8	— 8	WHITE



Specification:
 Current Rating : 1.5-2A
 Voltage Rating : 12V
 Operating Temp : -40°C~+80°C
 Insulation Resistance : 5MΩ
 Dielectric Withstanding Voltage : 300V
 Contact Resistance : 3Ω

ITEM NO.	P/N	DESCRIPTION	UNIT	QTY
C	GOLD WIRE	13MM,15MM GOLD FLUSH (GREEN PART)	PCS	24
B	WIRE	UL#1061 26AWG 50MM (GREEN PART)	PCS	16
A	JACK	US JACK 8P8C ABS 94V-2 IVORY (GREEN PART)	PCS	3

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2006/08/09	 SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1	TOLERANCE 容許公差 0 ± .00 ± ANG. ± SIZE 線規尺寸 A 4 REV. 版本 A	PART NAME 品名 CORD COUPLER 8P8C 2 TO 1 GOLD 3u" IVORY INSULATOR ROHS LOW-LEAD PART NO. 料號 C4901-88BJI000R

1 2 3 4 5 6 7 8

H

H