


Specifications

Current Rating:1.0Amp
 Insulation Resistance:1000MΩMin. \triangle
 Dielectric Withstanding Voltage:300VAC \triangle
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Max Process Temp:230°C for 30~60 sec.
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

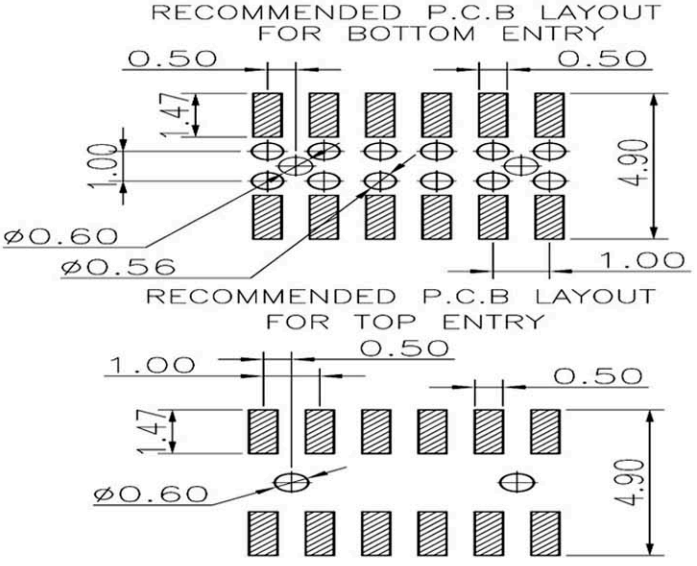

Dim.D	Dim.E	NOTE
3.00mm	3.85mm	03 Pin
\triangle 4.20mm	3.40mm	04~40Pin

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 0 ± 0.35 0.00 ± 0.25 ANG. ± 3°	PART NAME 品名 1.0mm FEMALE HEADER DUAL ROW H:2.1mm 2X??P SMT TYPE GOLD PLATING W/ LOCATING PEG TUBE PACKING MATERIAL:LCP ROHS
DWG. 製圖 Helen	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C5812-XXBDGHYXR
DATE 制表日 2016/12/2	PAGE 張數 1 OF 1	REV. 版本 A	