

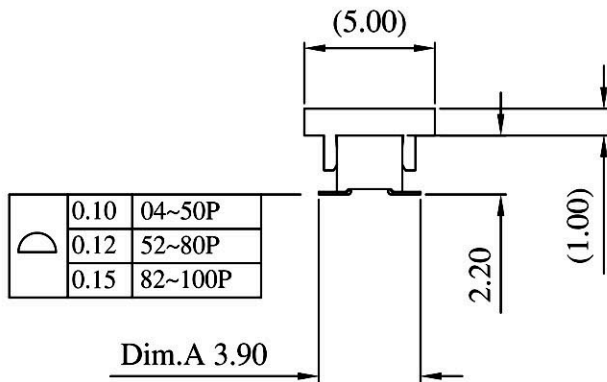


Current Rating and Voltage : 1 Amps 250V AC (r.m.s)  
 Insulator Resistance : 1000 Megohms min  
 Contact Resistance : 20m ohms max  
 Dielectric Withstanding : 300 V AC  
 Contact Resistance : 20m Min.  
 Operating Temperature : - 40° ~ +125° C  
 Max Processing Temp : 230° C for 60 seconds  
 Max Processing Temp : 260° C for 10 seconds  
 Contact Material : Phosphor Bronze  
 Insulator Material : Polyester,UL 94V-0  
 Standard : LCP  
 Finish: Standard: Gold Flash all over

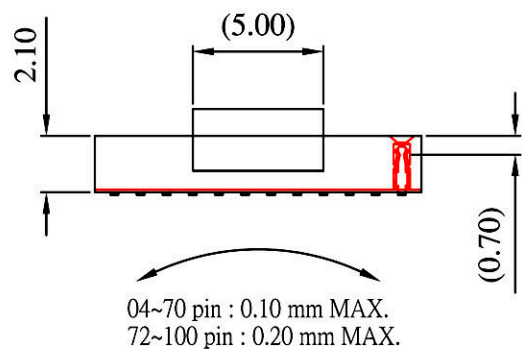

**Recommended P.C. Board SMD Layout**

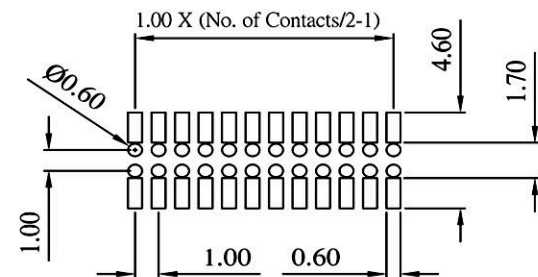

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖 Lena		0 ± 0.3 .00 ± 0.20 .000 ± 0.100	1.0mm FEMALE HEADER DUAL ROW H:2.1mm 2XXXP SMT TYPE W/O LOCATING PEG MATERIAL:LCP ROHS
DATE 制表日 2020/4/15	UNIT 單位 MM	SIZE 板張尺寸 A4	PART NO. 料號 C5812-XXBDXHNXR
	PAGE 張數 1 OF 1	REV. 版本 B	