





1 2 3 4 5 6 7 8

A

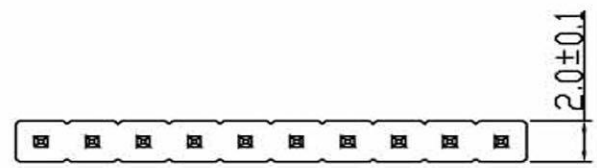

$A = 2.0 * (\text{No of Space} - 1)$
 $B = A + 2.0$

B

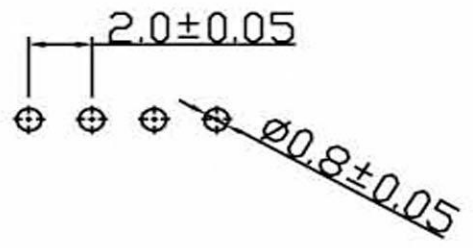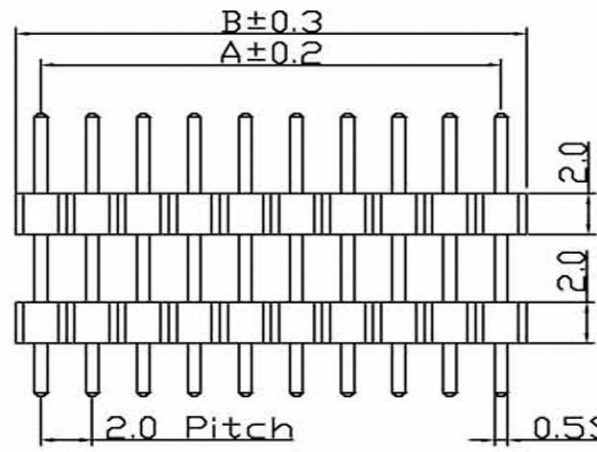

P.C. Board Layout

C

D

E

C=3.2mm D=3.2mm E=11mm F=17.4mm

SPECIFICATION:

- Current Rating : 1 Amp
- Insulator Resistance : 5000 Megohms Min.
- Contact Resistance : 20 Milliohms Max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C

Material

- Contact : Brass
- Insulator : 30% Glass fiber PBT

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE 容許公差 0 ± 0.3 .00 ± ANG ±	PART NAME 品名 2.0mm PIN HEADER DUAL INSULATOT SINGLE ROW 1XXXP STRAIGHT TYPE H=2.0mm ROHS (C=3.2mm D=3.2mm E=11.0mm F=17.4mm)
DWG. 製圖 ABBY	SCALE 比例 參考	SIZE 紙張尺寸 A4	PART NO. C6100-XXESXKA0R
DATE 制表日 2012/08/29	PAGE 張數 1 OF 1	REV. 版本 B	料號

H

1 2 3 4 5 6 7 8