


2° MAX TOE
(EITHER DIRECTION)
AT THE TOP

Specifications

- Current Rating: 2.0Amp
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding Voltage: 500VAC
 - Contact Resistance: 20mΩ Max.
 - Operating Temperature: -40°C to +105°C
- Materials**

Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)

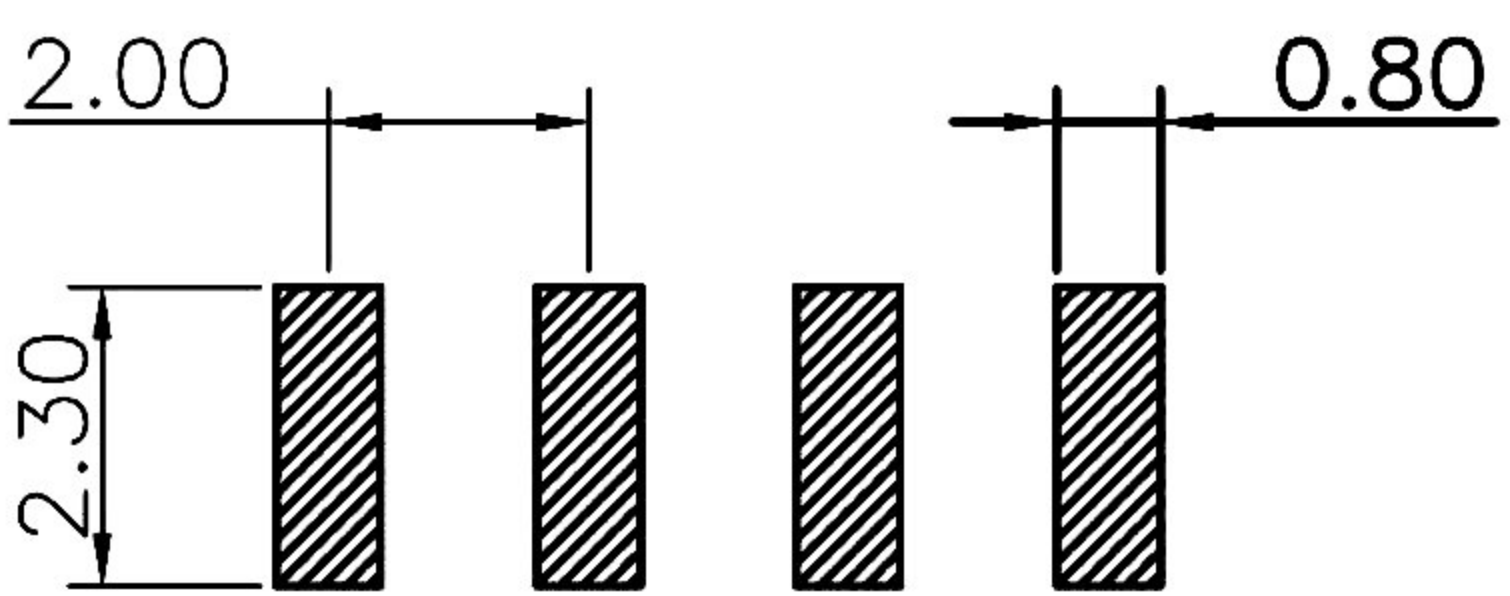

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE X. ± 5.0' X. ± 0.30 .X ± 3.0' .X ± 0.25 .XX ± 2.0' .XX ± 0.15 .XXX ± 1.0' .XXX ± 0.10	PART NAME 品名 2.0mm PIN HEADER SINGLE ROW HORIZONTAL SMT TYPE 1XXXP H=1.5mm(W=2.0mm) WITHOUT LOCATING PEG (C=3.2mm D=3.0mm E=1.27mm) ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C6102-XXADXBBXNR
DATE 制表日 2020/07/28	PAGE 張數 1 OF 1	REV. 版次 A	