


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Copper alloy
 Insulator Material: Polyester, UL94V-0
 NYLON-6T

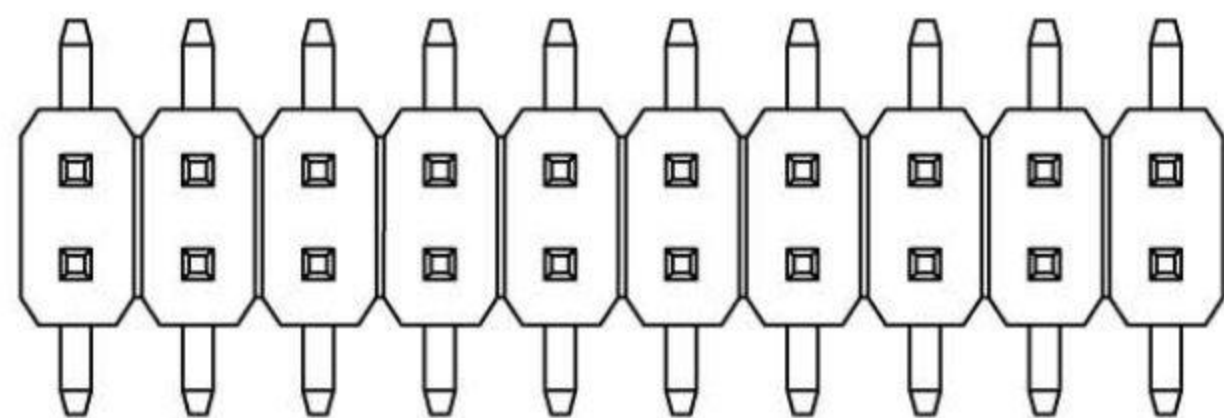

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
03	4.00	6.20	13	24.00	26.20	23	44.00	46.20	33	64.00	66.20
04	6.00	8.20	14	26.00	28.20	24	46.00	48.20	34	66.00	68.20
05	8.00	10.20	15	28.00	30.20	25	48.00	50.20	35	68.00	70.20
06	10.00	12.20	16	30.00	32.20	26	50.00	52.20	36	70.00	72.20
07	12.00	14.20	17	32.00	34.20	27	52.00	54.20	37	72.00	74.20
08	14.00	16.20	18	34.00	36.20	28	54.00	56.20	38	74.00	76.20
09	16.00	18.20	19	36.00	38.20	29	56.00	58.20	39	76.00	78.20
10	18.00	20.20	20	38.00	40.20	30	58.00	60.20	40	78.00	80.20
11	20.00	22.20	21	40.00	42.20	31	60.00	62.20			
12	22.00	24.20	22	42.00	44.20	32	62.00	64.20			

Recommended P.C.Board Layout

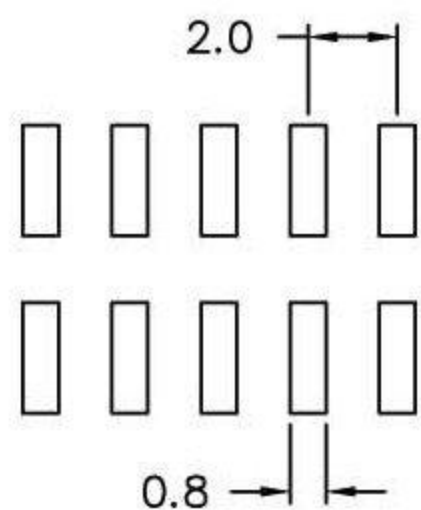

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE .X ± 0.38 .XX ± 0.25 .XXX ± 0.13 AWG	PART NAME 品名 2.0mm PIN HEADER DUAL ROW 2XXXP SMT TYPE H=2.0mm (C=4.0mm D=6.2mm E=2.7mm) ROHS
DWG. 製圖 ABBY		UNIT 單位 MM	SIZE 紙張尺寸 A4
DATE 制表日 2012/08/17	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 C6200-XXBDXAT0R