


1 2 3 4 5 6 7 8

A

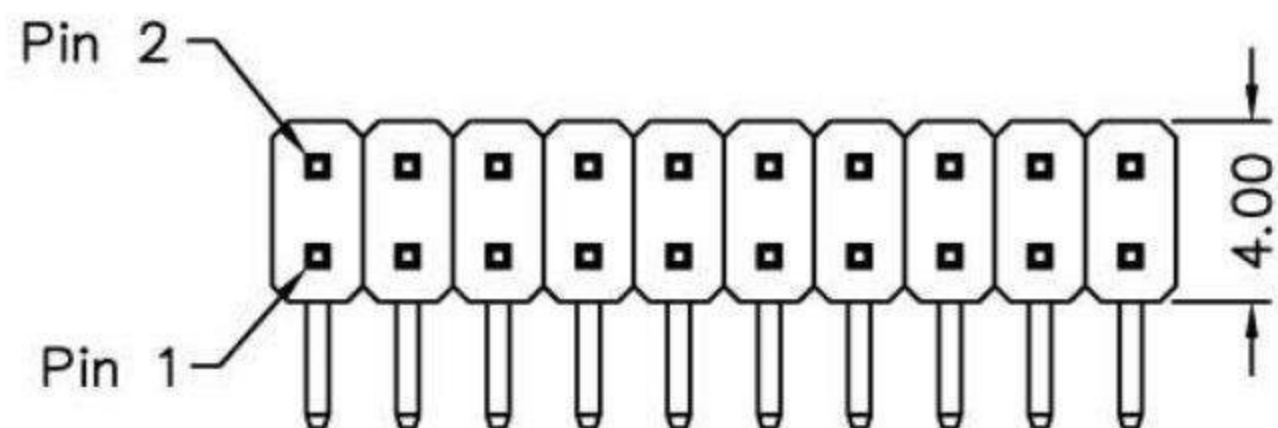

B

SPECIFICATIONS

Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C



MATERIAL

Insulator : 30% Glass fiber PBT
 Contact Pin : Brass

C

POLES	DIM E	POLES	DIM E
		23	44.00
2	2.00	24	46.00
3	4.00	25	48.00
4	6.00	26	50.00
5	8.00	27	52.00
6	10.00	28	54.00
7	12.00	29	56.00
8	14.00	30	58.00
9	16.00	31	60.00
10	18.00	32	62.00
11	20.00	33	64.00
12	22.00	34	66.00
13	24.00	35	68.00
14	26.00	36	70.00
15	28.00	37	72.00
16	30.00	38	74.00
17	32.00	39	76.00
18	34.00	40	78.00
19	36.00	41	80.00
20	38.00	42	82.00
21	40.00	43	84.00
22	42.00	44	86.00

D

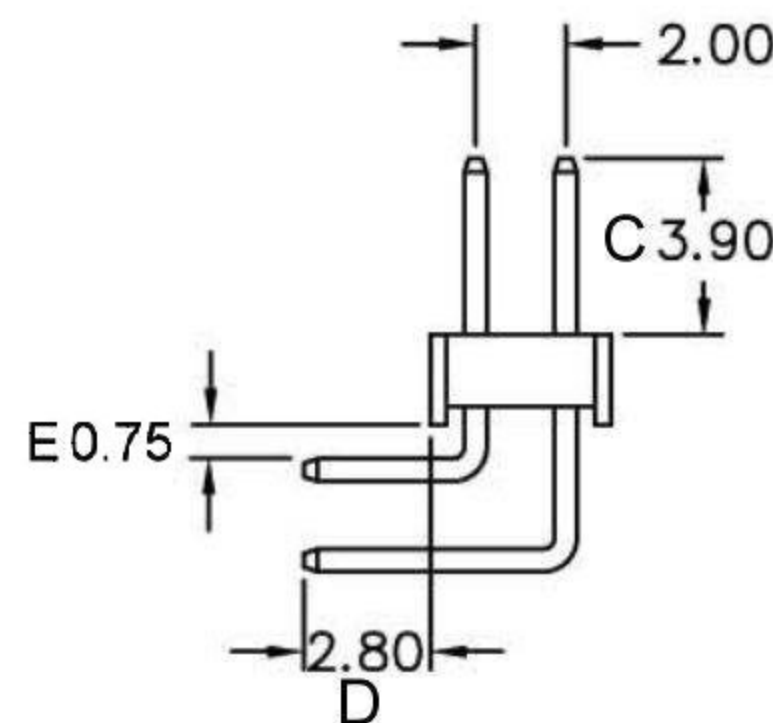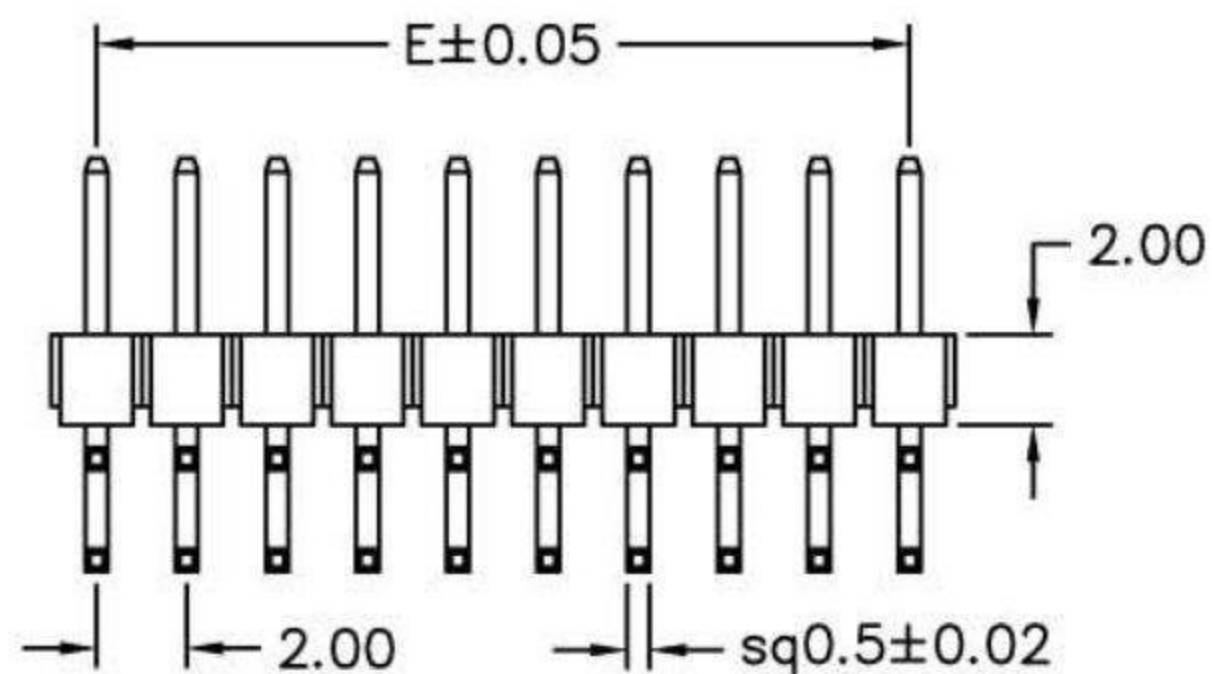


C= 3.9 mm D= 2.8 mm E= 0.75 mm

E

F

G

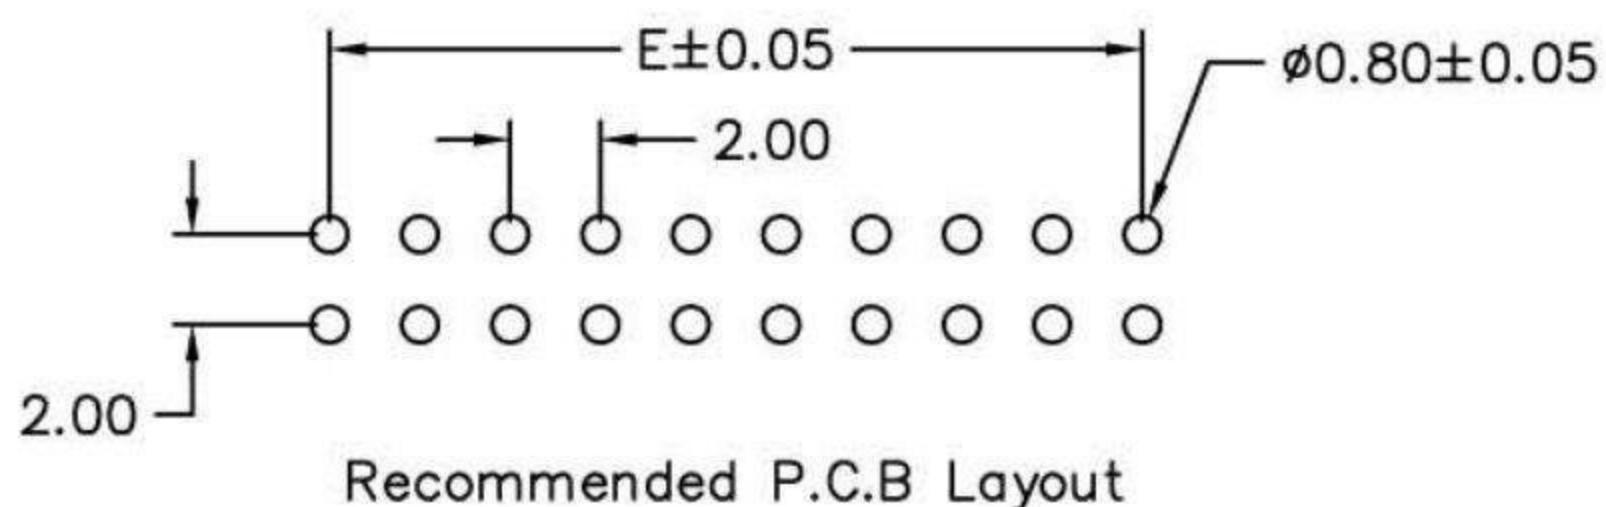

H

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .0 ±0.30 .00 ±0.20 ANG. ±3°	PART NAME 品名 2.0mm PIN HEADER DUAL ROW 2XXXP RIGHT ANGLE TYPE H=2.0mm (C=3.9mm D=2.8mm E=0.75mm F=2.0mm) ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C6200-XXBRXAR0R
DATE 制表日 2012/08/17	PAGE 張數 1 OF 1	REV. 版次 B	

1 2 3 4 5 6 7 8