
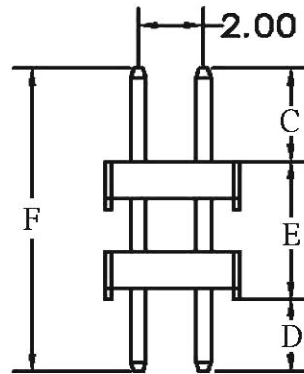


RECOMMENDED P.C.B LAYOUT

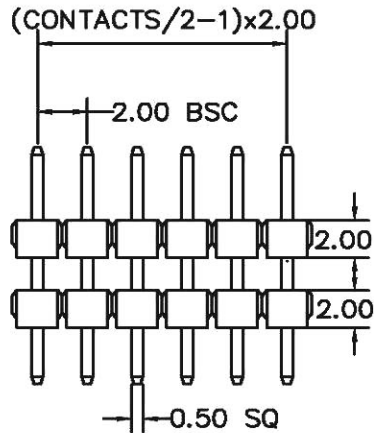

C=10.00mm D=3.0mm E=20.0mm F=33.0mm

CONTACTS	2X21
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

**MATERIAL**  
 HOUSING : PBT, UL94V-0  
 CONTACT : COPPER ALLOYS  
 PLATED : CONTACT PLATED WITH GOLD AND  
 SOLDER PLATED WITH TIN GOLD PLATED  
 TEST POINT WITH 2mm.  
 COLOR : NATURAL(BLACK)

**SPECIFICATION**  
 CURRENT: 1A  
 OPERATING TEMPERATURE: -55°C TO +125°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE: AC 1000V RMS

RoHS Compliant		<b>HSM 玄茂科技股份有限公司</b> HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 零件公差 0 ± 0.38 .00 ± 0.25 ANG. ± 5°	PART NAME 品名 2.0mm PIN HEADER DUAL ROWS DUAL INSULATORS 2XXXP STRAIGHT TYPE H=2.0mm (C=10mm D=3.0mm E=20mm F=33mm) ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	PART NO. 料號 C6200-XXFSXVB0R
DATE 制表日 2015/06/09	PAGE 張數 1 OF 1	REV. 版本 A	