



CONTACTS	4*16
4*2	4*17
4*3	4*18
4*4	4*19
4*5	4*20
4*6	4*21
4*7	4*22
4*8	4*23
4*9	4*24
4*10	4*25
4*11	4*26
4*12	4*27
4*13	4*28
4*14	4*29
4*15	4*30

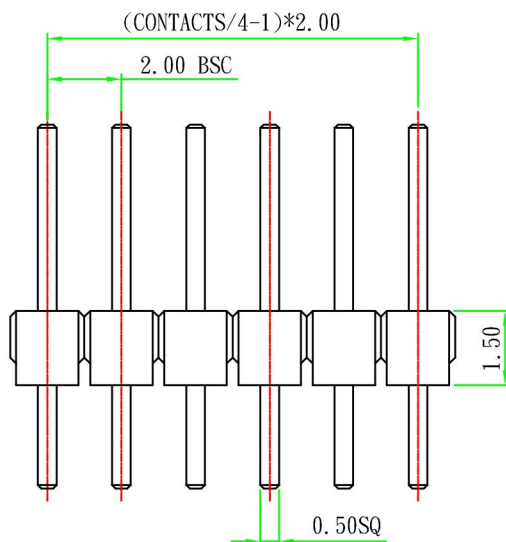

RECOMMENDED P. C. B LAYOUT

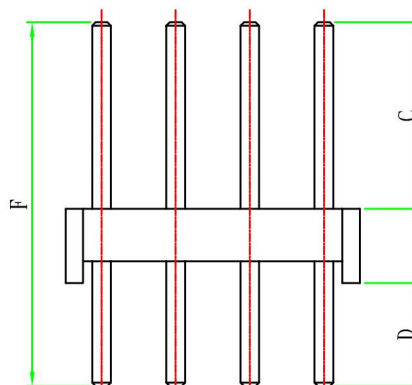

F: 8.3mm C: 4.4mm D: 2.4mm

MATERIAL

HOUSING: THERMOPLASTIC UL94V-0
CONTACT: COPPER ALLOYS

SPECIFICATION

CURRENT: 3A
OPERATING TEMPERATURE: -55°C to +105°C
CONTACT RESISTANCE: 20MILLIOHMS MAX.
INSULATION RESISTANCE: 1000MEGAOHMS MIN.
WITHSTANDING VOLTAGE: AC 1000V RMS



HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. Helen	 TOLERANCE .0 ± .00 ± ANG. ±	PART NAME 品名 2.0mm PIN HEADER FOUR ROWS H=1.5mm 4*XXP STRAIGHT TYPE (C=4.4mm D=2.4mm) ROHS LOW-LEAD
DWG. Yumi		
DATE 2009/10/23	UNIT 参考 M M PAGE 1 OF 1 REV. A	PART NO. 料號 C6415-XXDSXBA0R