
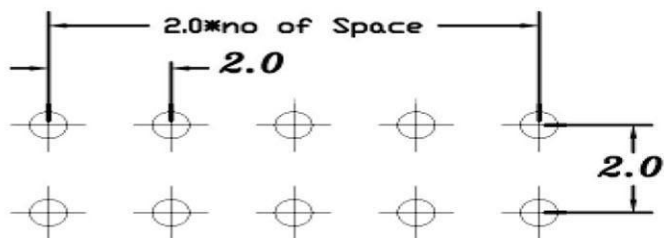
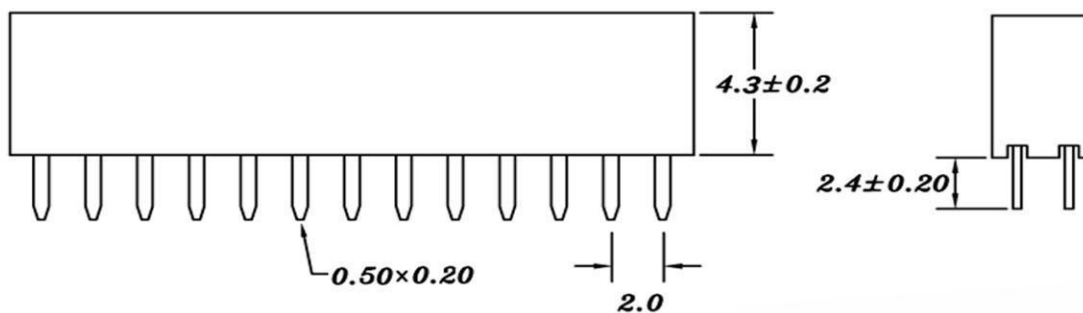


**SPECIFICATION**

Current Rating: 1Amp  
 Insulator Resistance: 5000 Megohms Min.  
 Contact Resistance: 20 Milliohms Max.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°C~+105°C  
 Max Processing Temp: 230°C For 60 Seconds  
 260°C For 10 Seconds  
 Insulator Material: Polysphor, UL 94V-0  
 Standard: Nylon-6T  
 Contact Material: Phosphor Bronze.  
 Finish: Gold Flash All Over

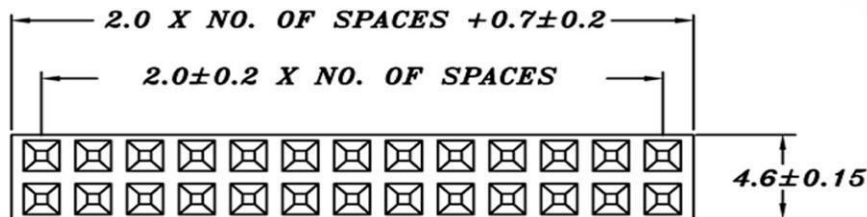

*Pc Board Layout*

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 0 ± 0.25 .00 ± 0.2 ANG ±	PART NAME 品名 2.0mm FEMALE HEADER DUAL ROW H:4.3mm W:4.6mm 2X??P STRAIGHT TYPE GOLD PLATING BLACK INSULATOR ROHS
DWG. 製圖 Helen	SCALE 比例 參 考	UNIT 單位 M M	PART NO. 料 號 C6801-XXBSGD00R
DATE 制表日 2012/9/3	PAGE 張數 1 OF 1	REV. 版本 B	