



SPECIFICATIONS

Material


Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze

Electrical


Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

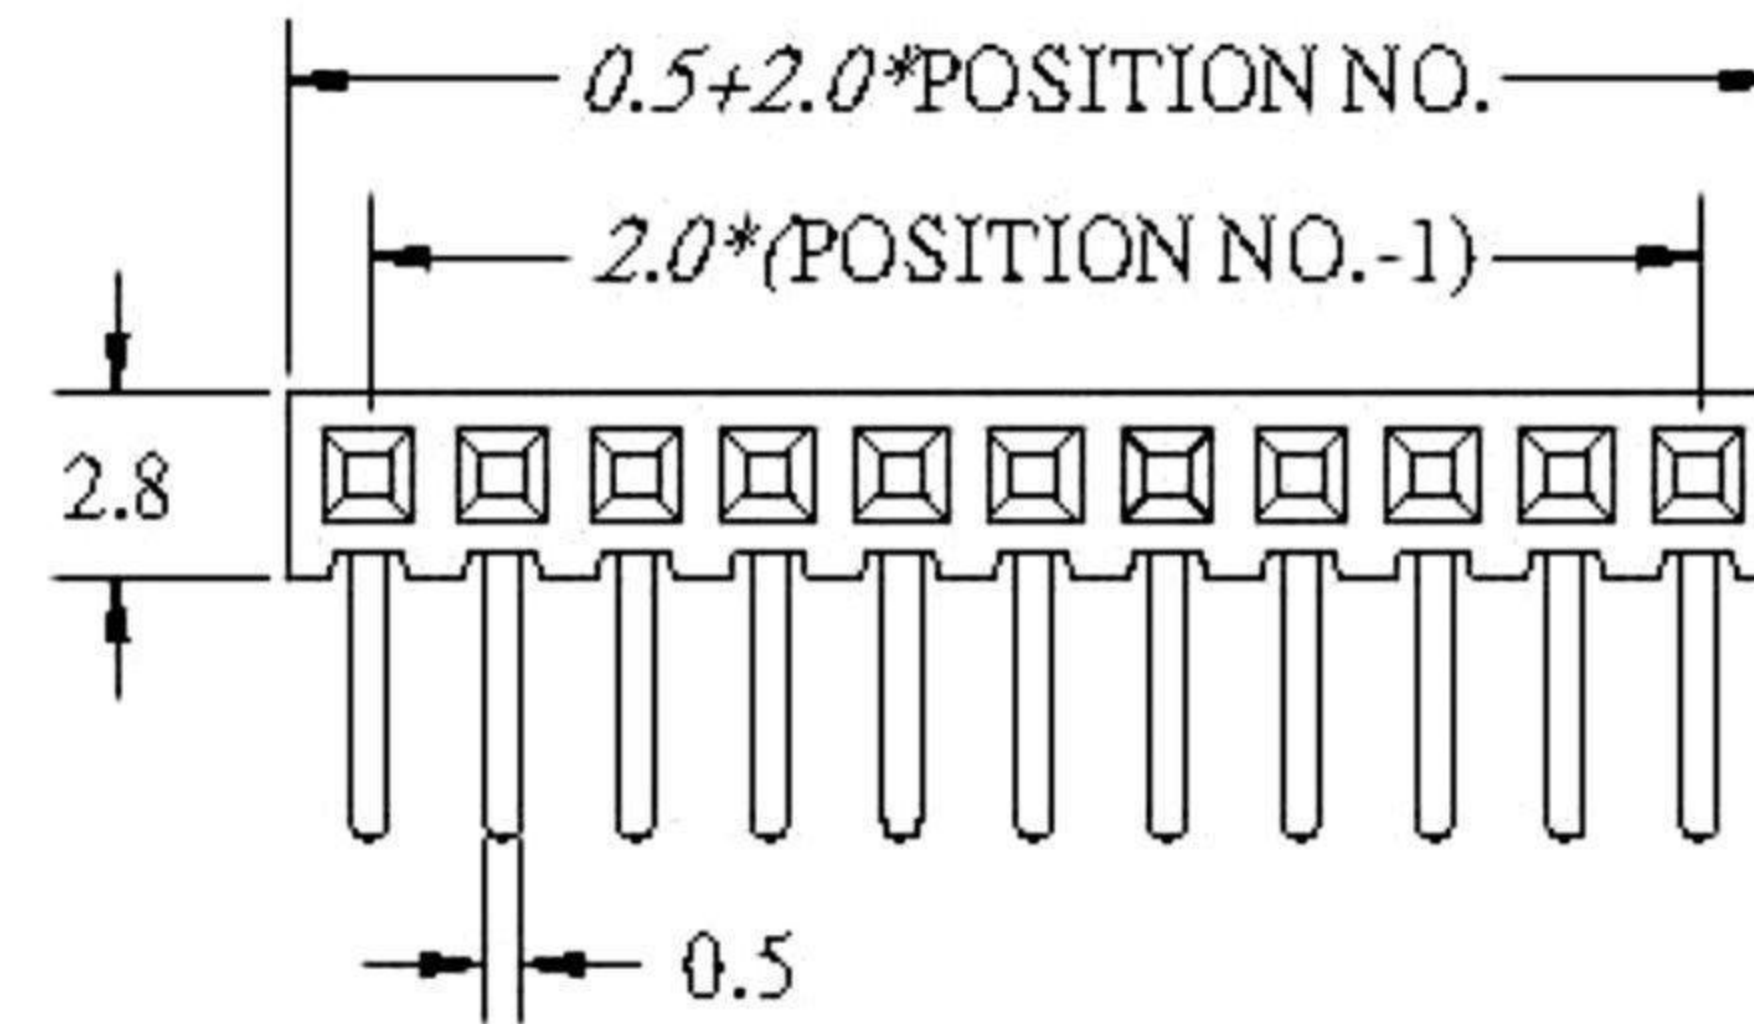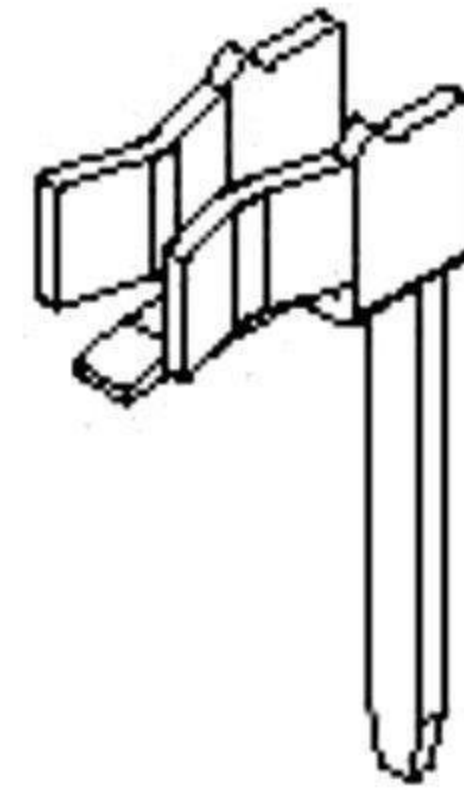

(TYPE C)

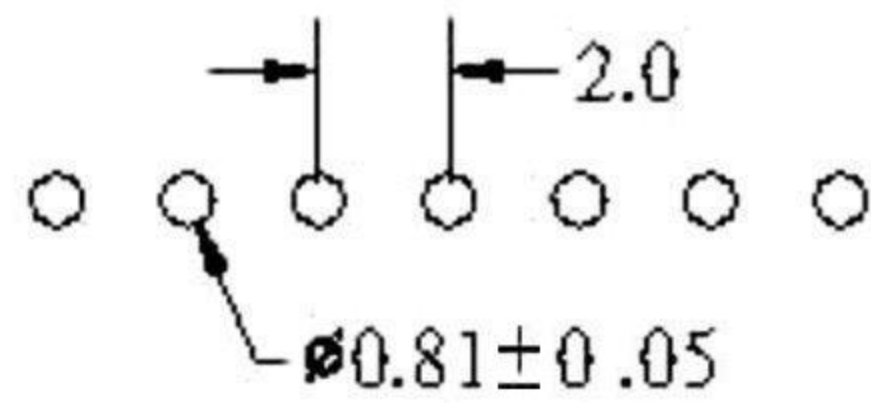

RECOMMENDED P.C.B LAYOUT

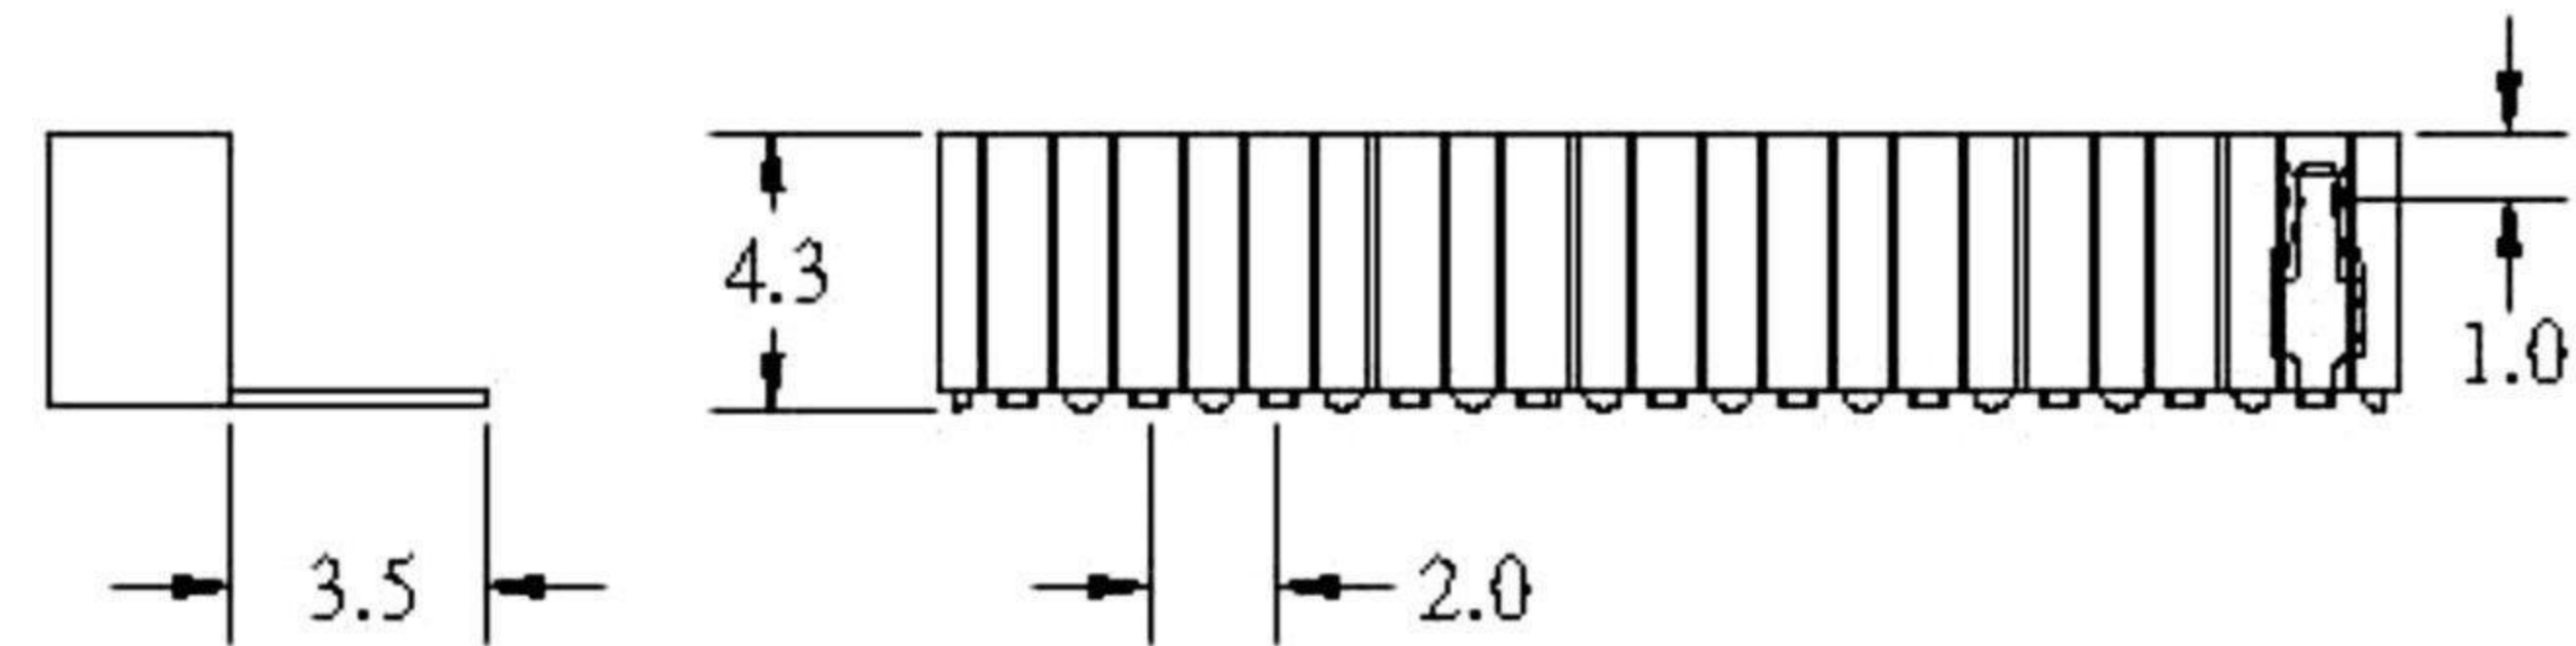

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2.0X2.0mm FEMALE HEADER SINGLE ROW RIGHT ANGLE 1XXXP WAVY TYPE H=4.3mm W=2.8 TYPE C BLACK COLOR ROHS	
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日 2012/08/13	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 C6803-XXARXC00R