

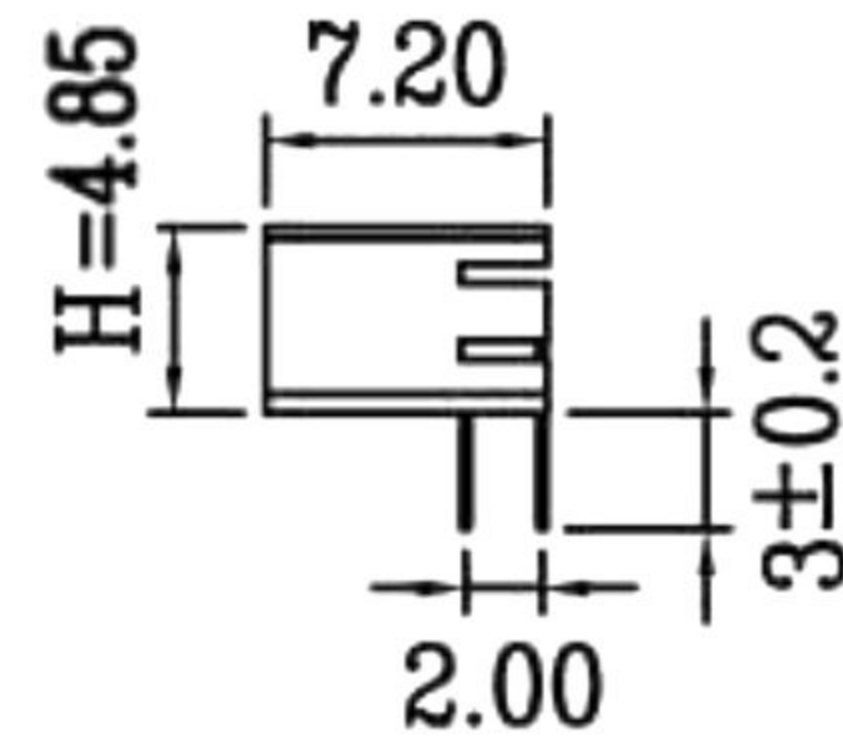
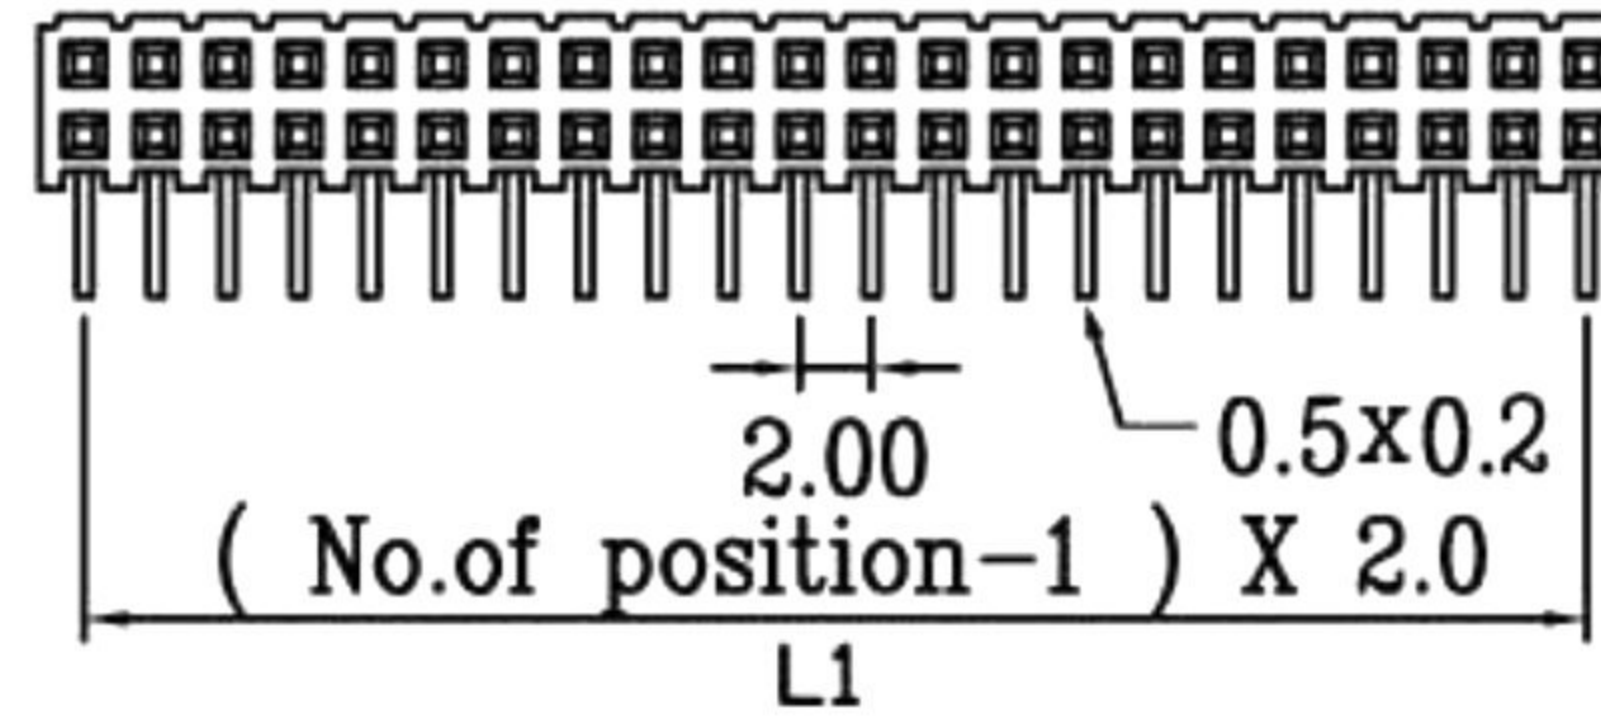


Cir-cuits	Dimension (mm)	
	L1	L2
2x2	2.00	4.50
2x3	4.00	6.50
2x4	6.00	8.50
2x5	8.00	10.50
2x6	10.00	12.50
2x7	12.00	14.50
2x8	14.00	16.50
2x9	16.00	18.50
2x10	18.00	20.50
2x11	20.00	22.50
2x12	22.00	24.50
2x13	24.00	26.50
2x14	26.00	28.50
2x15	28.00	30.50
2x16	30.00	32.50
2x17	32.00	34.50
2x18	34.00	36.50
2x19	36.00	38.50
2x20	38.00	40.50
2x21	40.00	42.50
2x22	42.00	44.50
2x23	44.00	46.50
2x24	46.00	48.50
2x25	48.00	50.50
2x26	50.00	52.50
2x27	52.00	54.50
2x28	54.00	56.50
2x29	56.00	58.50
2x30	58.00	60.50
2x31	60.00	62.50
2x32	62.00	64.50
2x33	64.00	66.50
2x34	66.00	68.50
2x35	68.00	70.50
2x36	70.00	72.50
2x37	72.00	74.50
2x38	74.00	76.50
2x39	76.00	78.50
2x40	78.00	80.50

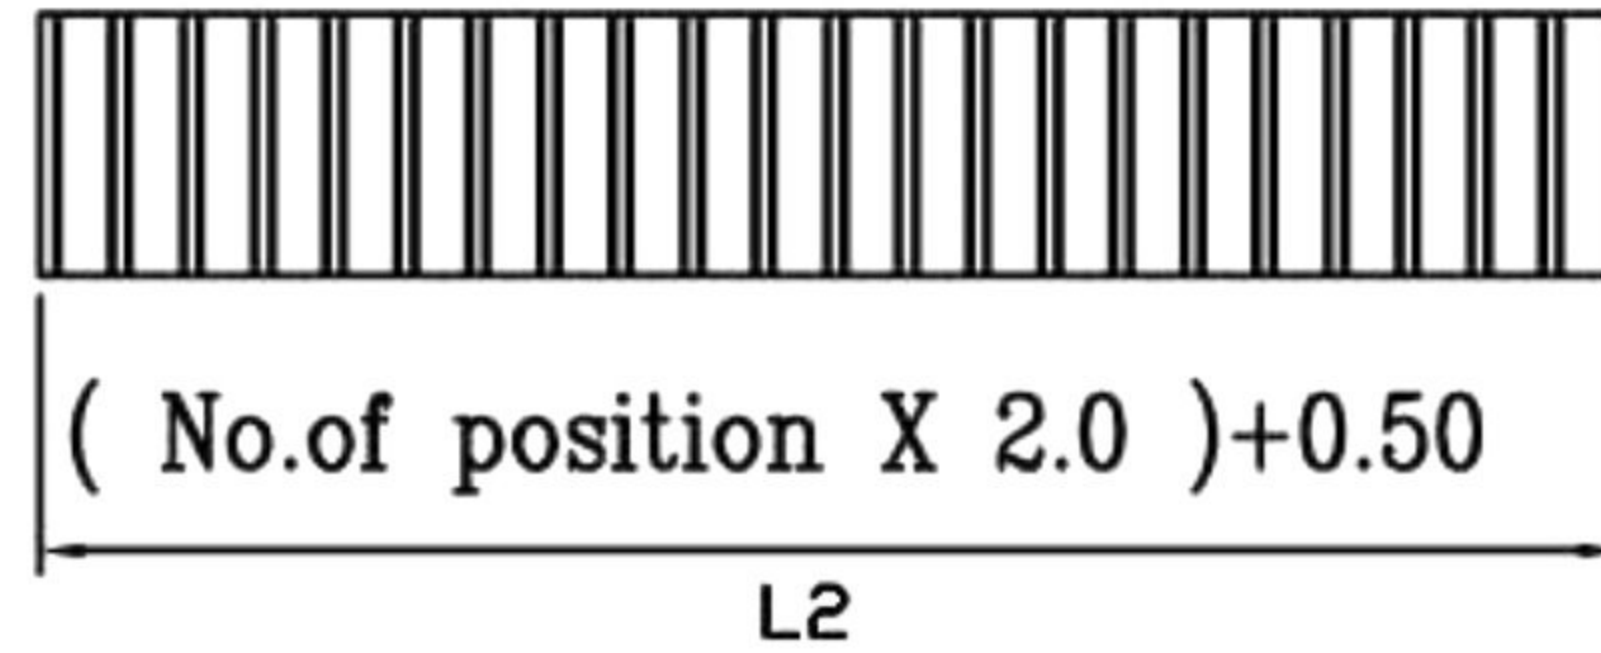

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Contacts resistance :20 m ohms max.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: NL-9T (UL 94 V-0)

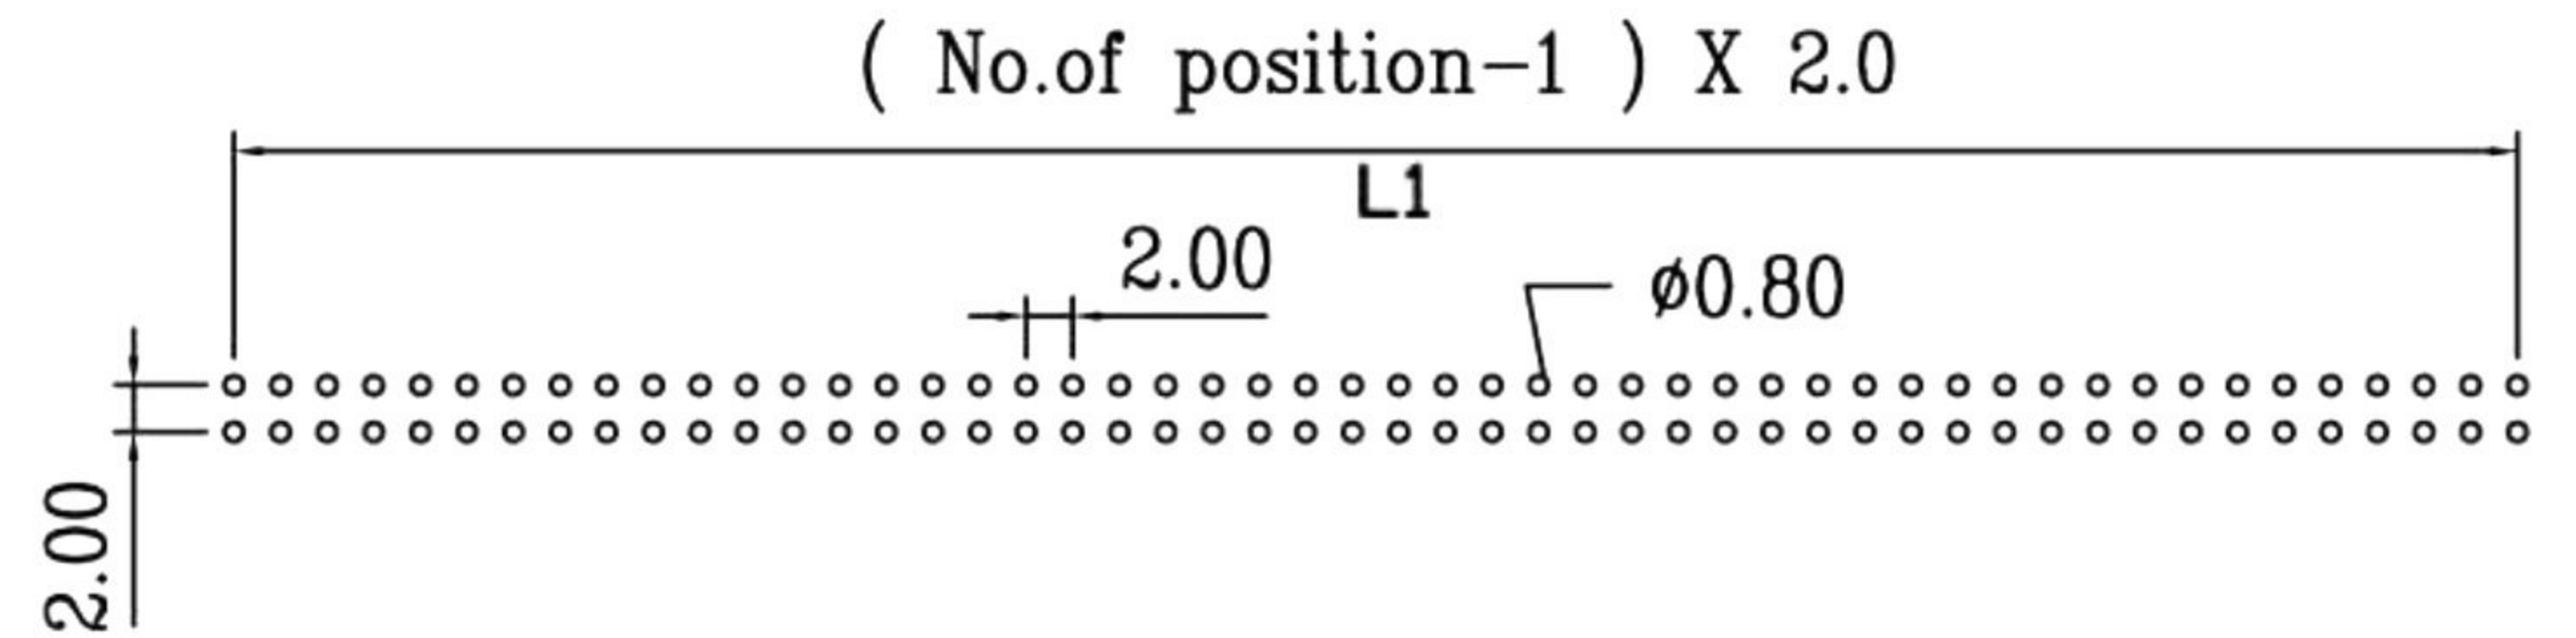

P.C.B.layout

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2.0X2.0mm FEMALE HEADER DUAL ROW RIGHT ANGLE 2XXXP H=7.2mm W=4.8 TYPE A ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C6803-XXBRXA00R
DATE 制表日 2012/09/10	PAGE 張數 1 OF 1	REV. 版次 B	