
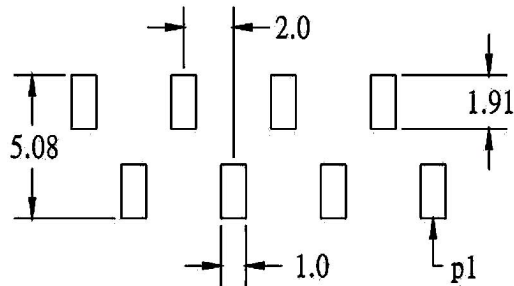



(TYPE A)

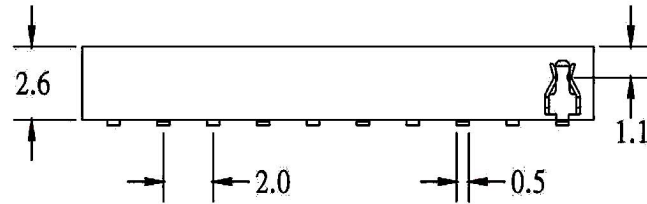

RECOMMENDED P.C.B LAYOUT

**Material**

Insulator : LCP, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

**Electrical**

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C



RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	 SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 2.0mm FEMALE SINGLE ROW SMT A TYPE H=2.7mm 1XXXP UPPER CONTACT WITHOUT LOCATING PEG ROHS
DWG. 製圖 Betty		UNIT 單位 MM	SIZE 紙張尺寸 A 4
DATE 制表日 2014/01/16	PAGE 張數 1 OF 1	REV. 版次 A	