
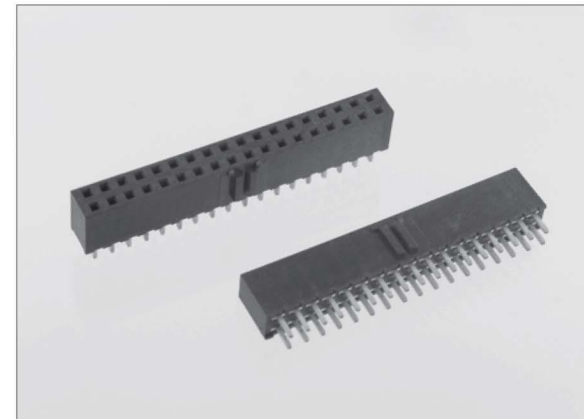


1 2 3 4 5 6 7 8

A

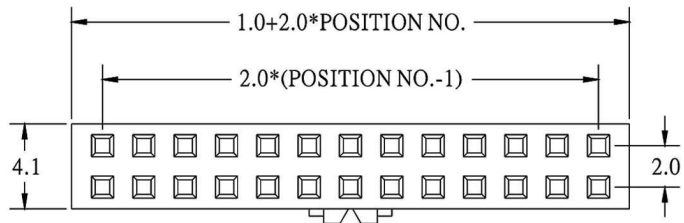

A

B




B

C

C

D

D

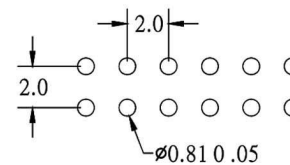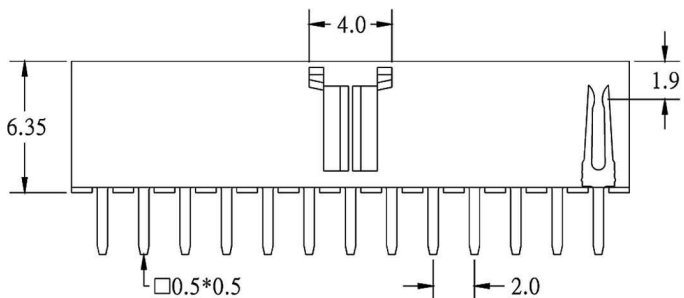

RECOMMENED P.C.B. LAYOUT

E

E

F

F

**SPECIFICATIONS**

**Material**

Insulator: LCP glass reinforced, rated UL 94V-0  
 Contact: Phosphor Bronze

**Electrical**

Current Rating: 1 Amp  
 Contact Resistance: 30 mΩ max.  
 Insulation Resistance: 3000 MΩ min.  
 Dielectric Withstanding Voltage: 500V AC for 1minute  
 Operating Temperature: -40°C to +105°C

H

H

RoHS Compliant		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 <b>BETTY</b>		TOLERANCE 容許公差 .0 ± 0.2 .00 ± ANG. ±	PART NAME 品名 2.0mm FEMALE HEADER DUAL ROW 2XXXP H:6.3mm W/ LATCH BUMP STRAIGHT TYPE BLACK INSULATOR ROHS
DWG. 製圖 <b>BETTY</b>	SCALE 比例 參考	UNIT 單位 M M	PART NO. 料號 C6807-XXBSXH00R
DATE 制表日 2008/07/31	PAGE 張數 1 OF 1	REV. 版本 B	

1 2 3 4 5 6 7 8